

OSP-E Modular Electric Rod Cylinders

ORIGA SYSTEM PLUS
PDE2705TCUK



ENGINEERING YOUR SUCCESS.

**Important**

Before attempting any external or internal work on the cylinder or any connected components, make sure the cylinder is vented and disconnect the air supply in order to ensure isolation of the air supply.

**Note**

All technical data in this catalogue are typical data only. Air quality is essential for maximum cylinder service life (see ISO 8573).

**WARNING**

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

SALE CONDITIONS

The items described in this document are available for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any sale contract entered into by Parker will be governed by the provisions stated in Parker's standard terms and conditions of sale (copy available upon request).

OSP Concept

Origa System Plus

Electric Actuator OSP-E, Modular Components - Overview	6
Applications for OSP-E Actuators	10

Belt Actuator

OSP-E..BHD, Belt Actuator with Integrated Guide	12
— Ball Bearing Guide	15
— Roller Guide	20
OSP-E..BV, Vertical Belt Actuator with Integrated Ball Bearing Guide	26
OSP-E..B, Belt Actuator with Internal Plain Bearing Guide	36

Screw Actuator

OSP-E..SB, Ball Screw Actuator with Internal Plain Bearing Guide	48
OSP-E..ST, Trapezoidal Screw Actuator with Internal Plain Bearing Guide	60

Linear Guides

SLIDELINE - Plain Bearing Guide	71
POWERSLIDE - Roller Guide	73
PROLINE - Aluminium Roller Guide	77
HD - Heavy-duty Guide	79

Accessories

Motor Mounting	84
End Cap Mounting	91
Profile Mounting	94
Compensation	101
Guide Mounting	104
Magnetic Sensors	107
Measuring System - SFI-plus	110

Multi Axis Connections

Overview	113
Adapter Plate	115
Intermediate Drive Shaft	119

ORIGA SYSTEM PLUS

- One Concept
- Three Actuator Options

Based on the concept of the rodless pneumatic cylinder, well proven worldwide, Parker offers the complete solution for actuator systems. Developed for absolute reliability, high performance, easy handling and optimized design, ORIGA SYSTEM PLUS can master even the most difficult installation requirements.

ORIGA SYSTEM PLUS

A completely modular concept, enabling pneumatic and electric actuators to be combined with guides and control modules for all kinds of applications.

The main system carriers are the actuators themselves, consisting of extruded aluminium profiles with double dovetail slots on three sides, providing direct mounting for all modular options.



MODULAR SYSTEM

- **Electric Belt Actuator**

- For applications with higher speeds and precise movement and positioning for longer travel.

- 18 additional guide variants provide any required precision, performance and load capacity.

- **Electric Screw Actuator**

- For higher actuator power and precise movement and positioning.

- Compact solutions, easy to install and simple to retrofit.

- **Pneumatic Actuator**

- For a wide variety of applications with simple handling, combined with simple control possibilities and a broad power spectrum
- Ideal for fast, repetitive movements and simple positioning duties.

- Valves and control elements can be mounted directly on the pneumatic actuator.
- A wide range of mounting options provides great installation flexibility.

ORIGA SYSTEM PLUS

- One Concept
- Three Actuator Options

Basic Linear Drive Standard Version

- Series OSP-P*
- Series OSP-E Belt Drive
 - Belt Drive with Integrated Guides
 - Vertical Belt Drive with Recirculating Ball Bearing Guide
- Series OSP-E
 - Screw Drive (Ball Screw, Trapezoidal Screw)

**Air Connection on the End-face or Both at One End**

- Series OSP-P*

**Clean Room Cylinders certified to DIN EN ISO 146644-1**

- Series OSP-P*
- Series OSP-E..SB

**ATEX Certified Cylinders**

- Series OSP-P* Rodless Cylinder

**ATEX Certified Cylinders**

- Series OSP-P*
- Rodless Cylinders with Plain Bearing SLIDELINE

**Cylinders for Synchronised Counter-Rotation of the Cylinders**

- Series OSP-P*

**Integrated 3/2-Way Valves**

- Series OSP-P*

**Compensation**

- Series OSP-P*
- Series OSP-E Belt
- Series OSP-E Screw

**End Cap Mounting**

- Series OSP-P*
- Series OSP-E Belt
- Series OSP-E Screw

**Profile Mounting**

- Series OSP-P*
- Series OSP-E Belt
- Series OSP-E Screw

**Inversion Mounting**

- Series OSP-P*
- Series OSP-E Belt
- Series OSP-E Screw



* For more information on OSP-P series visit Parker.com/pde, or see catalogue PDE2690TCUK

Multi-Axis Systems Connecting Elements

- Adapter Plates
- Intermediate Drive Shafts

**Duplex-Connection**

- Series OSP-P*

**Multiplex-Connection**

- Series OSP-P*

**Linear Guides - SLIDELINE**

- Series OSP-P*
- Series OSP-E Screw

**Linear Guides - POWERSLIDE**

- Series OSP-P*
- Series OSP-E Belt
- Series OSP-E Screw

**Linear Guides - PROLINE**

- Series OSP-P*
- Series OSP-E Belt
- Series OSP-E Screw

**Linear Guides - STARLINE**

- Series OSP-P*

**Linear Guides - KF**

- Series OSP-P*

**Heavy Duty-Guides HD**

- Series OSP-P*
- Series OSP-E Screw

**Brakes**

- Active Brakes*
- Passive Brakes*

**Magnetic Sensor**

- Series OSP-P*
- Series OSP-E Belt
- Series OSP-E Screw

**SFI-plus Displacement Measuring Systems**

- Series OSP-P*
- Series OSP-E Screw



Actuators	OSP-E20 -BHD ¹⁾	OSP-E25 -BHD ^{1, 2)}	OSP-E32 -BHD ^{1, 2)}	OSP-E50 -BHD ^{1, 2)}	OSP-E20 -BV ³⁾	OSP-E25 -BV ³⁾	OSP-E25 -B ⁴⁾	OSP-E32 -B ⁴⁾	OSP-E50 -B ⁴⁾	OSP-E25 -SB ⁵⁾	OSP-E32 -SB ⁵⁾
Effective Action Force F _A [N]	450 - 550	550 - 1070	1030 - 1870	1940 - 3120	450 - 650	1050 - 1490	50	100 - 150	300 - 425	250	600
Max. Velocity v [m/s]	3.0	10.0 / 5	10.0 / 5	10.0 / 5	3.0	5.0	2.0	3.0	5.0	0.25	0.5
Integrated Magnets	□	□	□	□	-	-	□	□	□	□	□
Free Choice of Stroke Length [mm]**	1 - 5760	1 - 7000	1 - 7000	1 - 7000	1 - 1000	1 - 1500	1 - 3000	1 - 5000	1 - 5000	1 - 1100	1 - 2000
Temperature Range [°C]	-30 - +80	-30 - +80	-30 - +80	-30 - +80	-30 - +80	-30 - +80	-30 - +80	-30 - +80	-30 - +80	-20 - +80	-20 - +80
Tandem Version	O	O	O	O	O	O	O	O	O	O	O
Bi-parting Version	O	O	O	O	-	-	O	O	O		
Stainless Steel Parts	X	X	X	X	X	X	O	O	O	X	X
Integrated Planetary Gearbox LPB***	-	O	O	O	-	-	-	-	-	-	-
Self Guidance											
F [N]	1600	3000 / 986	10000 / 1348	15000 / 3704	1600	3000	160	300	850	500	1200
M _x [Nm]	21	50 / 11	120 / 19	180 / 87	20	50	2	8	16	2	8
M _y [Nm]	150	500 / 64	1000 / 115	1800 / 365	100	200	12	25	80	12	25
M _z [Nm]	150	500 / 64	1400 / 115	2500 / 365	100	200	8	16	32	8	16
Slideline											
F [N]	-	-	-	-	-	-	-	-	-	675	925
M _x [Nm]	-	-	-	-	-	-	-	-	-	14	29
M _y [Nm]	-	-	-	-	-	-	-	-	-	34	60
M _z [Nm]	-	-	-	-	-	-	-	-	-	34	60
Proline											
F [N]	-	-	-	-	-	-	986	1348	3582	986	1348
M _x [Nm]	-	-	-	-	-	-	19	33	128	19	33
M _y [Nm]	-	-	-	-	-	-	44	84	287	44	84
M _z [Nm]	-	-	-	-	-	-	44	84	287	44	84
Powerslide											
F [N]	-	-	-	-	-	-	910 - 1190	1400 - 2300	3000 - 4000	910-1190	1400-2300
M _x [Nm]	-	-	-	-	-	-	14 - 20	20 - 50	90 - 140	14-20	20-50
M _y [Nm]	-	-	-	-	-	-	63 - 175	70 - 175	250 - 350	63-175	70-175
M _z [Nm]	-	-	-	-	-	-	63 - 175	70 - 175	250 - 350	63-175	70-175
HD-Guide (Heavy Duty)											
F [N]	-	-	-	-	-	-	-	-	-	6000	6000
M _x [Nm]	-	-	-	-	-	-	-	-	-	260	285
M _y [Nm]	-	-	-	-	-	-	-	-	-	320	475
M _z [Nm]	-	-	-	-	-	-	-	-	-	320	475
Accessories											
Multi-Axis-System											
Connecting Elements	O	O	O	O	O	O	O	O	O	O	O
Connecting Shaft	O	O	O	O	O	O	O	O	O	O	O
Special Actuators											
Clean Room	X	X	X	X	X	X	X	X	X	O	O
Mountings											
Compensation	X	X	X	X	X	X	0	0	0	0	0
End Cap Mounting / Midsection Support	O	O	O	O	X	X	0	0	0	0	0
Inversion Mounting	X	X	X	X	X	X	0	0	0	0	0
Adapter Profile / T-Nut Profile	O	O	O	O	X	X	0	0	0	0	0
Magnetic Sensors											
Reeds Sensors RS (NO, NC)	O	O	O	O	O	O	O	O	O	O	O
Electronic Sensors ES (PNP, NPN)	O	O	O	O	O	O	O	O	O	O	O
Measuring Systems											
SFI-plus Displacement Measuring System	X	X	X	X	X	X	X	X	X	O	O
Gearbox											
Planetary Gears	O	O	O	O	O	O	O	O	O	O	O

□ = Standard Version

O = Option

X = Currently not available

* = Other Temperature Ranges on Request

** = exc. Safety Clearance from Mechanical End Position other Stroke Lengths on Request

*** = Ratio i = 3, 5, 10

1) = Actuator with Belt and Integrated Ball Bearing Guide

2) = Actuator with Belt and Integrated Roller Guide

3) = Vertical Actuator with Belt and Integrated Ball Bearing Guide

4) = Actuator with Belt and Internal Plain Bearing Guide

5) = Actuator with Ball Screw Actuator and Internal Plain Bearing Guide

6) = Actuator with Trapezoidal Screw Actuator and Internal Plain Bearing Guide

Actuators	OSP-E50 -SB ⁵⁾	OSP-E25 -ST ⁶⁾	OSP-E32 -ST ⁶⁾	OSP-E50 -ST ⁶⁾	OSP-E25 -SBR	OSP-E32 -SBR	OSP-E50 -SBR	OSP-E25 -STR	OSP-E32 -STR	OSP-E50 -STR
Effective Action Force F _A [N]	1500	600	1300	2500	260	900	1200	800	1600	3300
Max. Velocity v [m/s]	1.25	0.1	0.1	0.15	0.25	0.5	1.25	0.075	0.1	0.125
Integrated Magnets	□	□	□	□	□	□	□	□	□	□
Free Choice of Stroke Length [mm] **	1 - 3200	1 - 1100	1 - 2000	1 - 2500	1 - 500	1 - 500	1 - 500	1 - 500	1 - 500	1 - 500
Temperature Range [°C]	-20 - +80	-20 - +70	-20 - +70	-20 - +70	-20 - +80	-20 - +80	-20 - +80	-20 - +70	-20 - +70	-20 - +70
Tandem Version	O	O	O	O	-	-	-	-	-	-
Bi-parting Version										
Stainless Steel Parts	X	X	X	X	X	X	X	X	X	X
Integrated Planetary Gearbox LPB***	-	-	-	-	-	-	-	-	-	-
Self-Guidance										
F [N]	3000	500	1000	1500	-	-	-	-	-	-
M _x [Nm]	16	2	6	13	-	-	-	-	-	-
M _y [Nm]	80	24	65	155	-	-	-	-	-	-
M _z [Nm]	32	7	12	26	-	-	-	-	-	-
Slideline										
F [N]	2000	675	925	2000	-	-	-	-	-	-
M _x [Nm]	77	14	29	77	-	-	-	-	-	-
M _y [Nm]	180	34	60	180	-	-	-	-	-	-
M _z [Nm]	180	34	60	180	-	-	-	-	-	-
Proline										
F [N]	3582	986	1348	3582	-	-	-	-	-	-
M _x [Nm]	128	19	33	128	-	-	-	-	-	-
M _y [Nm]	287	44	84	287	-	-	-	-	-	-
M _z [Nm]	287	44	84	287	-	-	-	-	-	-
Powerslide										
F [N]	3000-4000	900-1190	1400-2300	3000-4000	-	-	-	-	-	-
M _x [Nm]	90-140	14-20	20-50	90-140	-	-	-	-	-	-
M _y [Nm]	250-350	63-175	70-175	250-350	-	-	-	-	-	-
M _z [Nm]	250-350	63-175	70-175	250-350	-	-	-	-	-	-
HD-Guide (Heavy Duty)										
F [N]	18000	6000	6000	18000	-	-	-	-	-	-
M _x [Nm]	1100	260	285	1100	-	-	-	-	-	-
M _y [Nm]	1400	320	475	1400	-	-	-	-	-	-
M _z [Nm]	1400	320	475	1400	-	-	-	-	-	-
Accessories										
Multi-Axis System										
Connecting Elements	O	O	O	O	O	O	O	O	O	O
Connecting Shaft	O	O	O	O	O	O	O	O	O	O
Special Actuators										
Clean Room	O	X	X	X	X	X	X	X	X	X
Mountings										
Compensation	O	O	O	O	-	-	-	-	-	-
End Cap Mounting / Midsection Support	O	O	O	O	O	O	O	O	O	O
Inversion Mounting	O	O	O	O	-	-	-	-	-	-
Adapter Profile / T-Nut Profile	O	O	O	O	O	O	O	O	O	O
Magnetic Sensors										
Reed Sensors RS (No. NC)	O	O	O	O	O	O	O	O	O	O
Electronic Sensors ES (PNP. NPN)	O	O	O	O	O	O	O	O	O	O
Measuring systems										
SFI-plus Displacement Measuring System	O	O	O	O	-	-	-	-	-	-
Gearbox										
Planetary Gears	O	O	O	O	O	O	O	O	O	O

□ = Standard vVersion

O = Option

X = Currently not available

* = Other Temperature Ranges on Request

** = exc. Safety Clearance from Mechanical End Position
Other Stroke Lengths on Request

*** = Ratio i = 3, 5, 10

1) = Actuator with Belt and Integrated Ball Bearing Guide

2) = Actuator with Belt and Integrated Roller Guide

3) = Vertical Actuator with Belt and Integrated Ball Bearing Guide

4) = Actuator with Belt and Internal Plain Bearing Guide

5) = Actuator with Ball Screw Actuator and Internal Plain Bearing Guide

6) = Actuator with Trapezoidal Screw Actuator and Internal Plain Bearing Guide

OSP-E: ONE Complete System – SEVEN actuator options for all possible applications

Series OSP-E..BHD

Belt Actuator with Integrated Guide

- Ball Bearing Guide
- Roller Guide



Series OSP-E..B

Belt Actuator with Internal Guide



Series OSP-E..SB

Ball Screw Actuator with Internal Plain Bearing Guide



Series OSP-E..SBR

Ball Screw Actuator with Internal Plain Bearing Guide and Piston Rod



Series OSP-E..BV

Vertical Belt Actuator with Integrated Ball Bearing Guide



Series OSP-E..ST

Trapezoidal Screw Actuator with Internal Plain Bearing Guide



Series OSP-E..STR

Trapezoidal Screw Actuator with Internal Plain Bearing Guide and Piston Rod



Description

Belt Actuator with Integrated Guide

**Belt-Actuators – Basic Versions**

Vertical Belt Actuator with Integrated Ball Bearing Guide




Belt Actuator with Internal Plain Bearing Guide



Standard Versions



- Direction of Motion
- Position of the Drive Shaft



- Position of the Drive Shaft

Options

- Tandem
- Bi-parting
- Integrated Planetary Gearbox

– Tandem

- Tandem
- Bi-parting
- Niro

Mountings

Compensation

–

–

O

End Cap Mounting

O

–

O

Profile Mounting

O

–

O

Inversion Mounting

–

–

O

Accessories

Magnetic Sensors

O

O

O

Motor Mountings

O

O

O

Linear Guides

–

–

O

Multi-Axis Connection System

O

O

O

Description**Screw-Actuators - Basic Versions**


Ball Screw Actuator with Internal Plain Bearing Guide




Trapezoidal Screw Actuator with Internal Plain Bearing Guide



Standard Versions



- Spindle pitch of the Ball Screws



Options

- Clean Room Version
- Displacement Measuring System SFI-plus

- Displacement Measuring System SFI-plus

Mountings

Compensation

O

O

End Cap Mounting

O

O

Profile Mounting

O

O

Inversion Mounting

O

O

Accessories

Magnetic Sensors

O

O

Motor Mounting

O

O

Flange Mounting

–

–

Trunnion Mounting

–

–

Piston Rod Knuckle

–

–

Linear Guide

O

O

Multi-Axis Connection System


O

O

Applications for OSP-E Actuators


Auto Handling

- high speed pick and place movements

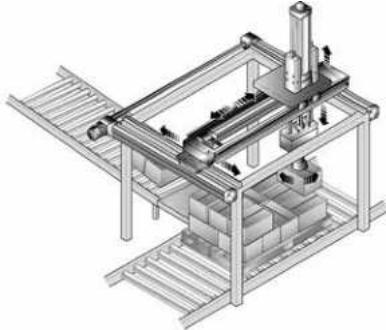


Material Handling Systems

- vertical and horizontal transfer movements

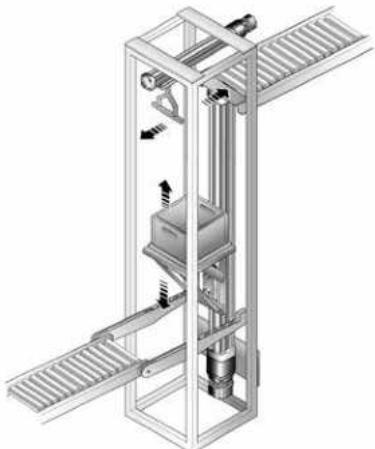


Punching Machines

- accurate feeding and positioning

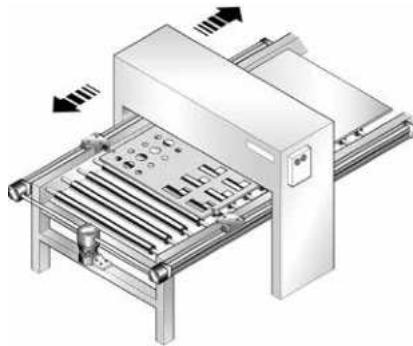


Mechanical Handling

- parallel operation of actuators on a vertical handling system

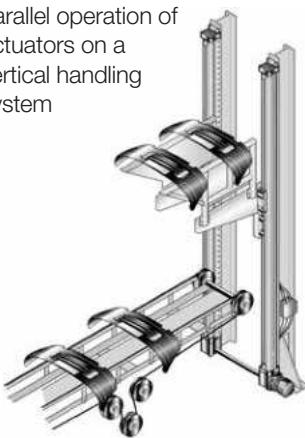

Profile Cutting Machines

- intricate profile movements of water jets and lasers

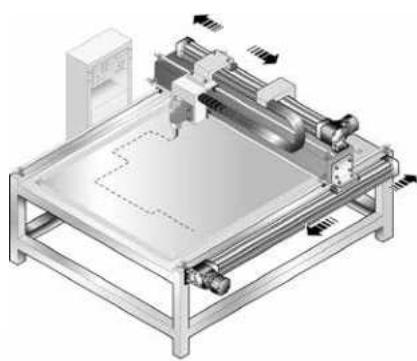


Slitting Machines

- high speed traverse applications for the slicing of papers and textiles




Spray Coating

- synchronized high speed bi-parting movements

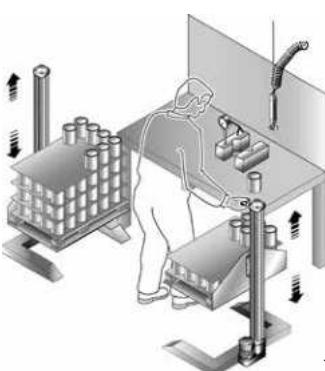

Automated Filling Machines

- accurate 3-axis positioning

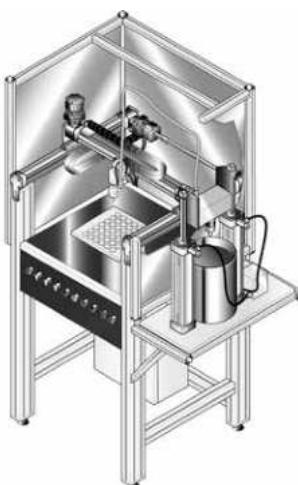

Automatic Doors and Guards

- simple bi-parting operation




Ergonomic Workstations

- adjustment of working levels

Applications for OSP-E Actuators


Robotic Installations

- traverse of robots between work stations

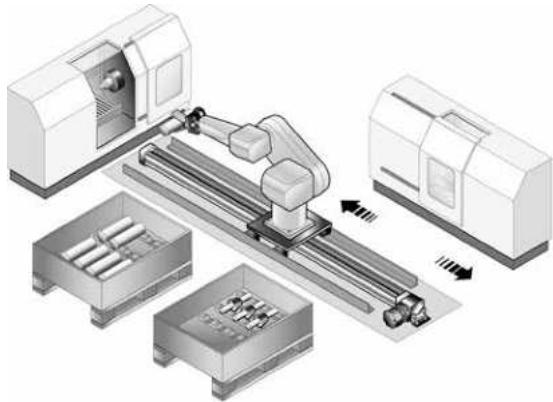


Milling Machines

- precise slow speed feeding in 2-axis

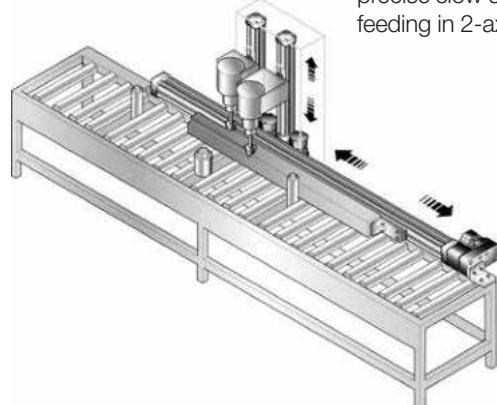


Spraying Equipment

- precision reciprocating action

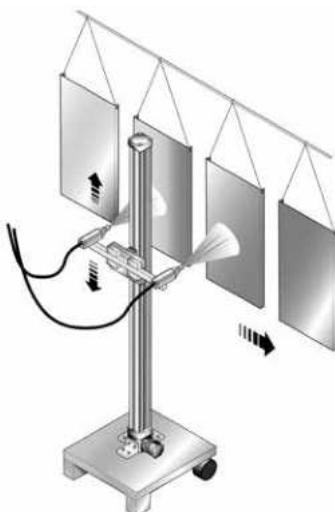


Conveyor Systems

- simple cross-transfer actuators

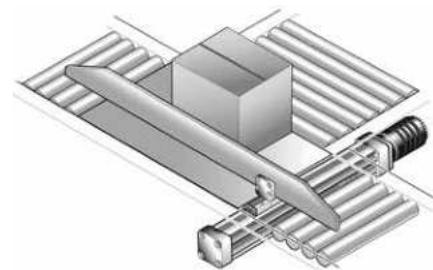


Measuring Systems

- optical curvature gauging using synchronised bi-parting actuation

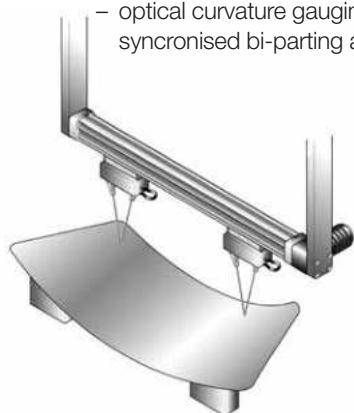

Conveyor Systems

- centring of packages on conveyor lines

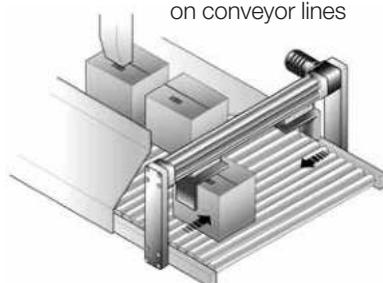

Mobile Lifting Systems

- lifting devices for industrial safety

Belt Actuator with Integrated Guide for Heavy Duty Applications

The latest generation of high capacity actuators, the OSP-E..BHD series combines robust engineering, precision and high performance. The aesthetic design is easily integrated into any machine constructions by virtue of extremely adaptable mountings.

Belt Actuator with Integrated Guide

- selective with Ball Bearing Guide or Roller Guide


Advantages:

- Accurate Path and Position Control
- High Force Output
- High Speed Operation
- High Load Capacity
- Easy Installation
- Low Maintenance
- Ideal for Multi-Axis Applications


Features:


- Integrated Ball Bearing Guide or Integrated Roller Guide
- Diverse Range of Multi-Axis Connection Elements
- Diverse Range of Accessories and Mountings
- Complete Motor and Control Packages
- Optional Integrated Planetary Gearbox
- Special Options on Request

Version with Intergrated Ball Bearing Guide

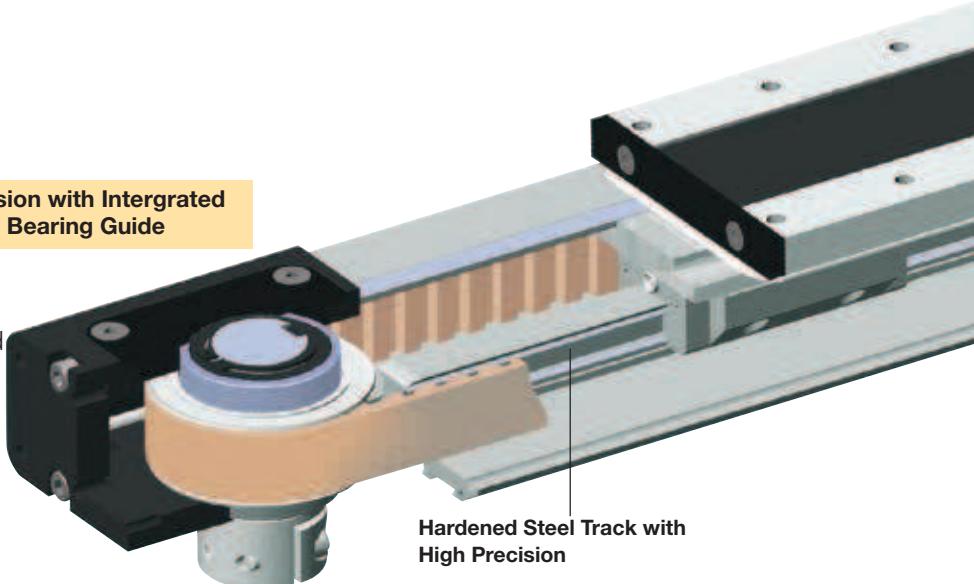

Version with Integrated Roller Guide

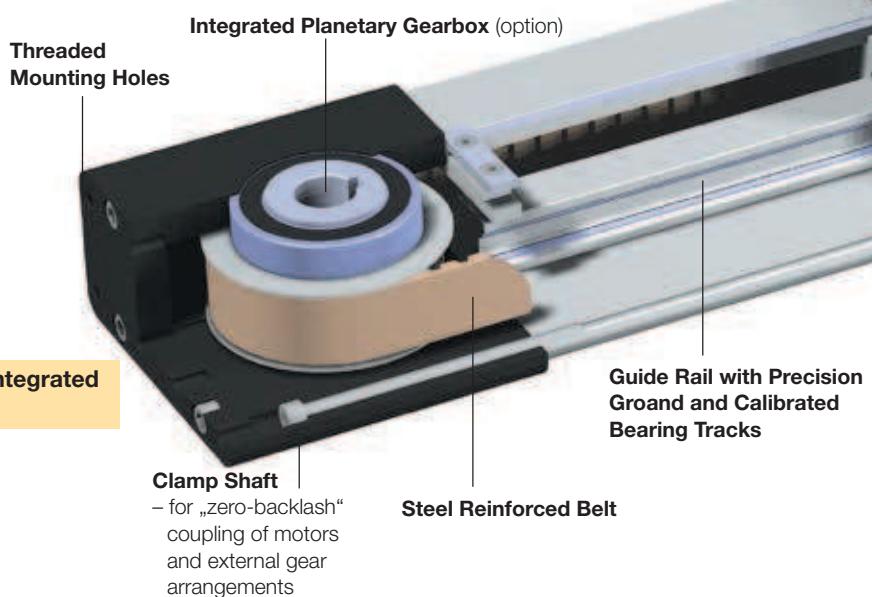

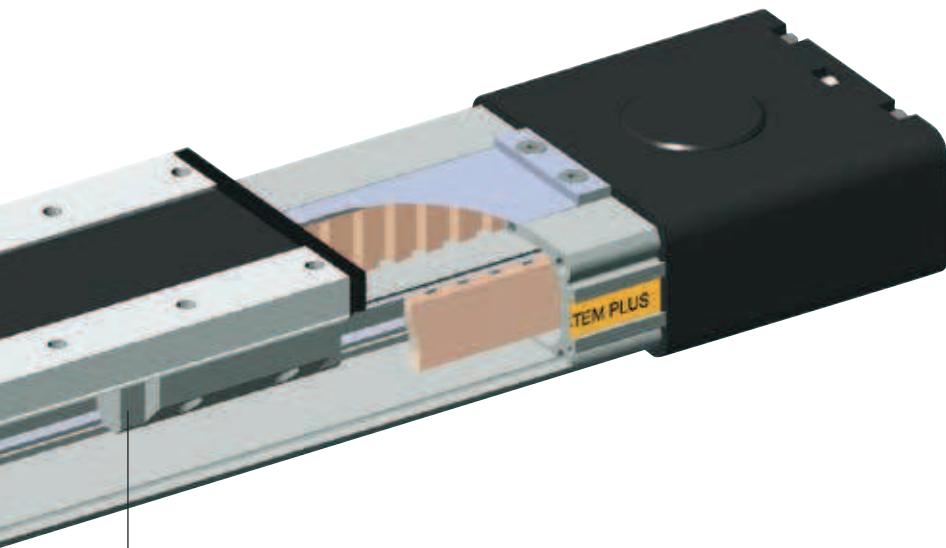Drive Shaft Versions**Steel Runner Block with Integrated Scraper System and Grease Nipples**

Threaded Mounting Holes Compatible with Proline Series

Carriage**Corrosion Resistant Steel Sealing Band**

Slotted Profile with Dovetail Grooves

MULTI-AXIS SYSTEMS

A wide range of adapter plates and intermediate drive shafts simplify engineering and installation

Rollers on Needle Bearings for Smooth Operation up to 10 m/s.

BI-PARTING Version


for perfectly synchronised bi-parting movements.

**Drive Shaft Options****Option**
- Integrated Planetary Gearbox

- Highly compact and rigid solution fully integrated in the drive cap housing
- Purpose designed for the BHD series
- Available with three standard ratios (3, 5 and 10)
- Very low backlash
- A wide range of available motor flanges

The dovetailed mounting rails of the new linear actuator expand its function into that of a universal system carrier.

Modular system components are simply clamped on.

Version with Integrated Ball Bearing Guide

OSP-E..BHD Belt Actuator with Integrated Guide

STANDARD VERSIONS

OSP-E..BHD

Standard carrier with integrated guide and magnets for contactless position sensing. Dovetail profile for mounting of accessories and the actuator itself.



DRIVE SHAFT WITH CLAMP SHAFT




DRIVE SHAFT WITH PLAIN SHAFT



ACTUATING DIRECTION

Important in parallel operations, e.g. with intermediate drive shaft



Standard

Standard -
bi-parting
Version

OPTIONS

Tandem

For higher moment support



ACCESSORIES

Motor Mountings



BI-PARTING VERSION

For perfectly synchronised bi-parting movements.



END CAP MOUNTING

For mounting the actuators on the end cap.



DRIVE SHAFT WITH CLAMP

AND PLAIN SHAFT

For connections with intermediate drive shaft



HOLLOW SHAFT WITH KEYWAY

For close coupling of motors and external gears



INTEGRATED PLANETARY

GEARBOX

For compact installation and very low backlash



PROFILE MOUNTING

For supporting long actuators or mounting the actuators on dovetail grooves



MAGNETIC SENSORS


TYPE RS / ES

For contactless position sensing of end stop and intermediate carrier positions.



MULTI-AXIS-SYSTEMS

For modular assembly of actuators up to multi-axis systems.

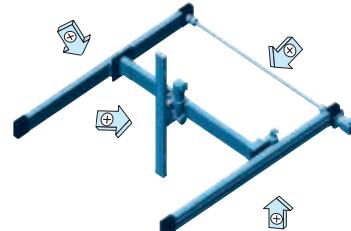

OSP-E..BHD

Belt Actuator with Integrated Ball Bearing Guide



Size 20 to 50



Standard Versions

- Belt Actuator with Integrated Ball Bearing Guide
- Drive Shaft with Clamp Shaft or Plain Shaft
- Choice of Motor Mounting Side
- Dovetail Profile for Mounting of Accessories and the Actuator itself

Options

- Tandem Version for Higher Moments
- Bi-parting Version for Synchronised Movements
- Integrated Planetary Gearbox
- Drive Shaft with
 - Clamp Shaft and Plain Shaft
 - Hollow Shaft with Keyway
- Special Drive Shaft Versions on Request

Characteristics

	Symbol	Unit	Description
General Features			
Series			OSP-E..BHD
Name			Belt Acutator with Integrated Ball Bearing Gear
Mounting			see drawings
Ambient Temperature Range	ϑ_{\min} ϑ_{\max}	°C	-30 +80
Installation			in any position
Slotted profile			Extruded Anodized Aluminium
Belt			Steel-corded Polyurethane
Pulley			Aluminium
Guide			Ball Bearing Guide
Material	Guide Rail		Hardened Steel Rail with High Precision, Accuracy Class N
Guide Carrier			Steel Carrier with Integrated Wiper System, Grease Nipples, Preloaded 0.02 x C, Accuracy Class H
Sealing Band			Hardened, Corrision Resistant Steel
Screws, Nuts			Zinc Plated Steel
Mountings			Zinc Plated Steel and Aluminium
Protection Class	IP		54

Weight (mass) and Inertia

Series	Weight (mass) [kg]			Inertia [x 10 ⁻⁶ kgm ²]		
	at stroke 0 m	add per metre stroke	moving mass	at stroke 0 m	add per metre stroke	per kg mass
OSP-E20BHD	2.8	4.0	0.8	280	41	413
OSP-E25BHD	4.3	4.5	1.5	1.229	227	821
OSP-E32BHD	8.8	7.8	2.6	3.945	496	1459
OSP-E50BHD	26.0	17.0	7.8	25.678	1.738	3.103
OSP-E20BHD*	4.3	4.0	1.5	540	41	413
OSP-E25BHD*	6.7	4.5	2.8	2.353	227	821
OSP-E32BHD*	13.5	7.8	5.2	7.733	496	1.459
OSP-E50BHD*	40.0	17.0	15.0	49.180	1.738	3.103

*Version: Tandem and Bi-parting (Option)

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the actuator as a machine into service, the user must ensure the adherence to the EC Machine Directive 2006/42/EG.

Maintenance

Depending on operating conditions, inspection of the actuator is recommended after 12 months or 8000 km operation. Please refer to the operating instructions supplied with the actuator.

Installations Instructions

Use the threaded holes in the end cap for mounting the actuator. Check if profile mountings are needed using the maximum allowable unsupported length graph on page 17.

At least one end cap must be secured to prevent axial sliding when profile mountings are used.

Sizing, Performance Overview, Maximum Loadings

Sizing of Actuator

The following steps are recommended:

1. Determination of the lever arm length l_x , l_y and l_z from m_e to the centre axis of the actuator.

2. Calculation of the load F_x or F_y to the carrier caused by m_e

$$F = m_e \cdot g$$

3. Calculation of the static and dynamic force F_A which must be transmitted by the belt.

$$F_{A(\text{horizontal})} = F_a + F_0 \\ = m_g \cdot a + M_0 \cdot 2\pi / U_{ZR}$$

$$F_{A(\text{vertical})} = F_g + F_a + F_0 \\ = m_g \cdot g + m_g \cdot a + M_0 \cdot 2\pi / U_{ZR}$$

4. Calculation of all static and dynamic moments M_x , M_y and M_z which occur in the application.

$$M = F \cdot I$$

5. Selection of maximum permissible loads via Table T3.

6. Calculation and checking of the combined load, which must not be higher than 1.

7. Checking of the maximum torque that occurs at the drive shaft in Table T2.

8. Checking of the required action force F_A with the permissible load value from Table T1.

For motor sizing, the effective torque must be determined, taking into account the cycle time.

Performance Overview

Characteristics	Unit	Description												
Series		OSP-E20BHD	OSP-E25BHD	OSP-E32BHD	OSP-E50BHD									
Max. Speed	[m/s]	2 ¹⁾	5 ¹⁾	5 ¹⁾	5 ¹⁾									
Linear Motion per Revolution of Drive Shaft	[mm]	125	180	240	350									
Max. rpm on Drive Shaft	[min ⁻¹]	2,000	1,700	1,250	860									
Max. Effective Action Force F_A at Speed	<table border="1"> <tr> <td>< 1 m/s:</td> <td>[N]</td> <td>550</td> </tr> <tr> <td>1-3 m/s:</td> <td>[N]</td> <td>450</td> </tr> <tr> <td>> 3 m/s:</td> <td>[N]</td> <td>–</td> </tr> </table>	< 1 m/s:	[N]	550	1-3 m/s:	[N]	450	> 3 m/s:	[N]	–	550	1,070	1,870	3,120
< 1 m/s:	[N]	550												
1-3 m/s:	[N]	450												
> 3 m/s:	[N]	–												
No-load Torque	[Nm]	0.6	1.2	2.2	3.2									
Max. Acceleration/Deceleration	[m/s ²]	50	50	50	50									
Repeatability	[mm/m]	±0.05	±0.05	±0.05	±0.05									
Max. Standard Stroke Length	[mm]	5,760 ²⁾	5,700 ²⁾	5,600 ²⁾	5,500 ²⁾									

¹⁾ up to 10 m/s on request

²⁾ longer strokes on request

T1

Maximum Permissible Torque on Drive Shaft Speed / Stroke

OSP-E20BHD				OSP-E25BHD				OSP-E32BHD				OSP-E50BHD			
Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]
1	11	1	11	1	31	1	31	1	71	1	71	1	174	1	174
2	10	2	11	2	28	2	31	2	65	2	71	2	159	2	174
3	9	3	8	3	25	3	31	3	59	3	60	3	153	3	138
4		4	7	4	23	4	25	4	56	4	47	4	143	4	108
5		5	5	5	22	5	21	5	52	5	38	5	135	5	89

T2

Important:

The maximum permissible torque on the drive shaft is the lowest value of the speed- or stroke-dependent torque value.

Example above:

OSP-E25BHD, stroke 5 m, required speed 3 m/s from table T2 speed 3 m/s gives 25 Nm and stroke 5 m gives 21 Nm. Max. torque for this application is 21 Nm.

Maximum Permissible Loads

Series	Max. Applied Load			Max. Moments [Nm]		
	F_y [N]	F_z [N]	M_x	M_y	M_z	
OSP-E20BHD	1,600	1,600	21	150	150	
OSP-E25BHD	2,000	3,000	50	500	500	
OSP-E32BHD	5000	10,000	120	1,000	1,400	
OSP-E50BHD	12,000	15,000	180	1,800	2,500	

T3

Legend

l = distance of a mass in the x-, y- and z-direction from the guide [m]

m_e = external moved mass [kg]

m_{LA} = moved mass of actuator [kg]

m_g = total moved mass ($m_e + m_{LA}$) [kg]

F_{xy} = load exerted on the carrier in dependence of the installation position [N]

F_A = action force [N]

M_0 = no-load torque [Nm]

U_{ZR} = circumference of the pulley (linear movement per revolution) [m]


g = gravity [m/s²]

$a_{\text{max.}}$ = maximum acceleration [m/s²]

Loads, Forces and Moments

Combined Loads

If the actuator is subjected to several forces, loads and moments at the same time, the maximum load is calculated with the equation shown here. The maximum permissible loads must not be exceeded.

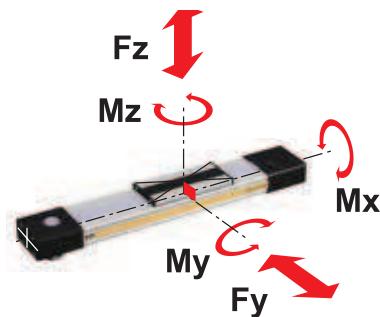

Maximum Permissible Unsupported Length

Stroke Length

The stroke lengths of the actuators are available in multiples of 1 mm up to 5,700 mm.

Other stroke lengths are available on request.

The end of stroke must not be used as a mechanical stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft but at least 100 mm.

The use of an AC motor with frequency converter normally requires a larger clearance than that required for servo systems.

For advice, please contact your local Parker technical support department.

* For Bi-parting version the max. load (F) is the total load of both carriers

$$F = F_{\text{carrier 1}} + F_{\text{carrier 2}}$$

k = Max. permissible distance between mountings/Profile Mounting for a given load F .

When loadings are below or up to the curve in the graph below the deflection will be max. 0.01 % of distance k .

Equation of Combined Loads

$$\frac{F_y}{F_y(\text{max})} + \frac{F_z}{F_z(\text{max})} + \frac{M_x}{M_x(\text{max})} + \frac{M_y}{M_y(\text{max})} + \frac{M_z}{M_z(\text{max})} \leq 1$$

The total of the loads must not exceed >1 under any circumstances.

$$M = F \cdot l \text{ [Nm]}$$




$$M_x = M_x \text{ static} + M_x \text{ dynamic}$$

$$M_y = M_y \text{ static} + M_y \text{ dynamic}$$

$$M_z = M_z \text{ static} + M_z \text{ dynamic}$$

The distance (l_x , l_y , l_z) for calculation of moments relates to the centre axis of the actuator. Bending moments are calculated from the centre of the actuator and F indicates actual force.

Maximum Permissible Unsupported Length – Placing of Profile Mounting

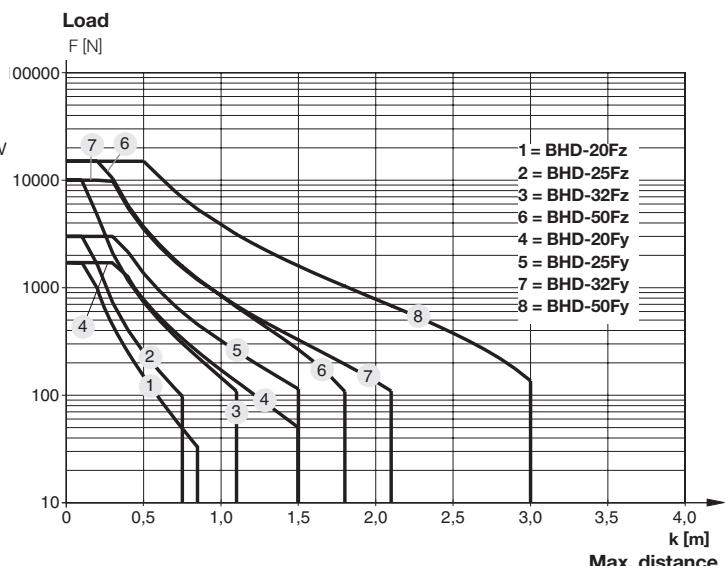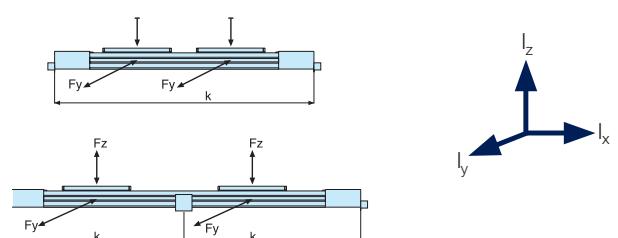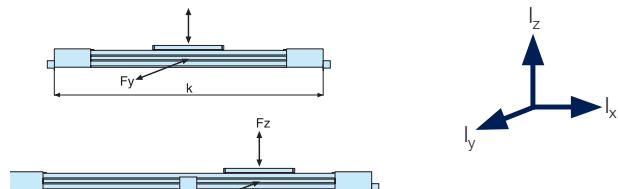





OSP-E..BHD

Linear Drive with Toothed Belt and Integrated Recirculating Ball Bearing Guide


Basic Unit

Drive shaft versions with

- clamp shaft
- plain shaft or
- clamp shaft with plain shaft (Option)

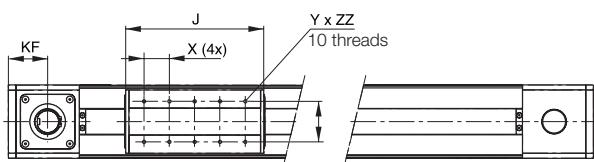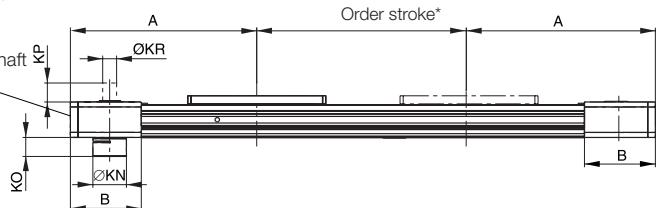


Mounting holes for motor flange or external planetary gearbox 1)



¹⁾ Note: The mounting holes for the coupling housing / motor flange / gearbox are located on the opposite side to the carrier (motor mounting standard). They also can be located on the same side as the carrier (motor mounting 180° standard).

Hollow shaft with Keyway (Option)




Dimension Table [mm]

Series	KB*	KC	KL	KT	KU x KJ
OSP-E20BHD	12 ^{H7}	13.8	4	65.7	M6 x 8
OSP-E25BHD	16 ^{H7}	18.3	5	82	M8 x 8
OSP-E32BHD	22 ^{H7}	24.8	6	106	M10 x 12
OSP-E50BHD	32 ^{H7}	35.3	10	144	M12 x 19


* Note: The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 100 mm. Order stroke = required travel + 2 x safety distance. The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems. For further information please contact your local Parker representative.

Option Tandem - Series OSP-E.. BHD



** Order stroke = required travel + KM min + 2 x safety distance

Option - Bi-Parting - Series OSP-E.. BHD



*** Order stroke = 2 x required travel + KM min + 2 x safety distance

Dimension Table [mm]

Series	A	B	C	E	GxH	J	K	M	S	V	X	YxZZ	CE	CF	EC	EF	FB
OSP-E20BHD	185	76.5	73	18	M5x8.5	155	21.1	27.6	67	51	30	M5x8	38	49.0	60	27	73
OSP-E25BHD	218	88.0	93	25	M5x10	178	21.5	31.0	85	64	40	M6x8	42	52.5	79	27	92
OSP-E32BHD	262	112	116	28	M6x12	218	28.5	38.0	100	64	40	M6x10	56	66.5	100	36	116
OSP-E50BHD	347	147	175	18	M6x12	288	43.0	49.0	124	90	60	M6x10	87	92.5	158	70	164

Series	FH	KF	KM _{min}	KM _{empf.}	KN	KO	KP	KR	KS	KT	KUxKJ
OSP-E20BHD	36.0	42.5	180	220	27	18.0	25	12 _{h7}	12 ^{H7}	65.7	M6x8
OSP-E25BHD	39.5	49.0	210	250	34	21.7	30	16 _{h7}	16 ^{H7}	82.0	M8x8
OSP-E32BHD	51.7	62.0	250	300	53	30.0	30	22 _{h7}	22 ^{H7}	106.0	M10x12
OSP-E50BHD	77.0	79.5	354	400	75	41.0	35	32 _{h7}	32 ^{H7}	144.0	M12x19

(Other dimensions for KS and KB for special drive shafts on request – see order instructions.)

Integrated Planetary Gearbox Series OSP-E..BHD

Standard Version:

- Gearbox on Opposite Side to Carrier

Note:


When ordering, specify model / type of motor and manufacturer for correct motor flange.

Please contact your local Parker technical support for available motor flange.

Features

- Highly Compact and Rigid Solution Fully Integrated in the Drive Cap Housing
- Purpose Designed for the BHD Series.
- Available with three Standard Ratios (3, 5 and 10)
- Very Low Backlash
- Wide Range of Available Motor Flanges


Material: Aluminium (AL-H) / Steel (St-H)

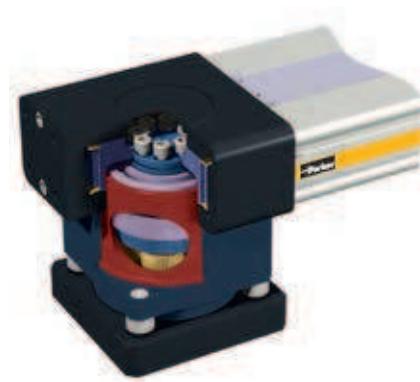

Performance Overview

Characteristics	Symbol	Unit	Description		
Series			OSP-E25BHD	OSP-E32BHD	OSP-E50BHD
Ratio (1-stage)	i		3/5/10		
Max. Axial Load	F _a max	[N]	1,550	1,900	4,000
Torsional Rigidity (i=5)	C _{t,21}	[Nm/arcmin]	3.3	9.5	25.0
Torsional Rigidity (i=3/10)	C _{t,21}	[Nm/arcmin]	2.8	7.5	22.0
Torsional Backlash	J _t	[arcmin]		<12	
Linear Motion per Revolution of Drive Shaft		[mm]	220	280	360
Nominal Input Speed	n _{nom}	[min ⁻¹]	3,700	3,400	2,600
Max. Input Speed	n _{1max}	[min ⁻¹]		6,000	
No-load Torque at Nominal Input Speed	T ₀₁₂	[Nm]	<0.14	<0.51	<1.50
Lifetime		[h]		20,000	
Efficiency	η	[%]		>97	
Noise Level (n ₁ =3000 min ⁻¹)	L _{PA}	[db]	<70	<72	<74

Dimensions

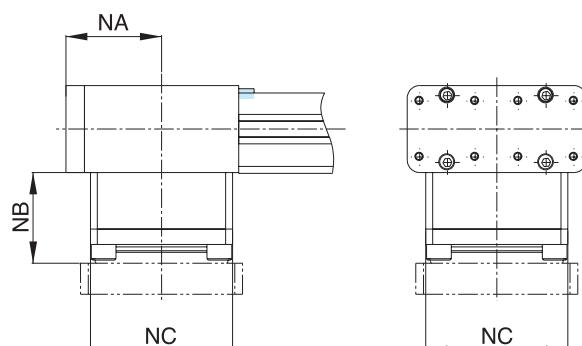

Dimension Table [mm] and additional weight

Series	NA	NB	NC	Weight (mass) [kg]
OSP-E25BHD	49	43	76	2.6
OSP-E32BHD	62	47	92	4.9
OSP-E50BHD	80	50	121	9.6

OSP-E...BHD Belt Actuator with Integrated Roller Guide

Size 25, 32, 50

Standard Versions

- Belt Acuator with Integrated Roller Guide
- Drive Shaft with Clamp Shaft or Plain Shaft
- Choice of Motor Mounting Side
- Dovetail Profile for Mounting of Accessories and the Actuator Itself



Options

- Tandem Version for Higher Moments
- Bi-parting Version for Synchronised Movements
- Integrated Planetary Gearbox
- Drive shaft with
 - clamp shaft and plain shaft
 - hollow shaft with keyway
- Special Drive Shaft Versions on Request

Characteristics

	Symbol	Unit	Description
General Features			
Series			OSP-E..BHD
Name			Linear Drive with Toothed Belt and Integrated Roller Guide
Mounting			see drawings
Ambient Temperature Range	ϑ_{\min} ϑ_{\max}	°C	-30 +80
Installation			in any position
Slotted Profile			Extruded Anodized Aluminium
Toothed Belt			Steel-corded Polyurethane
Pulley			Aluminium
Guide			Roller Guide
Guide Rail			Aluminium
Material	Track		High Alloyed Steel
Roller Cartige			Steel rollers in Aluminium Housing
Sealing Band			Hardened, Corrision Resistant Steel
Screws, Nuts			Zinc Plated Steel
Mountings			Zinc Plated Steel and Aluminium
Protection Class	IP		54

Installation Instructions

Use the threaded holes in the end cap for mounting the actuator. Check if profile mountings are needed using the maximum allowable unsupported length graph on page 22. At least one end cap must be secured to prevent axial sliding when profile mountings are used.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the acutator as a machine into service, the user must ensure the adherence to the EC Machine Directive 2006/42/EG.

Maintenance

Depending on operating conditions, inspection of the actuator is recommended after 12 months or 8000 km operation. Please refer to the operating instructions supplied with the actuator.

Weight (mass) and Inertia

Series	Weight (mass) [kg]			Inertia [$\times 10^{-6}$ kgm 2]		
	at stroke 0 m	ad per metre stroke	Moving mass	at stroke 0 m	ad per metre stroke	Moving mass
OSP-E25BHD	3.8	4.3	1.0	984	197	821
OSP-E32BHD	7.7	6.7	1.9	3.498	438	1.459
OSP-E50BHD	22.6	15.2	4.7	19.690	1.489	3.103
OSP-E25BHD*	5.7	4.3	2.0	1.805	197	821
OSP-E32BHD*	11.3	6.7	3.8	6.358	438	1.459
OSP-E50BHD*	31.7	15.2	9.4	34.274	1.489	3.103

* Version: Tandem and Bi-parting (Option)

Sizing, Performance Overview, Maximum Loadings

Performance Overview

Characteristics	Symbol	Description		
Series		OSP-E25BHD	OSP-E32BHD	OSP-E50BHD
Max. Speed	[m/s]	10	10	10
Linear Motion per Revolution Drive Shaft	[m/s]	180	240	350
Max. rpm. Drive Shaft	[min ⁻¹]	3,000	2,500	1,700
Max. Effective Action Force F_A at Speed	$\begin{array}{l} < 1 \text{ m/s:} \\ 1-3 \text{ m/s:} \\ > 3-10 \text{ m/s:} \end{array}$ [N]	$\begin{array}{l} 1,070 \\ 890 \\ 550 \end{array}$	$\begin{array}{l} 1,870 \\ 1,560 \\ 1,030 \end{array}$	$\begin{array}{l} 3,120 \\ 2,660 \\ 1,940 \end{array}$
No-load Torque	[Nm]	1.2	2.2	3.2
Max. Acceleration/Deceleration	[m/s ²]	40	40	40
Repeatability	[mm/m]	± 0.05	± 0.05	± 0.05
Max. Standard Stroke Length	[mm]	7,000	7,000	7,000

Sizing of Actuator

The following steps are recommended:

1. Determination of the lever arm length l_x , l_y and l_z from m_e to the centre axis of the actuator.

2. Calculation of the load F_x or F_y to the carrier caused by m_e

$$F = m_e \cdot g$$

3. Calculation of the static and dynamic force F_A which must be transmitted by the belt.

$$\begin{aligned} F_{A(\text{horizontal})} &= F_a + F_0 \\ &= m_g \cdot a + M_0 \cdot 2\pi / U_{ZR} \end{aligned}$$

$$\begin{aligned} F_{A(\text{vertical})} &= F_g + F_a + F_0 \\ &= m_g \cdot g + m_g \cdot a + M_0 \cdot 2\pi / U_{ZR} \end{aligned}$$

4. Calculation of all static and dynamic bending moments M_x , M_y and M_z which occur in the application
 $M = F \cdot l$

5. Selection of maximum permissible loads via Table T3.

6. Calculation and checking of the combined load, which must not be higher than 1.

7. Checking of the maximum torque that occurs at the drive shaft in Table T2.

8. Checking of the required action force F_A with the permissible load value from Table T1.

For motor sizing, the effective torque must be determined, taking into account the cycle time.

Maximum Permissible Torque on Drive Shaft Speed and Stroke

OSP-E25BHD				OSP-E32BHD				OSP-E50BHD			
Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]
1	31	1	31	1	71	1	71	1	174	1	174
2	28	2	31	2	65	2	71	2	159	2	174
3	(25)	3	31	3	59	3	60	3	153	3	138
4	23	4	25	4	56	4	47	4	143	4	108
5	22	5	(21)	5	52	5	38	5	135	5	89
6	21	6	17	6	50	6	32	6	132	6	76
7	19	7	15	7	47	7	28	7	126	7	66
8	18			8	46			8	120		
9	17			9	44			9	116		
10	16			10	39			10	108		

Important:

The maximum permissible torque on the drive shaft is the lowest value of the speed- or stroke-dependent torque value.

Example above:

OSP-E25BHD, stroke 5 m, required speed 3 m/s from table T2 speed 3 m/s gives 25 Nm and stroke 5 m gives 21 Nm. Max. torque for this application is 21 Nm.

Maximum Permissible Loads

Series	Max. applied load F_y, F_z [N]	Max. moments [Nm]		
		M_x	M_y	M_z
OSP-E25BHD	986	11	64	64
OSP-E32BHD	1,348	19	115	115
OSP-E50BHD	3,704	87	365	365

Legend

- l = distance of a mass in the x-, y- and z-direction from the guide [m]
- m_e = external moved mass [kg]
- m_{LA} = moved mass of actuator [kg]
- m_g = total moved mass ($m_e + m_{LA}$) [kg]
- $F_{x/y}$ = load exerted on the carrier in dependence of the installation position [N]

- F_A = action force [N]
- M_0 = no-load torque [Nm]
- U_{ZR} = circumference of the pulley (linear movement per revolution) [m]
- g = gravity [m/s²]
- a_{\max} = maximum acceleration [m/s²]

Loads, Forces and Moments

Combined Loads

If the actuator is subjected to several forces, loads and moments at the same time, the maximum load is calculated with the equation shown here. The maximum permissible loads must not be exceeded.

Equation of Combined Loads

$$\frac{F_y}{F_y(\text{max})} + \frac{F_z}{F_z(\text{max})} + \frac{M_x}{M_x(\text{max})} + \frac{M_y}{M_y(\text{max})} + \frac{M_z}{M_z(\text{max})} \leq 1$$

The total of the loads must not exceed >1 under any circumstances.

Maximum Permissible Unsupported Length

Stroke length

The stroke lengths of the actuators are available in multiples of 1 mm up to 5,700 mm.

Other stroke lengths are available on request.

The end of stroke must not be used as a mechanical stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 100 mm.

The use of an AC motor with frequency converter normally requires a larger clearance than that required for servo systems.

For advice, please contact your local Parker technical support department.


* For the bi-parting version the maximum load (F) complies with the total of the load at both carriers.

$$F = F_{\text{carriage 1}} + F_{\text{carriage 2}}$$

k = Maximum permissible distance between mountings/mid-section support for a given load F.

If the loads are below or up to the curve in the graph the deflection will be max. 0.01 % of distance k.



Loads, Forces and Moments

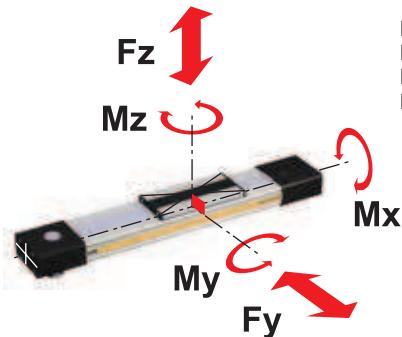

$$\begin{aligned} M &= F \cdot l \text{ [Nm]} \\ M_x &= M_{x \text{ static}} + M_{x \text{ dynamic}} \\ M_y &= M_{y \text{ static}} + M_{y \text{ dynamic}} \\ M_z &= M_{z \text{ static}} + M_{z \text{ dynamic}} \end{aligned}$$

The distance (l_x, l_y, l_z) for calculation of moments relates to the centre axis of the actuator. Bending moments are calculated from the centre of the actuator and F indicates actual force.

Maximum Permissible Unsupported Length – Placing of Profile Mounting

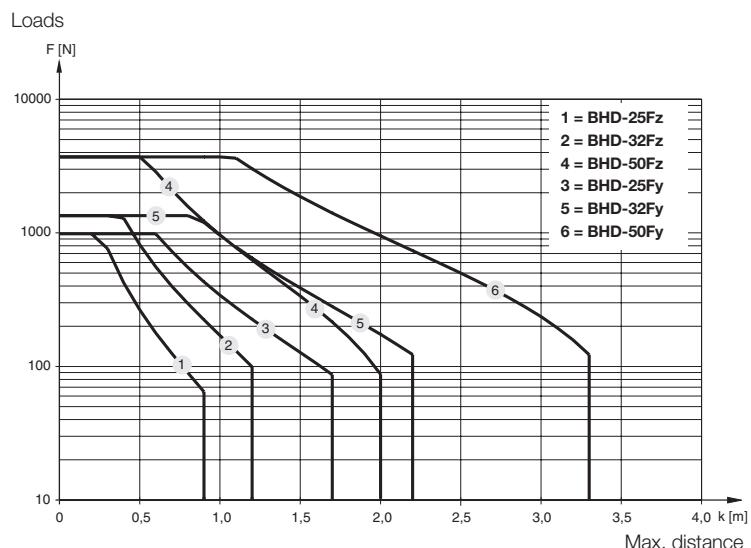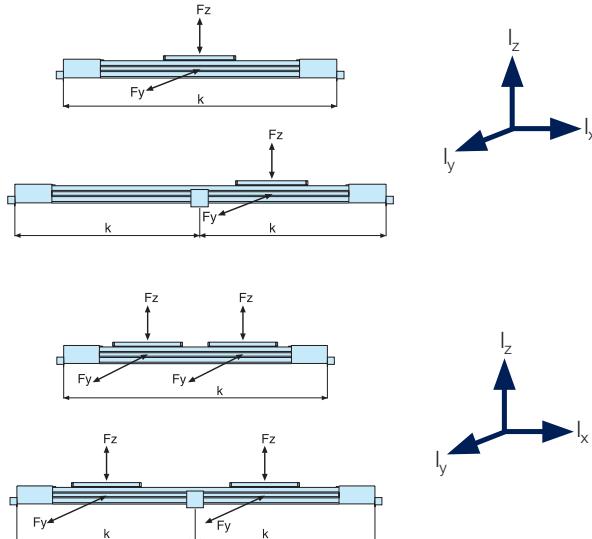


Linear Drive with Toothed Belt and Integrated Roller Guide

Basic Unit OSP-E..BHD

Drive Shaft versions with


- clamp shaft
- plain shaft or
- clamp shaft with plain shaft (Option)

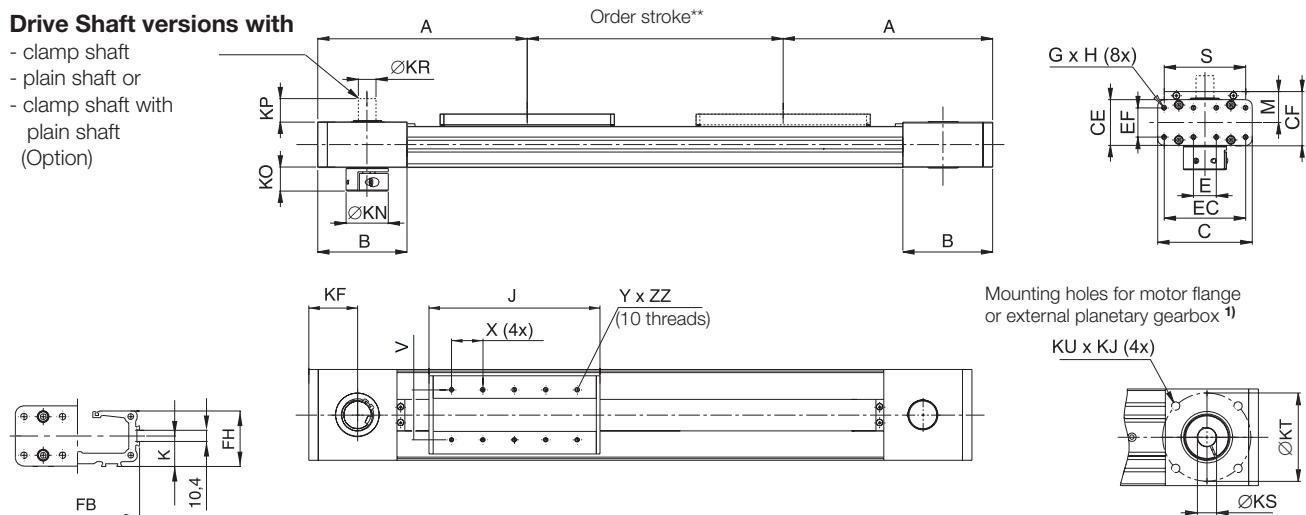

Hollow Shaft with Keyway (Option)

Dimension [mm]

Series	KB*	KC	KL	KT	KU x KJ
OSP-E25BHD	16 ^{H7}	18.3	5	82	M8 x 8
OSP-E25BHD	22 ^{H7}	24.8	6	106	M10 x 12
OSP-E50BHD	32 ^{H7}	35.3	10	144	M12 x 19

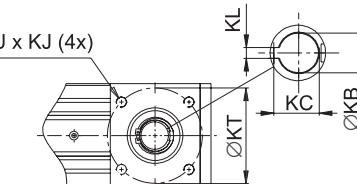


¹⁾ Note: The mounting holes for the coupling housing / motor flange / gearbox are located on the opposite side to the carrier (motor mounting standard). They also can be located on the same side as the carrier (motor mounting 180° standard).

* Note: The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 100 mm. Order stroke = required travel + 2 x safety distance.


The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems. For further information please contact your local Parker representative.

Option Tandem



** Order stroke = required travel + KM min + 2 x safety distance

Option - Bi-Parting




*** Order stroke = 2 x required travel + KM min + 2 x safety distance

Dimension Table [mm]

Series	A	B	C	E	GxH	J	K	M	S	V	X	YxZZ	CE	CF
OSP-E25BHD	218	88.0	93	25	M5x10	178	21.5	31.0	85	64	40	M6x8	42	52.5
OSP-E32BHD	262	112	116	28	M6x12	218	28.5	38.0	100	64	40	M6x10	56	66.5
OSP-E50BHD	347	147	175	18	M6x12	263	43.0	49.0	124	90	60	M6x10	87	92.5

Series	EC	EF	FB	FH	KF	KM _{min}	KM _{empf.}	KN	KO	KP	KR	KS	KT	KUxKJ
OSP-E25BHD	79	27	92	39.5	49.0	210	250	34	21.7	30	16 _{h7}	16 ^{H7}	82.0	M8x8
OSP-E32BHD	100	36	116	51.7	62.0	250	300	53	30.0	30	22 _{h7}	22 ^{H7}	106.0	M10x12
OSP-E50BHD	158	70	164	77.0	79.5	295	350	75	41.0	35	32 _{h7}	32 ^{H7}	144.0	M12x19

Other dimensions for KS and KB for special drive shafts on request - see other instructions.

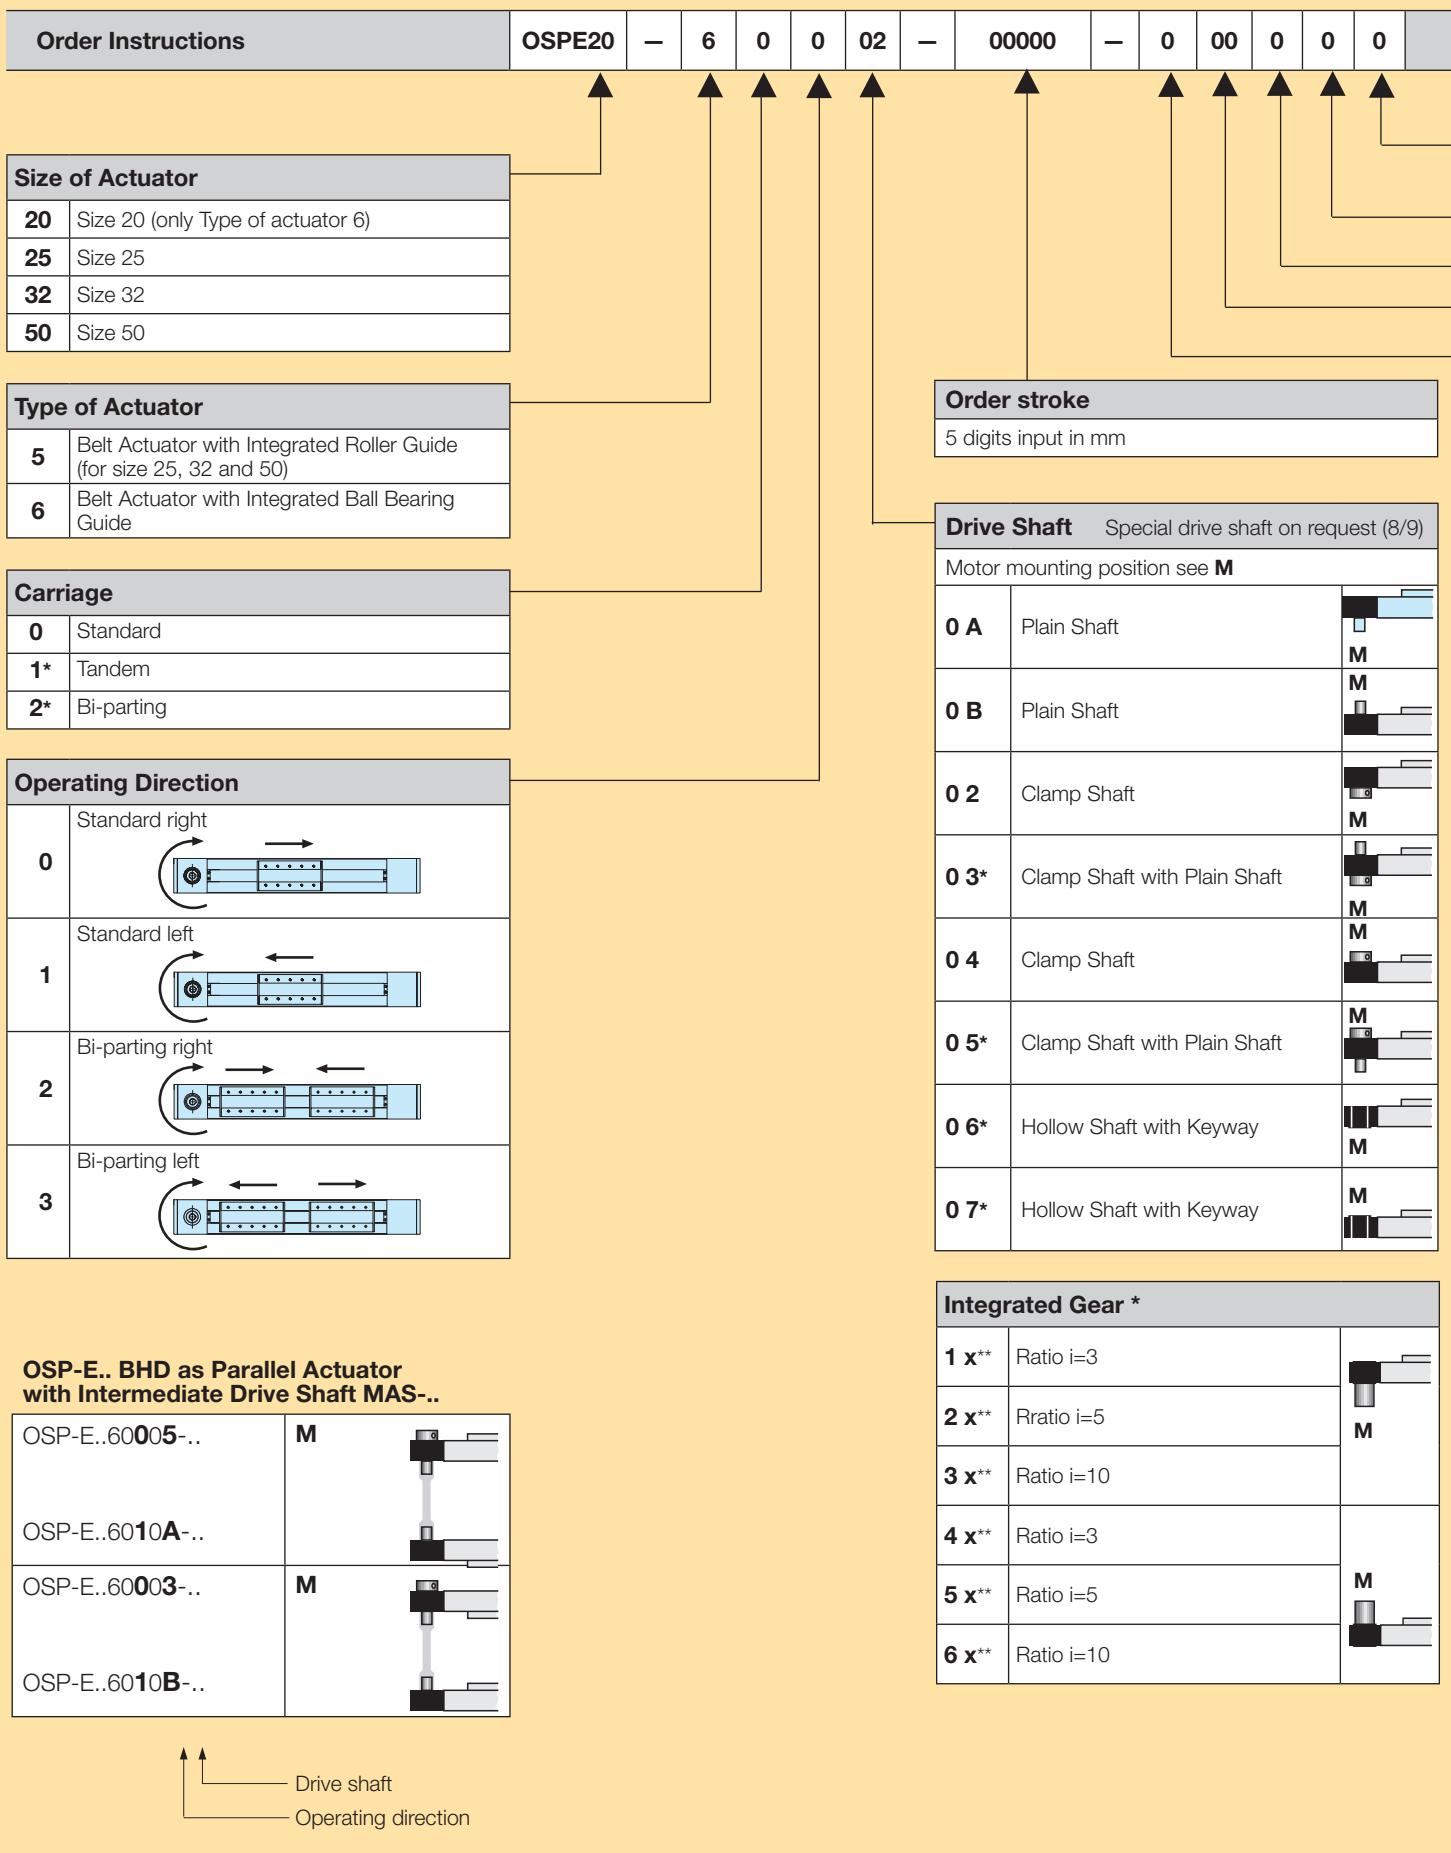

Mounting Kit for Gear *					
Size	20	25	32	50	
A7 PS60		x ²	x ¹		
A8 PS90				x ¹	
A9 PS115					x ¹
C0 LP050 / PV40-TA	x ¹				
C1 LP070 / PV60-TA	x ²	x ¹			
C2 LP090 / PV90-TA			x ¹		
C3 LP120					x ¹

x ¹: Kit for **Drive Shaft** with clamp shaft
(02 / 03 / 04 / 05)

x ²: Kit for **Drive Shaft** with plain shaft
(0A / 0B)

Magnetic Sensors *

0	without
1	1 pc. RST-K 2NO / 5 m cable
2	1 pc. RST-K 2NC / 5 m cable
3	2 pc. RST-K 2NC / 5 m cable
4	2 pc. RST-K 2NC, 1 pc. RST-K 2NO / 5 m cable
5	1 pc. RST-S 2NO / M8 plug
6	1 pc. RST-S 2NC / M8 plug
7	2 pc. RST-S 2NC / M8 plug
8	2 pc. RST-S 2NC, 1 pc. RST-S 2NO / M8 plug
A	1 pc. EST-S NPN / M8 plug
B	2 pc. EST-S NPN / M8 plug
C	3 pc. EST-S NPN / M8 plug
D	1 pc. EST-S PNP / M8 plug
E	2 pc. EST-S PNP / M8 plug
F	3 pc. EST-S PNP / M8 plug

Profile Mounting *

0	without
1	1 Pair Type E1
2	1 Pair Type D1
3	1 Pair Type MAE
4	2 Pair Type 1
5	2 Pair Type D1
6	2 Pair Type MAE
7	3 Pair Type 1
8	3 Pair Type D1
9	3 Pair Type MAE
A	4 Pair Type 1
B	4 Pair Type D1
C	4 Pair Type MAE

Niro	
0	Standard
1*	Niro Screws

End Cap Mounting *

0	without
A	1 pair Type CN
B	1 pair Type CO

Accessories - please order separately

* Option

** for sizes 25, 32 and 5

Vertical Belt Actuator with Integrated Ball Bearing Guide in Multi-Axis Systems

The OSP-E..BV vertical belt actuator with integrated ball bearing guide has been engineered for lifting movements in the Z-axis.


The especially low vibration OSP-E..BV vertical actuator in combination with the heavy duty series OSP-E..BHD meets the highest demands in portal and handling applications.


Advantages

- Fixed Actuator Head for Low Moving Mass
- Integrated Ball Bearing Guide for High Bending Moments
- Magnetic Sensor set for contactless position sensing
- Easy to install
- Low Maintenance

Features

- High Acceleration and Speed
- Drive Shaft Versions with Clamp Shaft or Plain Shaft
- Power Transmission by Belt
- Moving Axis Profile
- Complete Motor and Control Packages

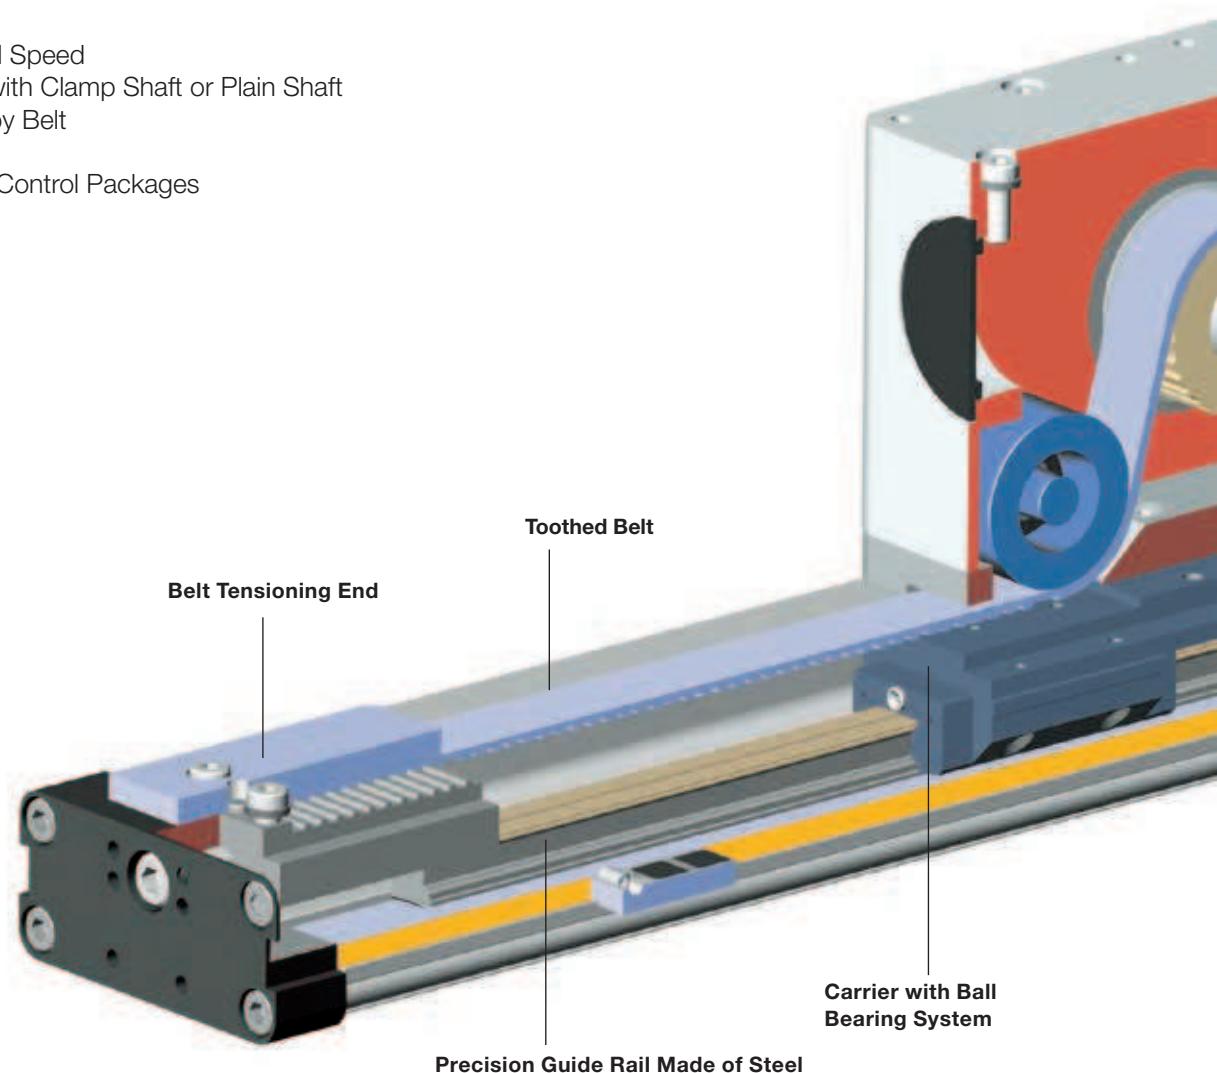

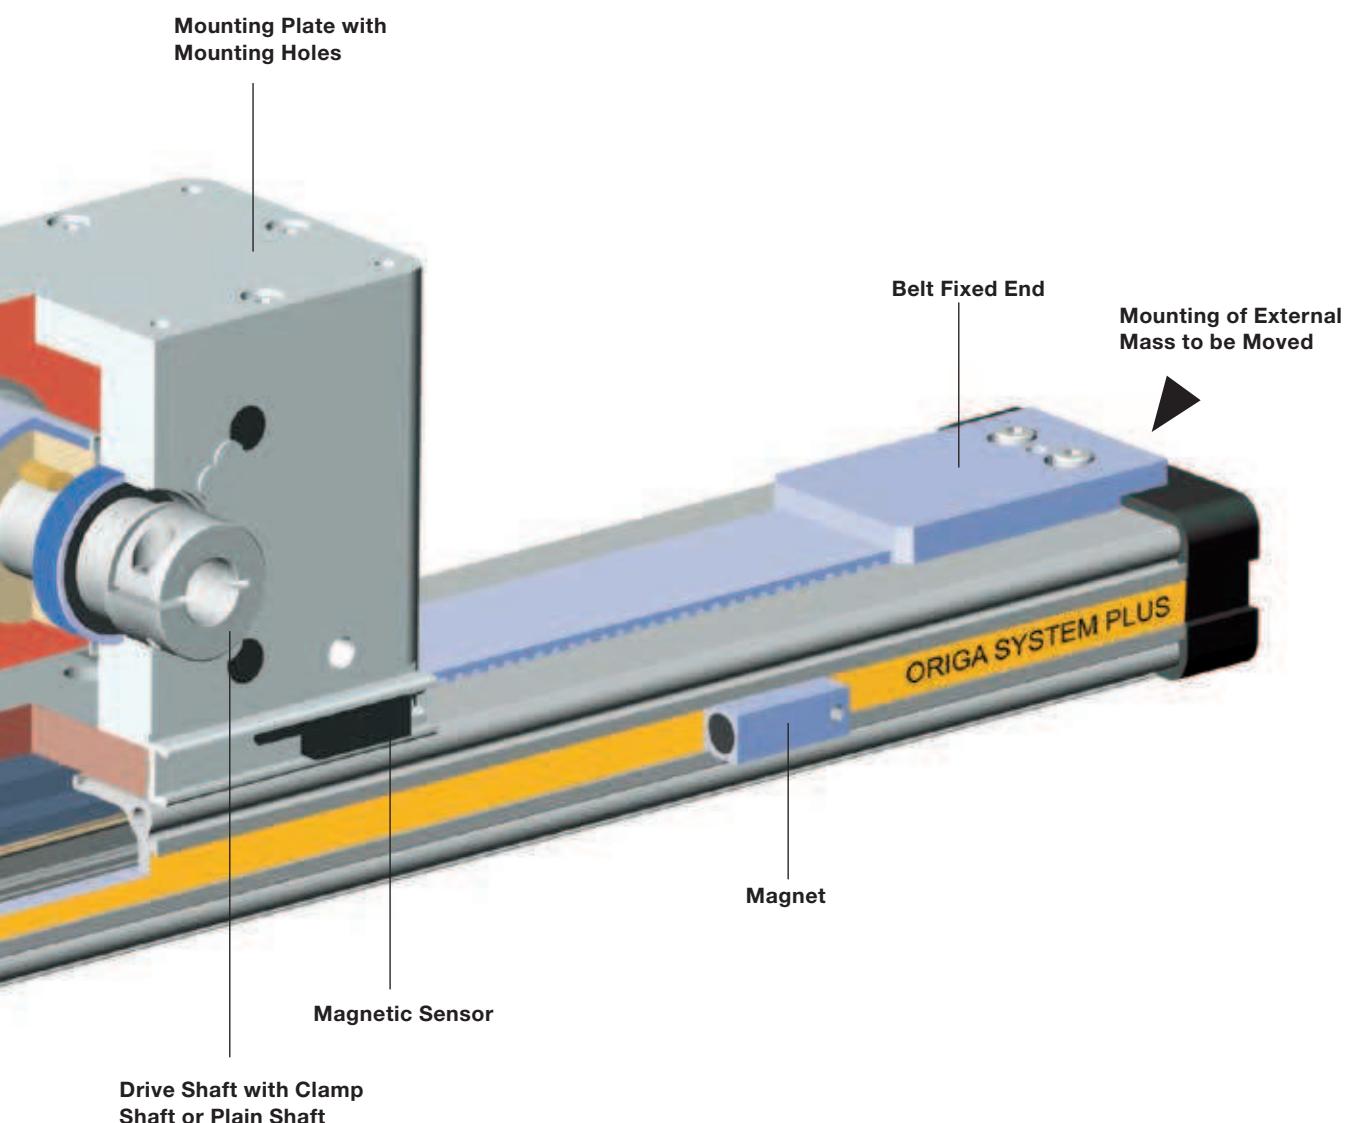

OSP-E..BV, Vertical Belt Actuator with Integrated Ball Bearing Guide

STANDARD VERSION

OSP-E..BV

Standard actuator head with clamp shaft or plain shaft and integrated ball bearing guide with two carriers. Choice of side on which gearbox or motor is to be mounted.

Drive Shaft with Clamp Shaft



Drive Shaft with Plain Shaft



DRIVE SHAFT "CLAMP SHAFT AND PLAIN SHAFT" OR "DOUBLE PLAIN SHAFT"

e.g. for parallel operation of two Z-axes with an intermediate drive shaft.

Drive Shaft with Clamp Shaft and Plain Shaft



Drive Shaft with Double Plain Shaft



ACCESSORIES

MOTOR MOUNTINGS

For connections of gearbox or motor direct to drive shaft with clamp shaft or with a motor coupling to drive shaft with plain shaft.



MAGNETIC SENSORS SET

Magnetic Sensors with connector, mounting rail and magnets for contactless sensing of the end positions. Cable (suitable for cable chain) can be ordered separately in 5 m, 10 m or 15 m length.

OPTIONS


TANDEM

Additional actuator head and two additional carriers for higher bending moments.




HOLLOW SHAFT WITH KEYWAY

For direct connection of gearbox or motor with keyway.



MULTI-AXIS-SYSTEMS

For modular assembly of actuators up to multi-axis systems.

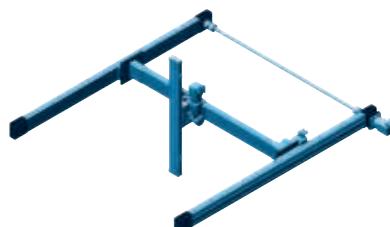

OSP-E..BV Vertical Belt Acutator with Integrated Ball Bearing Guide

Size 20, 25

Standard Version

- Vertical Belt Acutator with Integrated Ball Bearing Guide
- Drive Shaft with Clamp Shaft or Plain Shaft
- Choice of Motor Mounting Side

Options

- Tandem Version for Higher Moments
- Drive Shaft with
 - Clamp Shaft and Plain Shaft or Double Plain shaft
 - Hollow Shaft with Keyway
- Special Drive Shaft Versions on Request



Characteristics

	Symbol	Unit	Description
General Features			
Series			OSP-E..BV
Name			Vertical Belt Actuator with Integrated Ball Bearing Guide
Mounting			see drawings
Temperature Range	g_{\min} g_{\max}	°C	-30 +80
Installation			Vertical
Profile			Extruded Anodized Aluminium
Belt			Steel-Corded Polyurethane
Pulley			Aluminium
Guide			Ball Bearing Guide
Material	Guide Rail		Hardened Steel Rail with High Precision, Accuracy Class N
	Guide Carrier		Steel Carrier with Integrated Wiper System, Grease Nipples, Preloaded 0.08 x C, Accuracy Class N
Sealing Band			Hardened, Corrosion Resistant Steel
Screws, Nuts			Zinc Plated Steel
Encapsulating Class	IP		20

Weight (mass) and Inertia

Series	Total weight (Mass) [kg]		Moving mass [kg]		Inertia [$\times 10^{-6}$ kgm ²]		
	At stroke 0 m	Actuator head	At stroke 0 m	Add per metre stroke	At Stroke 0 m	Add per metre stroke	Add per kg mass
OSP-E20BV	3.4	1.9	1.6	4.0	486	1,144	289
OSP-E25BV	7.7	5.3	2.4	4.4	1,695	2,668	617
OSP-E20BV*	5.3	2 x 1.9	1.6	4.0	533	1,144	289
OSP-E25BV*	13	2 x 5.3	2.4	4.4	1,915	2,668	617

* Version: Tandem (Option)

Installation Instructions

Make sure that the OSP-E..BV is always operated by motor with holding brake on the acutator side.

For the mounting there are threaded holes in the end caps. Before mounting, check the correct centre of gravity distance from the table. Mount the external mass on the belt fixed end, so that the belt tension can be checked and adjusted at the belt tensioning end without dismantling.

Maintenance

Depending on operating conditions, inspection of the actuator is recommended after 12 months or 3000 km operation.

Please refer to the operating instructions supplied with the actuator.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the acutator as a machine into service, the user must ensure the adherence to the EC Machine Directive 2006/42/EG.

Sizing, Performance Overview, Maximum Loadings

Sizing of Actuator

The following steps are recommended:

1. Determination of the lever arm length l_x , l_y and l_z from m_e to the centre axis of the actuator.
2. Calculation of the static and dynamic force F_A which must be transmitted by the belt.

$$F_A = F_g + F_a + F_0$$

$$= m_g \cdot g + m_g \cdot a + M_0 \cdot 2\pi / U_{ZR}$$
3. Calculation of all static and dynamic moments M_x , M_y and M_z which occur in the application.

$$M = F \cdot I$$
4. Selection of maximum permissible loads via Table T3.
5. Calculation and checking of the combined load, which must not be higher than 1.
6. Checking of the maximum moment that occurs at the drive shaft in Table T2.

7. Checking of the required action force F_A with the permissible load value from Table T1.

For motor sizing, the effective torque must be determined, taking into account the cycle time.

Performance Overview

Characteristics	Unit	Description													
Series		OSP-E20BV	OSP-E25BV												
Max. Speed	[m/s]	3.0	5.0												
Linear Motion per Revolution of Drive Shaft	[mm/U]	108	160												
Max. rpm. Drive Shaft	[min ⁻¹]	1700	1875												
Max. Effective Action Force F_A at Speed	<table border="1"> <tr> <td>1m/s</td> <td>[N]</td> <td>650</td> <td>1,430</td> </tr> <tr> <td>1 - 2m/s</td> <td>[N]</td> <td>450</td> <td>1,200</td> </tr> <tr> <td>>3 - 5m/s</td> <td>[N]</td> <td>–</td> <td>1,050</td> </tr> </table>	1m/s	[N]	650	1,430	1 - 2m/s	[N]	450	1,200	>3 - 5m/s	[N]	–	1,050		
1m/s	[N]	650	1,430												
1 - 2m/s	[N]	450	1,200												
>3 - 5m/s	[N]	–	1,050												
No-Load Torque ²⁾	[Nm]	0.6	1.2												
Max. Acceleration/Deceleration	[m/s ²]	20	20												
Repeatability	[mm/m]	0.05	0.05												
Max. Standard Stroke Length ¹⁾	[mm]	1,000	1,500												
Max. Recommended Permissible Mass ³⁾	[kg]	10	20												

¹⁾ Longer strokes on request

²⁾ As a result of static friction force

³⁾ vertical

T1

Max. Permissible Torque on Drive Shaft Speed / Stroke

OSP-E-20BV				OSP-E-25BV			
Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]
1	19	1	17	1	36	1	36
2	17	2	11	2	30	2	36
3	16			3	30		
				4	28		
				5	27		

T2

Important:

The maximum permissible torque on the drive shaft is the lowest value of the speed- or stroke-dependent torque value.

Example above:

OSP-E25BV required speed $v = 3$ m/s and stroke = 1 m.

Accordingly Table T2 shows permissible moments of 30 Nm for the speed and 36 Nm for the stroke. Therefore the maximum moment at the drive shaft is determined by the speed and must not exceed 30 Nm.


Legend

l = distance of a mass in the x-, y- and z-direction from the guide [m]
 m_e = external moved mass [kg]
 m_{LA} = moved mass of actuator [kg]
 m_g = total moved mass ($m_e + m_{LA}$) [kg]
 F_A = action force [N]
 M_0 = no-load torque [Nm]
 U_{ZR} = circumference of the pulley (linear movement per revolution) [m]
 g = gravity [m/s²]
 a_{max} = maximum acceleration [m/s²]

Maximal Permissible Loads

Series	max. applied load		max. moments		
	F _y [N]	F _z [N]	M _x [Nm]	M _y [Nm]	M _z [Nm]
OSP-E20BV	1600	1600	20	100	100
OSP-E25BV	2000	3000	50	200	200

T3

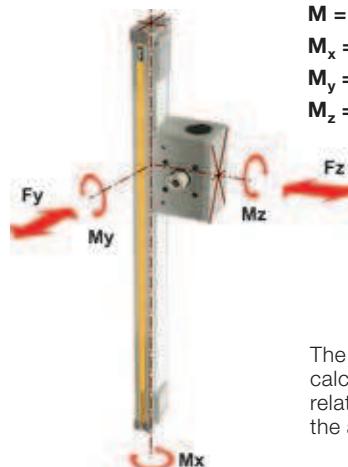Forces, Loads and Moments

$$M = F \cdot l \text{ [Nm]}$$

$$M_x = M_x \text{ statically} + M_x \text{ dynamically}$$

$$M_y = M_y \text{ statically} + M_y \text{ dynamically}$$

$$M_z = M_z \text{ statically} + M_z \text{ dynamically}$$

The distance (l_x, l_y, l_z) for calculation of moments relates to the centre axis of the actuator.

Combined Loads

If the actuator is subjected to several forces, loads and moments at the same time, the maximum load is calculated with the equation shown here.

The maximum permissible loads must not be exceeded.


Equation of Combined Loads

$$\frac{F_y}{F_y \text{ (max)}} + \frac{F_z}{F_z \text{ (max)}} + \frac{M_x}{M_x \text{ (max)}} + \frac{M_y}{M_y \text{ (max)}} + \frac{M_z}{M_z \text{ (max)}} \leq 1$$

The total of the loads must not exceed >1 under any circumstances.

Distance of Centre of Gravity of External Mass from Mid-Point of Actuator



Mass [kg]	OSP-E20BV		OSP-E25BV	
	Lever arm l _z [mm]	Max. permissible acceleration/ deceleration [m/s ²]	Lever arm l _z [mm]	Max. permissible acceleration/ deceleration [m/s ²]
> 3 to 5	0	20	50	20
> 5 to 10	0	20	40	20
> 10 to 15	-	-	35	20
> 15 to 20	-	-	30	15

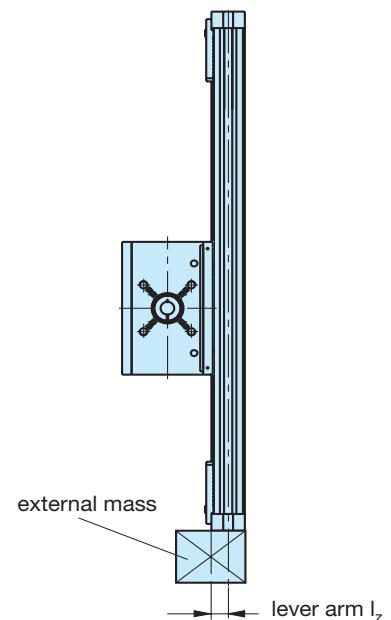

OSP-E..BV

Vertical Belt Actuator with Integrated Ball Bearing Guide

Basic Unit

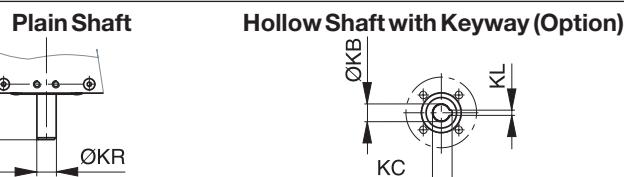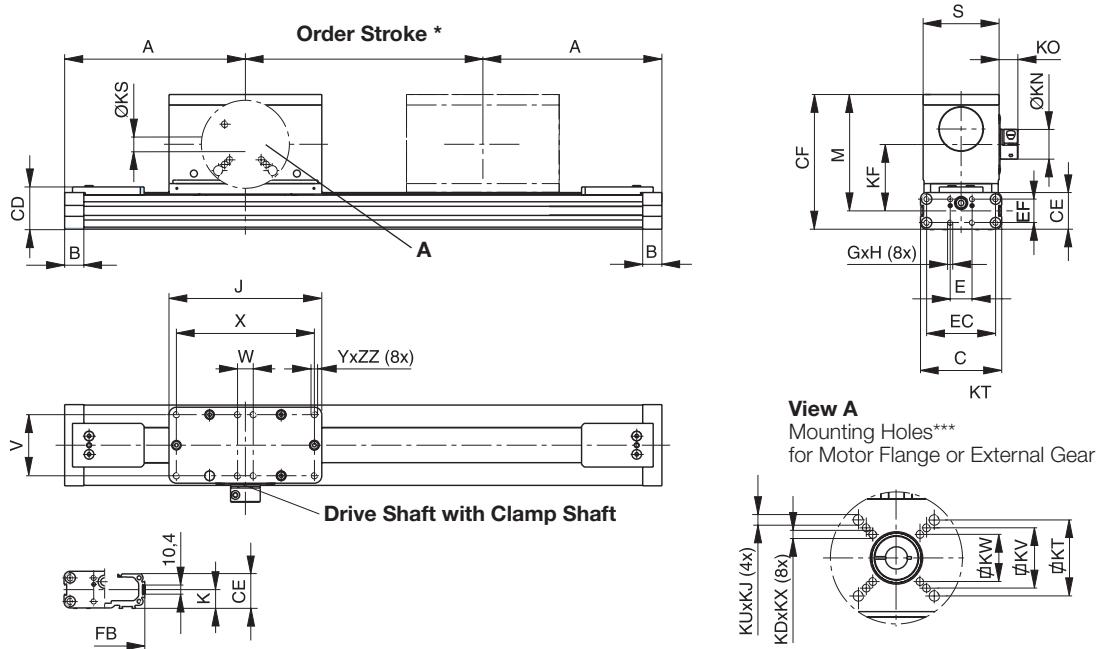


Series	ØKB	KC	KL	KP	ØKR
OSP-E20BV	12 ^{H7}	13.8	4	28.5	12 _{h7}
OSP-E25BV	16 ^{H7}	18.3	5	31.5	16 _{h7}

* Note:

The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 100 mm. Order stroke = required travel + 2 x safety distance. The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems. For further information please contact your local Parker representative.

Option – Tandem

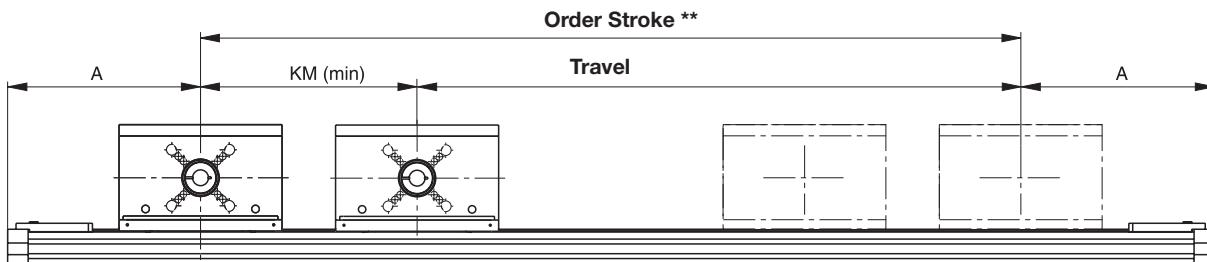

** Order stroke = required travel + KM min + 2 x safety distance.

*** The mounting holes for the coupling housing are on the motor-mounting side.

Therefore please ensure that the motor mounting side is correctly stated when ordering the actuator. (For special drive shafts, other dimensions for KS and KB are available on request – see order instructions.)



Dimension Table [mm]

Series	A	B	C	E	GxH	J	K	M	S	V	W	X	Y	CD	CE	CF
OSP-E20BV	148	22	93	25	M5x12	139	21.1	102.3	68	51	40	120	M6	40.4	34	123.3
OSP-E25BV	210	22	93	25	M5x12	175	21.5	133.5	87	70	18	158	M6	49.0	42	154.5
Series	EC	EF	FB	FH	KDxKX	KF	KM _{min}	KN	KO	KS	KT	KUxKJ	KV	KW	ZZ	
OSP-E20BV	59	21	73	36.0	–	61.3	155	27	16	12 ^{H7}	46.5	M6x10	36	–	10	
OSP-E25BV	79	27	92	39.5	M6x16	76.0	225	34	21.5	16 ^{H7}	58.0	M8x16	46	36	10	

Contactless Position Sensing with Magnetic Sensors

The magnetic sensor set, comprising two magnetic sensors, a mounting rail and two magnets, is for contactless sensing of the end positions. The mounting rail and magnetic sensors are mounted on the actuator head and the magnets are mounted in the dovetail slot on the profile. The magnetic sensors are the RST-S Type (connector version). For the connecting cable Parker recommends the use of cable suitable for cable chain.

Dimensions

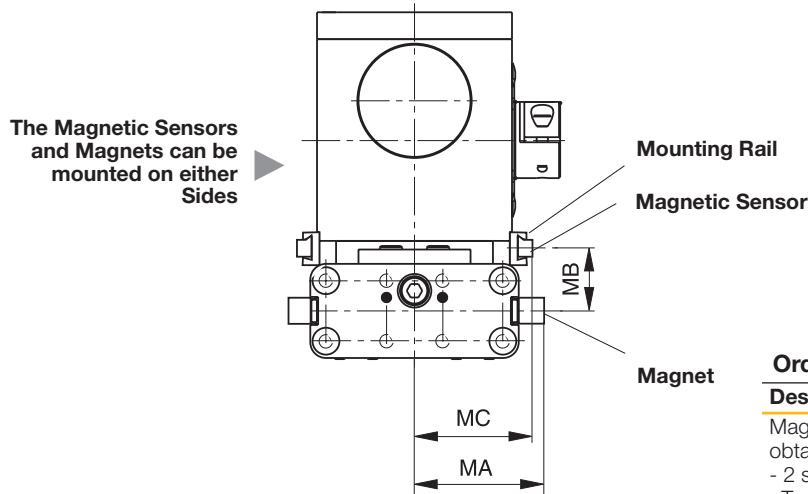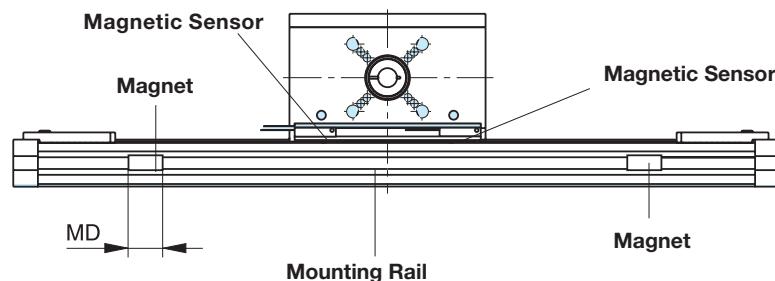

Dimension table [mm]

Series	MA	MB	MC	MD
OSP-E20BV	46	23.7	42.3	35
OSP-E25BV	56	26.0	51.0	35

Order Instructions

Description	Ident-No.
Magnetic sensor set, obtaining:	18210
- 2 sensors, Reed NC, Type P8S-GESNX	
- 1 mounting rail	
- 2 magnets	
Connecting cable, suitable for cable chain	
5 m	KL3186
10 m	KL3217
15 m	KL3216

Magnetic Sensors *	
0	without
2*	2pc. RST-S NC / M8 plug / Magnets

Mounting Kit for Motor and Gear *			
Size	20	25	
A3	SMx82 xx xx 8 14 ...	x ²	x ²
A7	PS60	x ²	x ¹
C0	LP050 / PV40-TA	x ¹	
C1	LP070 / PV60-TA	x ²	x ¹

X ¹: Kit for **Drive Shaft** with Clamp Shaft
(02 / 03 / 04 / 05)

X ²: Kit for **Drive Shaft** with Plain Shaft
(0A / 0B / 0C / 0D)

Niro	
0	Standard
1*	Niro Screws

Function and Motor Mounting

Belt Tensioning End

Side For Motor Mounting
Drive Shaft(S)
A, C, 2, 3, 6

Belt Fixed End

End Cap for Mounting
External Moved Mass

* Option

Accessories - please order separately

Belt Actuator with Internal Plain Bearing Guide for Point-to-Point Applications


A high performing, innovative range of actuators which can be integrated into any machine layout neatly and simply.

Advantages

- Precise Path and Position Control
- High Speed Operation
- Easy Installation
- Low Maintenance
- Ideal for Precise Point-to-Point Applications


Features



- Integrated Drive and Guidance System
- Tandem Configuration with Increased Carrier Distance for Higher Moment Supports
- Long Available Strokes
- Complete Motor and Control Packages
- Diverse Range of Accessories and Mountings
- Bi-Parting and Special Options Available

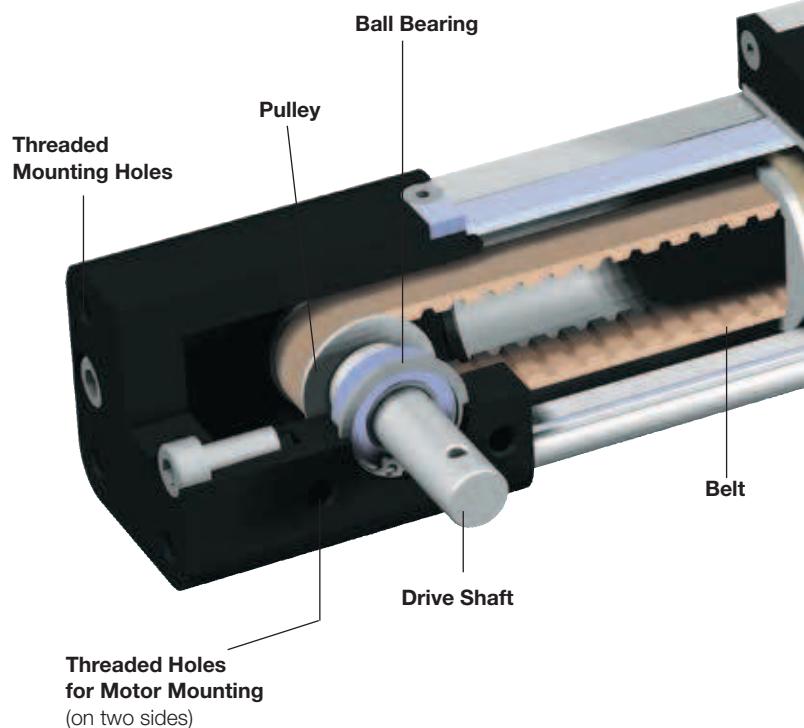


Tandem configuration

with increased carrier distance for higher moment supports. Bi-parting version for precise synchronized movements:

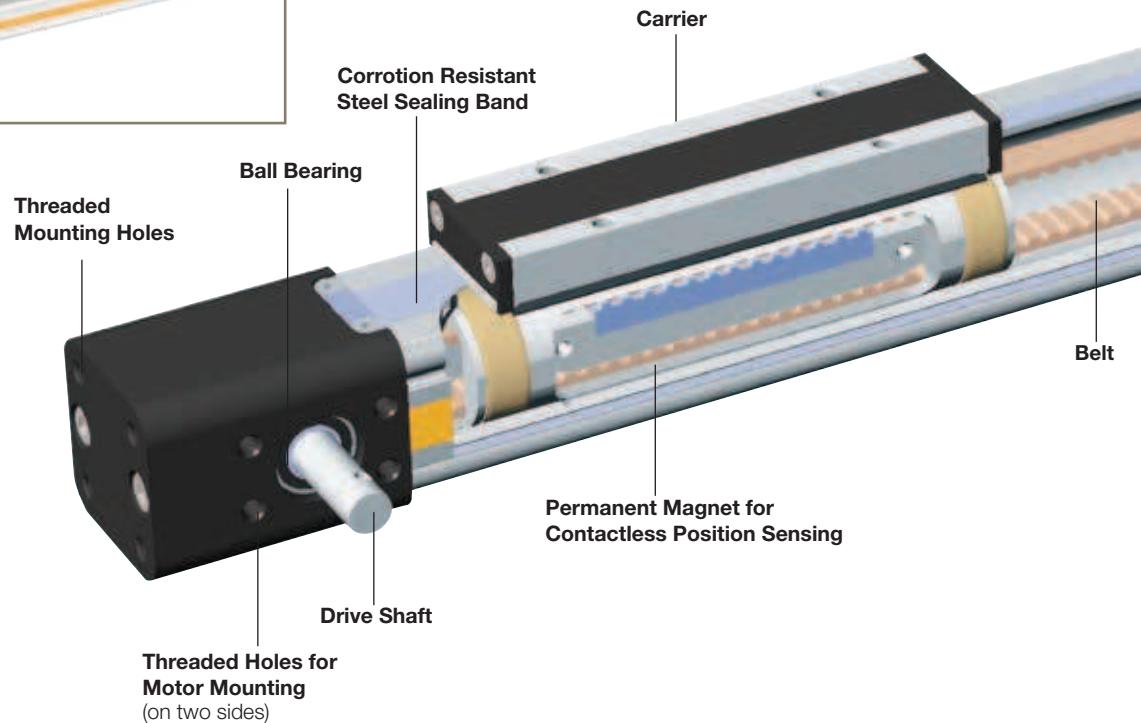

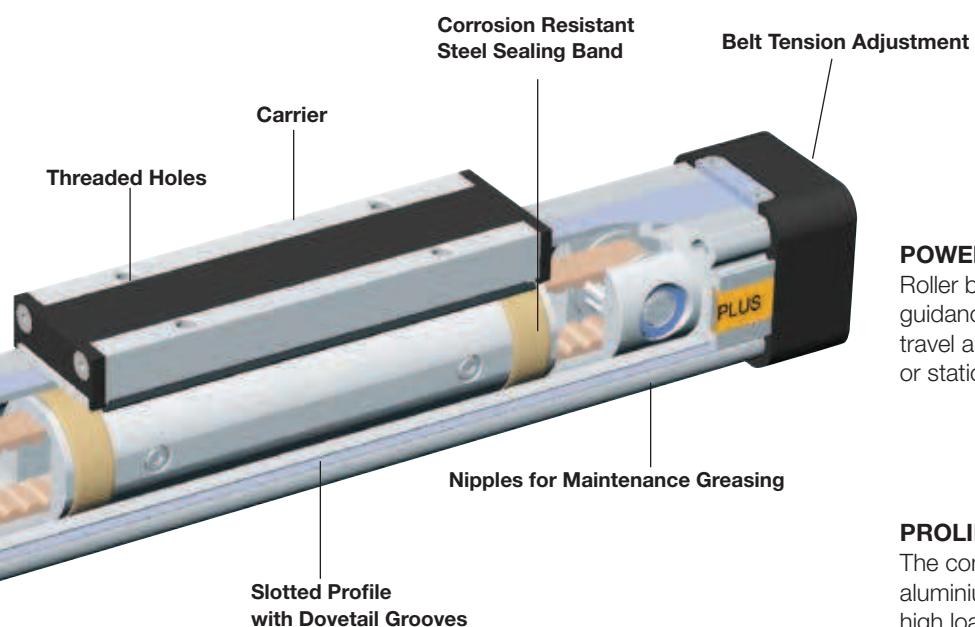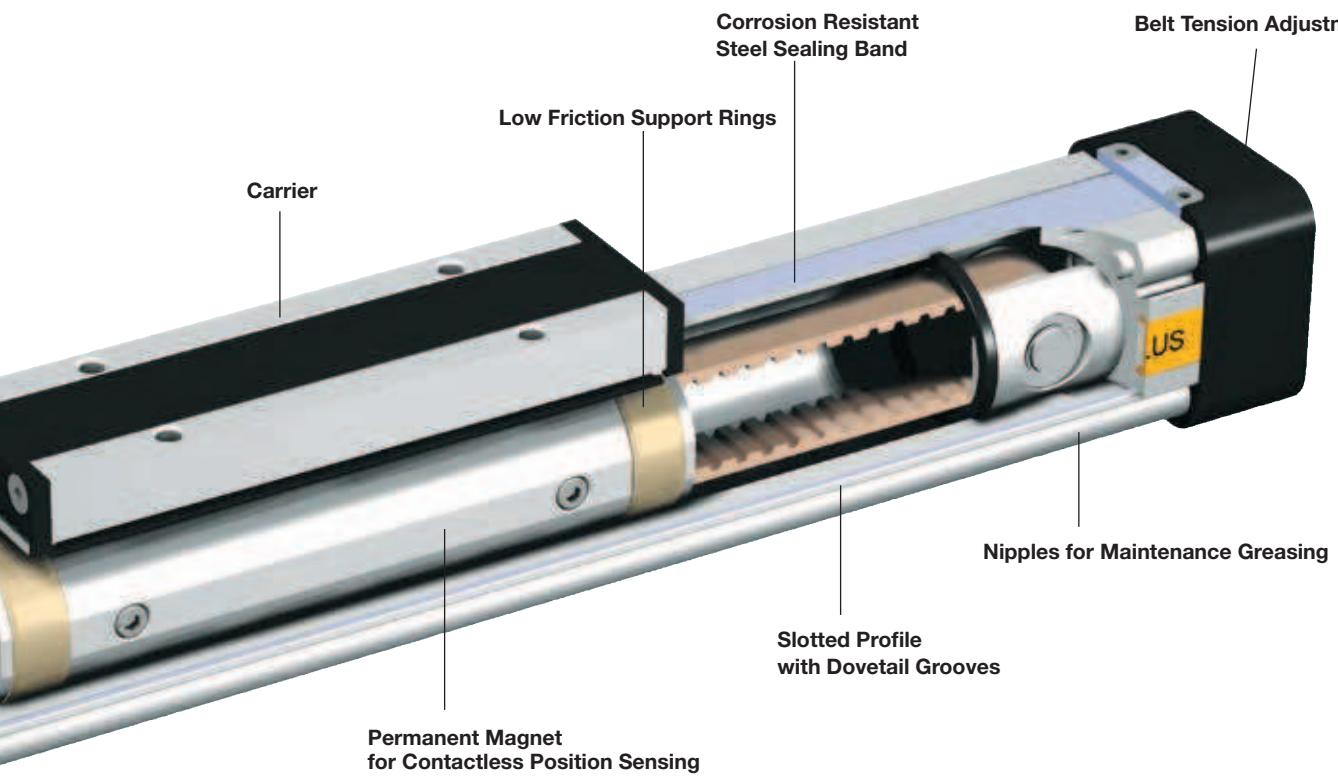


POWERSLIDE
Roller bearing precision guidance for smooth travel and high dynamic or static loads.



PROLINE
The compact aluminium roller guide for high loads and velocities.



The dovetailed mounting rails of the new actuator expand its function into that of a universal system carrier. Modular system components are simply clamped on.




OSP-E..B Belt Actuator with Internal Plain Bearing Guide

STANDARD VERSIONS


OSP-E..B

Carrier with internal guidance and magnet packet for contactless position sensing. Dovetail profile for mounting of accessories and the actuator itself.

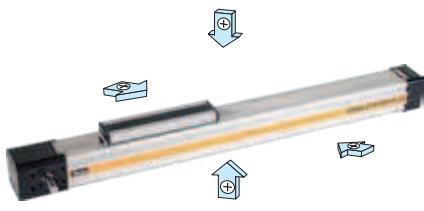

DRIVE SHAFT VERSIONS

- Plain shaft or
- Double plain shaft (Option)
e. g. to drive two actuators in parallel.

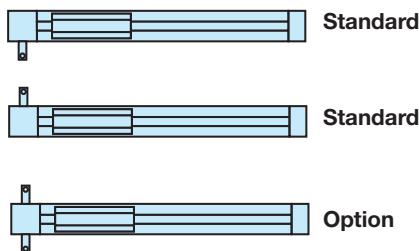

OPTIONS

TANDEM

For higher moment support.



BI-PARTING

For perfectly synchronised bi-parting movements.



ACCESSORIES

MOTOR MOUNTING



END CAP MOUNTING

For end-mounting of the actuator.



PROFILE MOUNTING

For supporting long actuators or mounting the actuator on the dovetail grooves.



CLEVIS MOUNTING

Carrier with tolerance and parallelism compensation to drive external linear guides.



INVERSION MOUNTING

The inversion mounting, mounted on the carrier, transfers the driving force to the opposite side, e.g. for dirty environments.



MAGNETIC SENSORS

SERIES RST AND EST

For contactless position sensing of end stop and intermediate carrier positions.




OSP-E..B Belt Actuator with Internal Plain Bearing Guide



- Size 25, 32, 50


Standard Version

- Standard Carrier with Internal Plain Bearing Guide
- Dovetail Profile for Mounting of Accessories and the Actuator itself
- Position of Drive Shafts



Options

- Tandem-Version
- Bi-parting Version for Synchronised Movements
- Drive Shaft with Double Plain Shaft



Characteristics

	Symbol	Unit	Description
General Features			
Series			OSP-E..BHD
Name			Belt Actuator with Internal Plain Bearing Guide
Mounting			see drawings
Temperature Range	ϑ_{\min} ϑ_{\max}	°C	-30 +80
Installation			see table
Slotted Profile			Extruded Anodized Aluminium
Belt			Steel-corded Polyurethane
Pulley			Aluminium
Material			
Guide Bearings			Low Friction Plastic
Sealing Band			Hardened Corrosion Resistant Steel
Screws, Nuts			Zinc Plated Steel
Mountings			Zinc Plated Steel and Aluminium
Encapsulation Class	IP		54

Weight (mass) and Inertia

Series	Weight (mass) [kg]			Inertia [$\times 10^{-6}$ kgm ²]	
	at stroke 0 m	ad per metre stroke	moving mass	at stroke 0 m	ad per metre stroke
OSP-E25B	0.9	1.6	0.2	25	6.6
OSP-E32B	1.9	3.2	0.4	43	10
OSP-E50B	5.2	6.2	1.0	312	45
OSP-E25B*	1.2	1.6	0.5	48	6.6
OSP-E32B*	2.3	3.2	0.8	83	10
OSP-E50B*	6.3	6.2	2.1	585	45

*Version: Tandem and Bi-parting (Option)

Installation Instructions

Use the threaded holes in the end cap for mounting the actuator. See if profile mountings are needed using the maximum allowable unsupported length graph on page 43. At least one end cap must be secured to prevent axial sliding when profile mounting is used. When the actuator is moving an externally guided load, the compensation must be used.

The actuators can be fitted with the standard carrier mounting facing in any direction. To prevent contamination such as fluid ingress, the actuator should be fitted with its sealing band facing downwards. The inversion mounting can be fitted to transfer the driving force to the opposite side.

Maintenance

All moving parts are long-term lubricated for a normal operational environment. Parker recommends a check and lubrication of the actuator, and if necessary a change of the belt and wear parts, after an operation time of 12 months of operation or 3000 km travel of distance.

Additional greasing is easily done by using nipples in the slotted profile. Please refer to the operating instructions supplied with the actuator.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the actuator as a machine into service, the user must ensure the adherence to the EC Machine Directive 2006/42/EG.

Sizing, Performance Overview, Maximum Loadings

Sizing of Actuator

The following steps are recommended for selection:

1. Required acceleration see table

2. Required torque is shown on page 42 and 43.

3. Check that maximum values in the table 3 are not exceeded .

4. Drive shaft by using table T2.
(Pay attention to note under table)
If value is lower than required,
overview the moving profile or
select if possible a bigger unit.

5. Before sizing and specifying the motor, the average torque must be calculated using the cycle time of the application.

6. Check that the maximum allowable unsupported length is not exceeded (see on page 41).

Performance Overview

T1

Characteristics		Unit	Description		
Size			OSP-E25B	OSP-E32B	OSP-E50B
Max. Speed	[m/s]	2	3	5	
Linear Motion per Revolution, Drive Shaft	[mm]	60	60	100	
Max. rpm Drive Shaft	[min ⁻¹]	2,000	3,000	3,000	
Max. Effective Action Force F_A at Speed	< 1 m/s [N]	50	150	425	
	1 - 2 m/s [N]	50	120	375	
	> 2 m/s [N]	-	100	300	
No-load Torque	[Nm]	0.4	0.5	0.6	
Max. Acceleration/Deceleration	[m/s ²]	10	10	10	
Repeatability	[mm/m]	±0.05	±0.05	±0.05	
Max. Stroke Length OSP-E..B	[mm]	3,000	5,000	5,000	
Max. Stroke Length OSP-E..B*	[mm]	2 x 1,500	2 x 2,500	2 x 2,500	

*Bi-parting version

Maximum Permissible Torque on Drive Shaft Speed/Stroke

T2

OSP-E-25B				OSP-E-32B				OSP-E-50B			
Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]	Speed [m/s]	Torque [Nm]	Stroke [m]	Torque [Nm]
1	0.9	1	0.9	1	2.3	1	2.3	1	10.0	1	10.0
2	0.9	2	0.9	2	2.0	2	2.3	2	9.5	2	10.0
		3	0.9	3	1.8	3	2.3	3	9.0	3	9.0
						4	2.3	4	8.0	4	7.0
						5	1.8	5	7.5	5	6.0

Important: The maximum permissible torque on the drive shaft is the lowest value of the speed- or stroke-dependent torque value.

Example above: OSP-E32B stroke 2 m, required speed 3 m/s; From table T2: speed 3 m/s gives 1.8 Nm and stroke 2 m gives 2.3 Nm. Max. torque for this application is 1.8 Nm.

Maximum Permissible Loads

T3

Series	Max. applied load F_z [N]	Max. moments [Nm]		
		M_x	M_y	M_z
OSP-E25B	160	2	12	8
OSP-E32B	300	8	25	16
OSP-E50B	850	16	80	32

OSP-E..B Bi-partional
The maximum load F must be equally distributed among the two carriers.

Combined Loads


If the actuator is subjected to several forces, loads and moments at the same time, the maximum load is calculated with the equation shown here. The maximum permissible loads must not be exceeded.

Equation of Combined Loads

$$\frac{F_y}{F_y(\text{max})} + \frac{F_z}{F_z(\text{max})} + \frac{M_x}{M_x(\text{max})} + \frac{M_y}{M_y(\text{max})} + \frac{M_z}{M_z(\text{max})} \leq 1$$

The total of the loads must not exceed >1 under any circumstances.

Forces, Loads and Moments

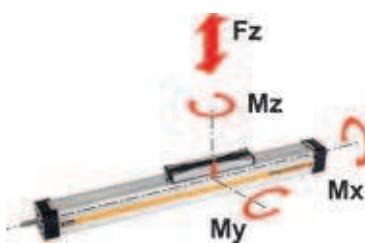

$$M = F \cdot l \text{ [Nm]}$$

$$M_x = M_x \text{ statically} + M_x \text{ dynamically}$$

$$M_y = M_y \text{ statically} + M_y \text{ dynamically}$$

$$M_z = M_z \text{ statically} + M_z \text{ dynamically}$$

The distance l (l_x, l_y, l_z) for calculation of moments relates to the centre axis of the actuator.

Stroke Length

The stroke lengths of the actuators are available in multiples of 1 mm up to max.

OSP-E25B: 3 m / 2 x 1.5 m *

OSP-E32B: 5 m / 2 x 2.5 m *

OSP-E50B: 5 m / 2 x 2.5 m *


* Version: Bi-partional

Other stroke lengths are available on request.



The end of stroke must not be used as a mechanical stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft.

The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems. For advise, please contact your local Parker technical support department.

Maximum Permissible Unsupported Length – Placing of Profile Mounting

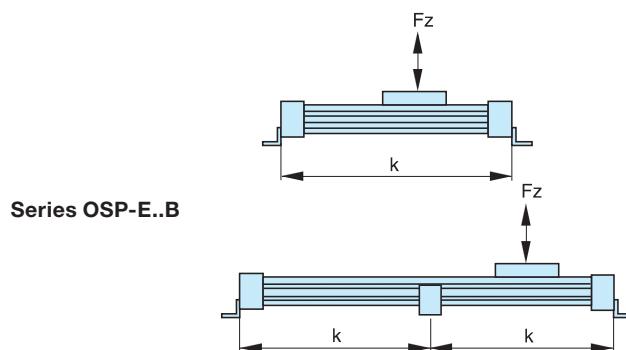

k = Maximum permissible distance between mountings/mid-section support for a given load F .

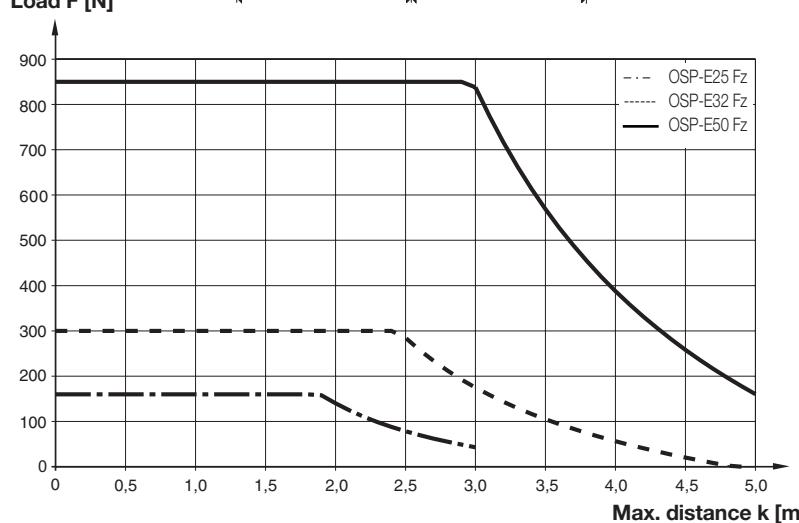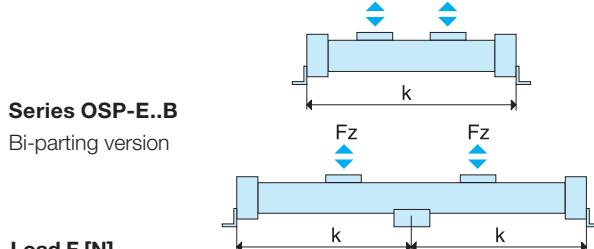


(Up to the curve in the above graph the deflection will be max. 0.2 % of distance k)

Mounting on the Drive Shaft

Do not expose the drive shaft to uncontrolled axial or radial forces when mounting coupler or pulley, a steady block should be used.

Pulley

Minimum allowable number of teeth Z (AT5) at maximum applied torque.

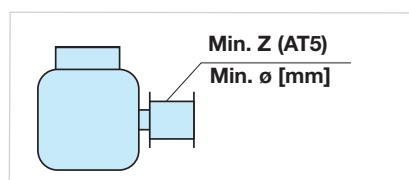


Series	Min. Z	Min Ø
OSP-E25B	24	38
OSP-E32B	24	38
OSP-E50B	36	57

Distance / Time Graph


Using the required travel distance and total time, the adjacent graphs show the required acceleration based on maximum speed.

The graphs assume that acceleration and deceleration are equal. Please note that specifying non-essential high acceleration or short cycle time will result in an oversized motor.


Max. Speed 1 m/s

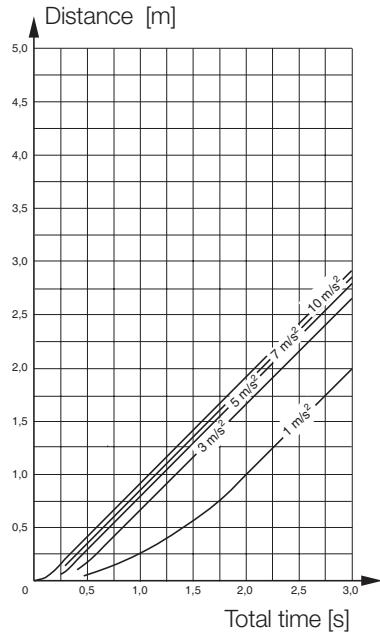


Max. Speed 2 m/s

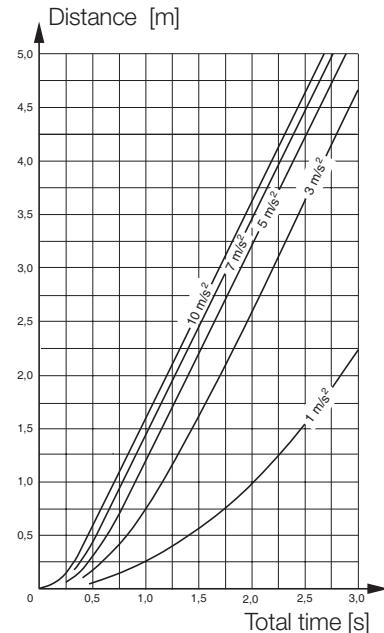

Max. Speed 3 m/s

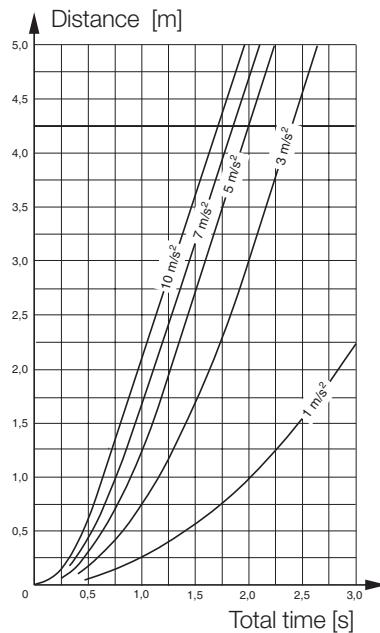

Max. Speed 5 m/s

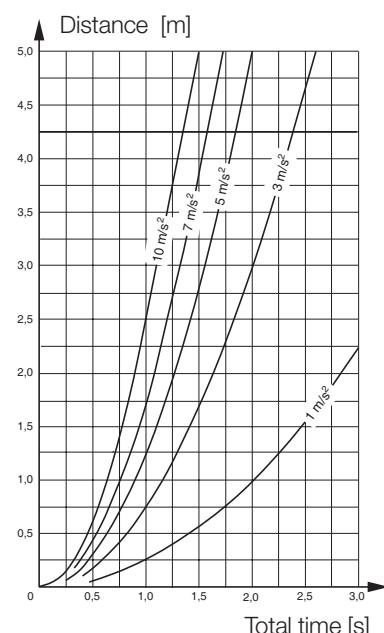


Required Torque / Mass

Using the known mass, the direction of the application and the required acceleration from the distance-time graphs, the actuator can be sized and the required torque is shown in the adjacent graphs.


Mass in graphs = Load + moving mass of the actuator (according to the weight chart on data sheet 41 ff).

Please note: When using an additional guide, please add the mass of the carriage to the total moving mass.


Size OSP-E25B, Horizontal Application

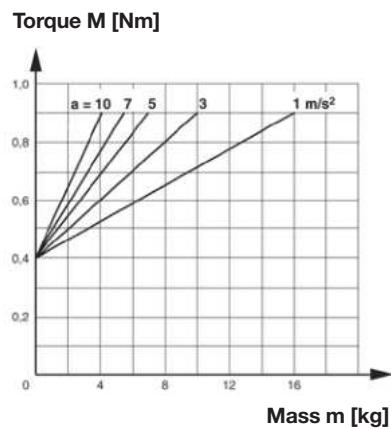


Size OSP-E25B, Vertical Application

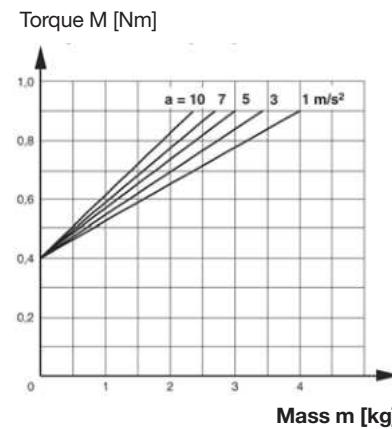


Size OSP-E32B, Horizontal Application

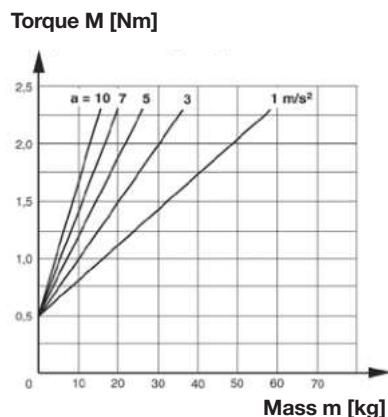


Size OSP-E32B, Vertical Application

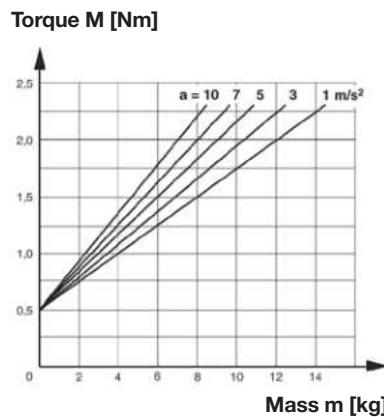

Size OSP-E50B, Horizontal Application

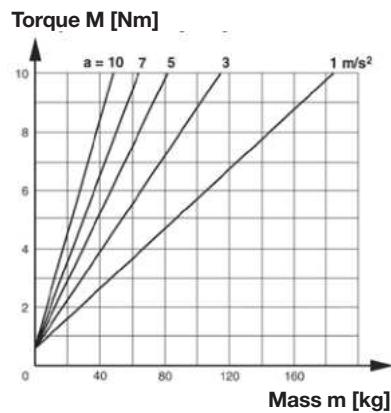


Size OSP-E50B, Vertical Application

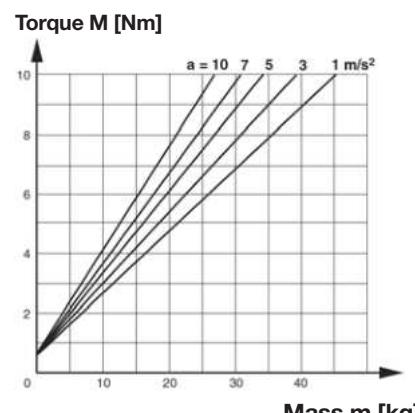


OSP-E

Belt Actuator with Internal Plain Bearing Guide

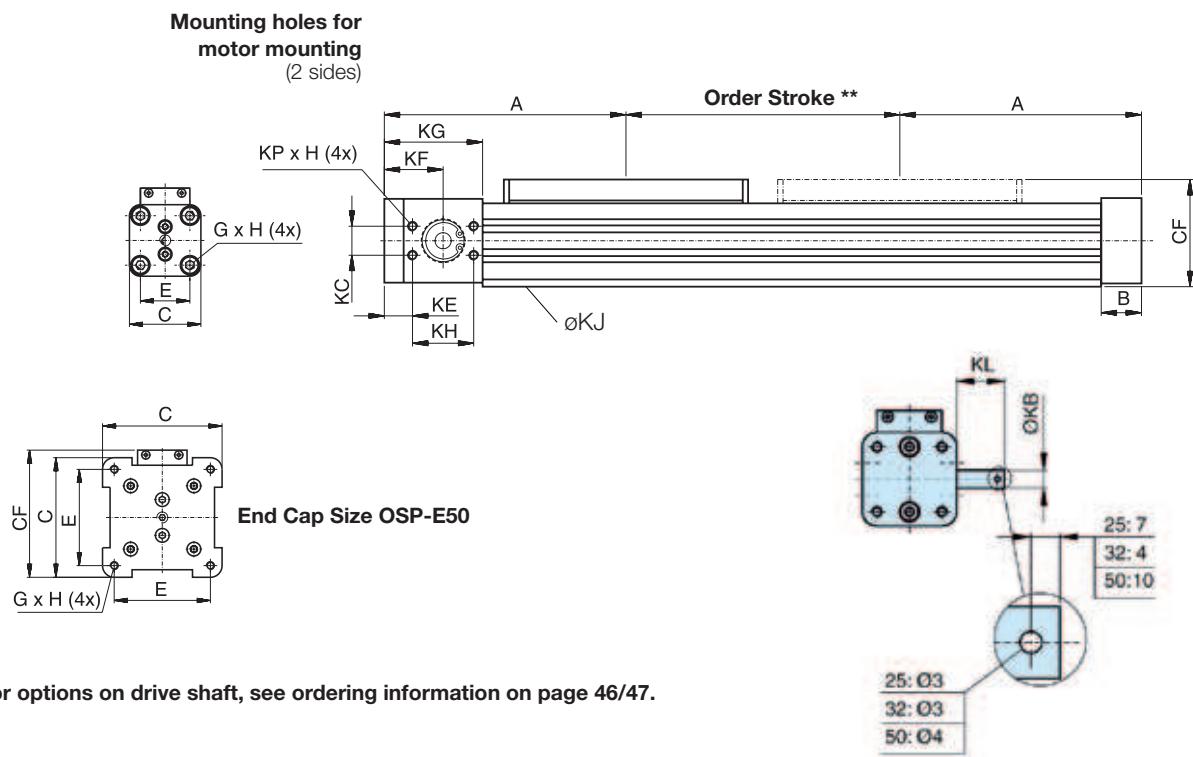


* **Note:** The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 100 mm. Order stroke = required travel + 2 x safety distance.
The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems. For further information please contact your local Parker representative.

Option – Tandem

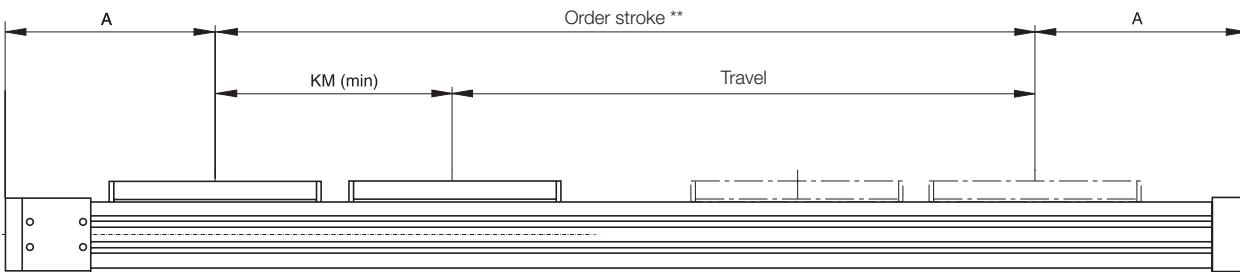


** Order stroke = required travel + KM min + 2 x safety distance

Option – Bi-parting



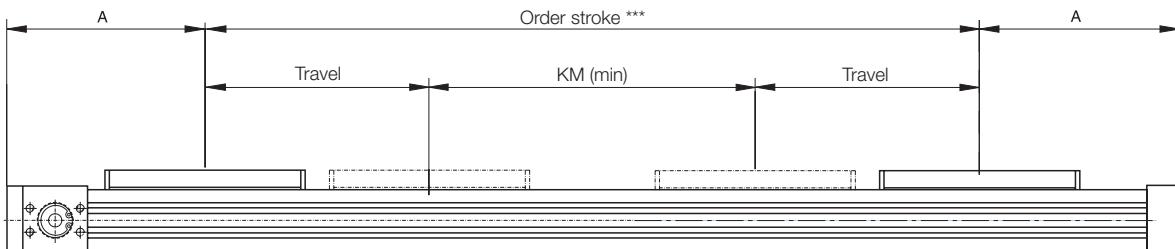


*** Order stroke = 2 x required travel + KM min + 2 x safety distance

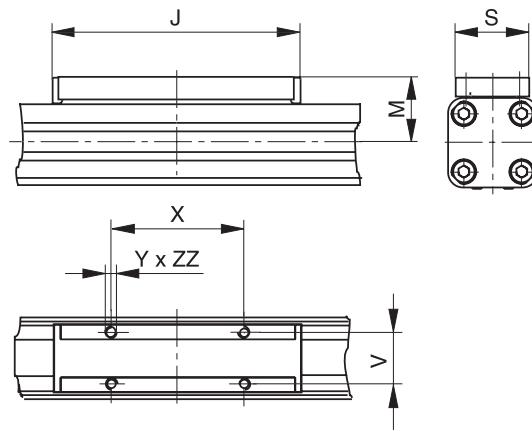Standard Carrier**Dimension Table [mm]**

Series	A	B	C	E	G x H	J	K	M	S	V	X	Y	CF
OSP-E25B	125	22	41	27	M5 x 10	117	21.5	31	33	25	65	M5	52.5
OSP-E32B	150	25	52	36	M6 x 12	152	28.5	38	36	27	90	M6	66.5
OSP-E50B	200	25	87	70	M6 x 12	200	43.0	49	36	27	110	M6	92.5

Series	FB	FH	KB	KC	KE	KF	KG	KH	KJ	KL	KM _{min}	KM _{rec.}	KP x H	ZZ
OSP-E25B	40	39.5	10 _{j6}	15	22.0	37.0	57	30	19 ^{H7}	24	130	190	M5 x 10	8
OSP-E32B	52	51.7	10 _{j6}	18	17.5	36.5	61	38	26 ^{H7}	26	170	230	M6 x 12	10
OSP-E50B	76	77.0	16 _{h8}	32	23.5	48.5	85	50	40 ^{H7}	34	220	320	M8 x 16	10

Order Instructions		OSPE25	-	0	0	0	0	0 -	00000	-	0	0	0	0	0	0
Size of Actuator																
25	Size 25															
32	Size 32															
50	Size 50															
Type of Actuator																
0	Belt Actuator with Internal Plain Bearing Guide															
Carriage																
0	Standard															
1*	Tandem															
2*	Bi-parting															
Drive Shaft / Motor Mounting Position																
0	Plain Shaft / Motor Standard															
1	Plain Shaft / Motor 180° Standard															
2*	Double Plain Shaft															
Gear Mounting*																
Size		25	32	50												
0	without	x	x	x												
1	LP050 i = 5	x	x													
2	LP050 i = 10	x	x													
3	LP070 i = 3		x	x												
4	LP070 i = 5		x	x												
5	LP070 i = 10		x	x												

Info: For gears the mounting kit of the motor must be specified.

LP050: A0, A1, A2
LP070: A1, A2, A3






Order Stroke

5 digits input in mm

Mounting Kit for Motor and Gear

Size	25	32	50
0 - without	x	x	x
A 0 SY563T	x	x	
A 1 SY873T	x	x	x
A 2 SMx60 xx xxx 8 11 ...	x	x	
A 3 SMx82 xx xx 8 14 ...		x	x
A 4 SMx100 xx xx 5 19...			x
A 7 PS60		x	x
C 0 LP050 / PV40-TA	x	x	
C 1 LP070 / PV60-TA	x	x	x

Guide Position

0	Standard	
1	180° Standard	
0	Standard	
1	180° Standard	
0	Standard	
1	180° Standard	

External Guide / Carriage Mounting*

0	without
6	PL Proline
E	PS Power Slide 25/25
F	PS Power Slide 25/35, 32/35
G	PS Power Slide 25/44, 32/44
H	PS Power Slide 50/60
I	PS Power Slide 50/76
M	Inversion
R	Compensation
S	Compensation Low Back Lash

Niro

0	Standard
1*	Niro

Accessories - please order separately**Magnetic Sensors ***

0	without
1	1 pc. RST-K 2NO / 5 m Cable
2	1 pc. RST-K 2NC / 5 m Cable
3	2 pc. RST-K 2NC / 5 m Cable
4	2 pc. RST-K 2NC, 1 pc. RST-K 2NO / 5 m Cable
5	1 pc. RST-S 2NO / M8 plug
6	1 pc. RST-S 2NC / M8 plug
7	2 pc. RST-S 2NC / M8 plug
8	2 pc. RST-S 2NC, 1 pc. RST-S 2NO / M8 plug
A	1 pc. EST-S NPN / M8 plug
B	2 pc. EST-S NPN / M8 plug
C	3 pc. EST-S NPN / M8 plug
D	1 pc. EST-S PNP / M8 plug
E	2 pc. EST-S PNP / M8 plug
F	3 pc. EST-S PNP / M8 plug

Profile Mounting *

0	without
1	1 Pair Type E1
2	1 Pair Type D1
3	1 Pair Type MAE
4	2 Pair Type 1
5	2 Pair Type D1
6	2 Pair Type MAE
7	3 Pair Type 1
8	3 Pair Type D1
9	3 Pair Type MAE
K	1 Pair Type E2
L	1 Pair Type E3
M	1 Pair Type E4
N	2 Pair Type E2
P	2 Pair Type E3
Q	2 Pair Type E4
R	3 Pair Type E2
S	3 Pair Type E3
T	3 Pair Type E4

End Cap Mounting *

0	without
1	1 Pair Type A1 (size 25 and 32) or C1 (size 50)
2	1 Pair Type A2 (size 25 and 32) or C2 (size 50)
3	1 Pair Type A3 (size 25 and 32) or C3 (size 50)
4	1 Pair Type B1 (size 25 and 32) or C4 (size 50)
5	1 Pair Type B4 (size 25 and 32)

* Option

Ball Screw Actuator with Internal Plain Bearing Guide for High Accuracy Applications


A high performing, innovative range of actuators which can be integrated into any machine layout neatly and simply.

Advantages

- Accurate Path And Position Control
- High Force Output
- Easy Installation
- Excellent Slow Speed Characteristics
- Ideal for Precise Traverse Operations (e.g. Machine Feeds) and Lifting Applications

Features

- Integrated Drive and Guidance System
- Complete Motor and Control Packages
- Diverse Range of Accessories and Mountings
- Optimal Screw Pitches (5, 10, 25 mm)

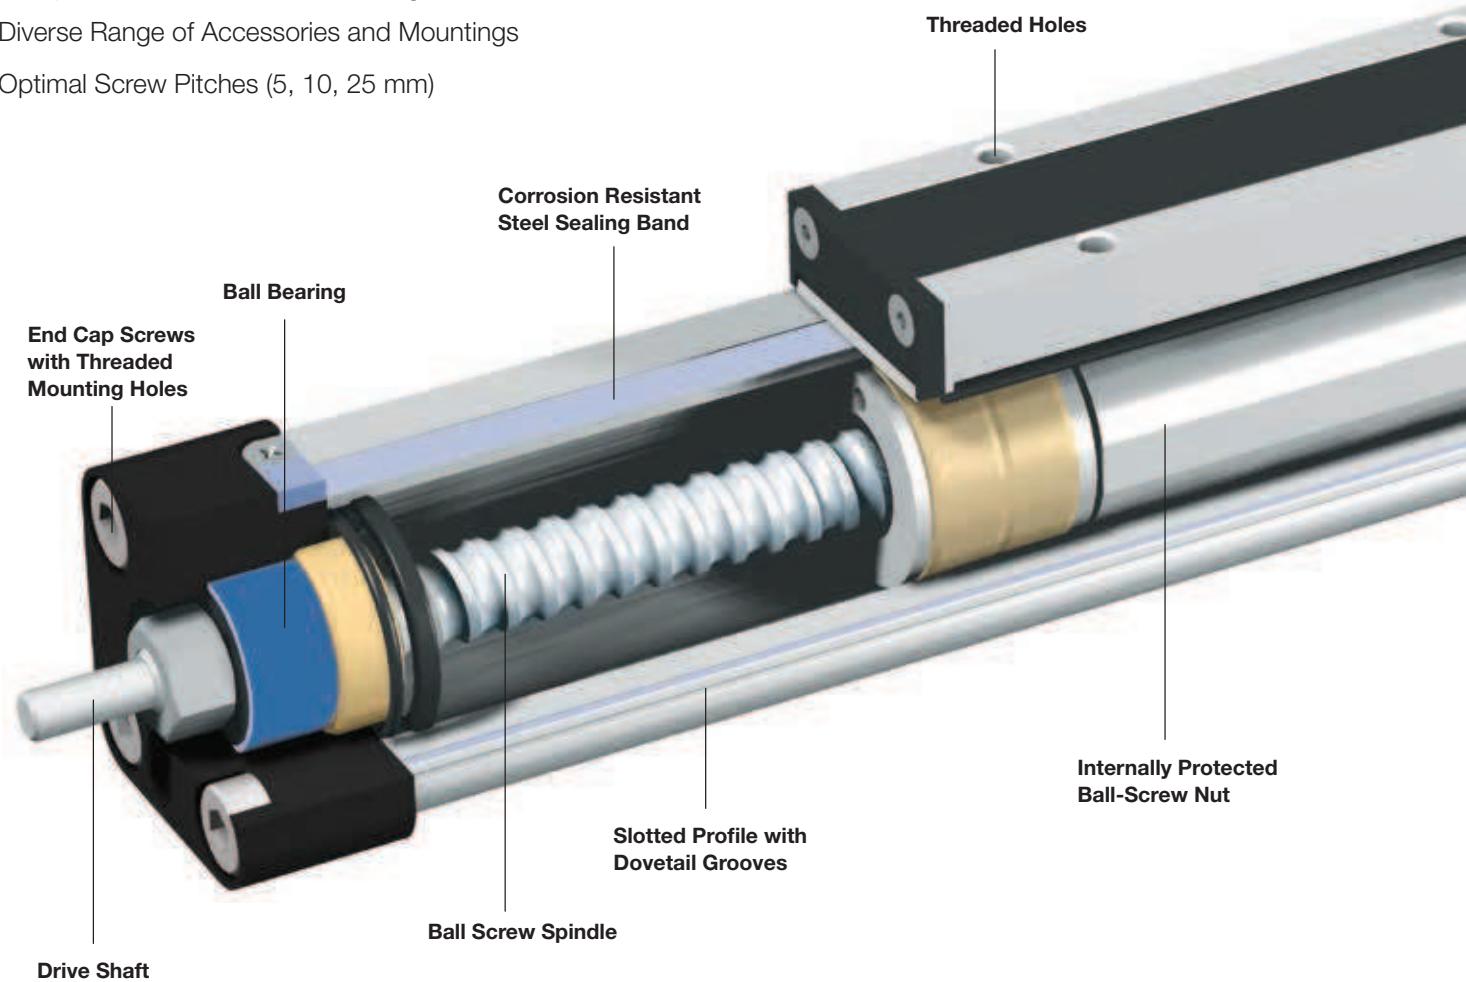


Clean Room-Version
certified to DIN EN ISO 14644-1



Low Friction Support Rings


Carrier

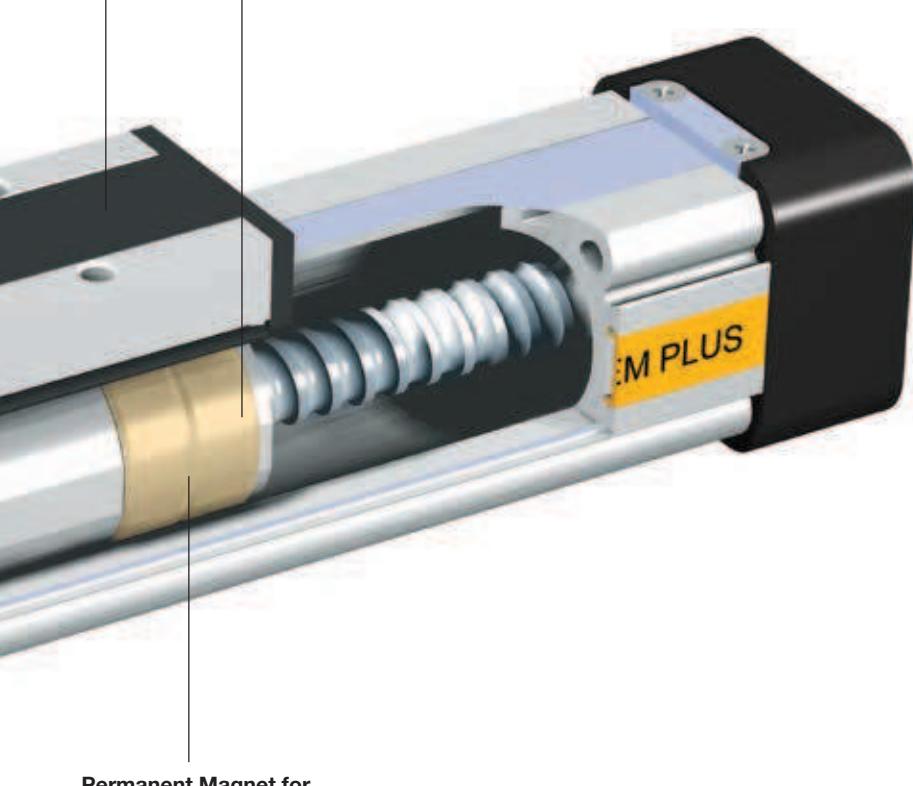

Permanent Magnet for Contactless Sensing

SLIDELINE

Combination with linear guides provides for heavier loads.



POWERSLIDE

Roller bearing precision guidance for smooth travel and high dynamic or static loads.




PROLINE

The compact aluminium roller guide for high loads and velocities.



Heavy Duty guide

HD linear guides for heavy duty applications




SFI-plus

displacement measuring system



The dovetailed mounting rails of the new actuator expand its function into that of a universal system carrier. Modular system components are simply clamped on.



OSP-E..SB


Ball Screw Actuator with internal Plain Bearing Guide

STANDARD VERSION

OSP-E..SB

Standard carrier with internal guidance and integrated magnet set for contactless position sensing.

Dovetail profile for mounting of accessories and the actuator itself.

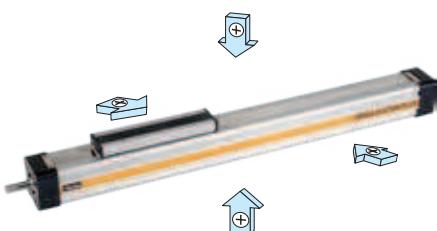

BALL SCREW PITCH

The ball screws spindles are available in various pitches:

OSP-E25SB: 5 mm

OSP-E32SB: 5, 10 mm

OSP-E50SB: 5, 10, 25 mm

ACCESSORIES

MOTOR MOUNTINGS



INVERSION MOUNTING

The inversion mounting, mounted on the carrier, transfers the driving force to the opposite side, e.g. for dirty environments.



OPTIONS

TANDEM

For higher moment support.



CLEAN ROOM

certified to DIN EN ISO 14644-1



END CAP MOUNTING

For end-mounting of the actuator.



PROFILE MOUNTING

For supporting long actuators or mounting the actuator on the dovetail grooves.



MAGNET SENSOR

For contactless position sensing of end stop and intermediate carrier positions.




MEASURING SYSTEM - SFI PLUS

Incremental measuring system with practically relevant resolution.



CLEVIS MOUNTING

Carrier with tolerance and parallelism compensation to drive external linear guides.

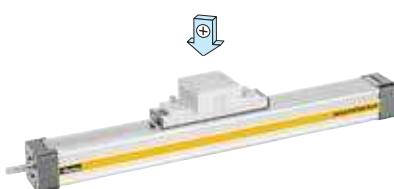

OSP-E..SB Ball Screw Actuator with Internal Plain Bearing Guide



Size 25, 32, 50

Standard Versions:

- Standard Carrier with Internal Plain Bearing Guide
- Dovetail Profile for Mounting of Accessories and the Actuator Itself
- Pitches of Ball Screw Spindle

Type OSP-E25: 5 mm**Type OSP-E32:** 5, 10 mm**Type OSP-E50:** 5, 10, 25 mm

Options:

- Tandem-Version
- Clean room-version, according to DIN EN ISO 14644-1
- Displacement Measuring System SFI-plus

Characteristics

	Symbol	Unit	Description
General Features			
Series			OSP-E..SB
Name			Ball Screw Acutator with Internal Plain Bearing Guide
Mounting			see drawings
Temperature Range	g_{\min} g_{\max}	°C	-20 +80
Installation			in any position
Slotted Profile			Extruded Anodized Aluminium
Ball Screw			Hardened Steel
Ball Screw Nut			Hardened Steel
Guide Bearings			Low Friction Plastic
Sealing Band			Hardened, Corrision Resistant Steel
Screws, Nuts			Zinc Plated Steel
Mountings			Zinc Plated Steel and Aluminium
Protection Class	IP		54

Installation Instructions

Use the threaded holes in the free end cap and a profile mounting close to the motor end for mounting the actuator. At least one end cap must be secured to prevent axial sliding when Profile Mounting is used. When the actuator is moving an externally guided load, the compensation must be used.

The actuators can be fitted with the standard carrier

mounting facing in any direction.

To prevent contamination such as fluid ingress, the actuator should be fitted with its sealing band facing downwards.

The inversion mounting can be fitted to transfer the driving force to the opposite side.

Maintenance

All moving parts are long-term lubricated for a normal operational environment. Parker recommends a check and lubrication of the actuator, and if necessary a change of wear parts, after an operation time of 12 months or 3000 km travel of distance.

Please refer to the operating instructions supplied with the actuator.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the actuator as a machine into service, the user must ensure the adherence to the EC Machine Directive 2006/42/EG.

Weight (mass) and Inertia

Series	Weight (mass) [kg]			Inertia [x 10 ⁻⁶ kgm ²]				
	at stroke 0 m	Add per metre stroke	Moving mass	at stroke 0 m	at stroke 0 m	per kg mass 5 mm* 10 mm* 25 mm*		
OSP-E25SB	0.8	2.3	0.2	2.2	11	0.6	-	-
OSP-E32SB	2.0	4.4	0.4	8.4	32	0.6	2.5	-
OSP-E50SB	5.2	9.4	1.2	84.0	225	0.6	2.5	15.8

*pitch

Sizing Performance Overview Maximum Loadings

Sizing of Actuator


The following steps are recommended for selection :

1. Recommended maximum acceleration is shown in graphs on page 53.
2. Required torque is shown in graphs
3. Check that maximum values in the adjacent charts are not exceeded.
4. When sizing and specifying the motor, the RMS-average torque must be calculated using the cycle time of the application.
5. Check that the maximum allowable unsupported length is not exceeded (see on page 51 ff)

Performance Overview

Characteristics	Unit	Description					
		OSP-E25SB		OSP-E32SB		OSP-E50B	
Size							
Pitch	[mm]	5	5	10	5	10	25
Max. speed	[m/s]	0.25	0.25	0.5	0.25	0.5	1.25
Linear motion per revolution drive shaft	[mm]	5	5	10	5	10	25
Max. rpm. drive shaft	[min ⁻¹]	3000	3000	3000	3000	3000	3000
Max. effective action force F_A corresponding torque on drive shaft	[N] [Nm]	250 0.35	600 0.75	600 1.3	1500 1.7	3.1	7.3
No-load torque	[Nm]	0.2	0.3	0.4	0.6	0.4	0.5
Max. allowable torque on drive shaft	[Nm]	0.6	1.7	2.8	2.0	4.5	9.8
Repeatability	[mm]	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05
Max. Standard stroke length	[mm]	1100	2000	3200			

Forces, Loads and Moments

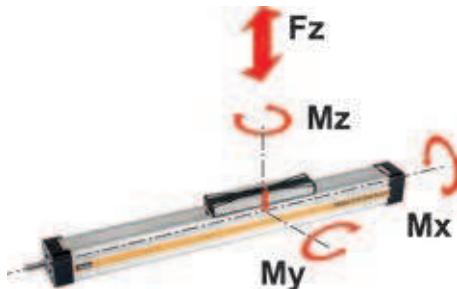

$$M = F \cdot l \text{ [Nm]}$$

$$M_x = M_x \text{ statically} + M_x \text{ dynamically}$$

$$M_y = M_y \text{ statically} + M_y \text{ dynamically}$$

$$M_z = M_z \text{ statically} + M_z \text{ dynamically}$$

The distance l (l_x, l_y, l_z) for calculation of moments relates to the centre axis of the actuator.

Maximum Permissible Loads

Series	Max. applied load [N]	Max. moments [Nm]			
		F_z, F_y	M_x	M_y	M_z
OSP-E25SB	500	2	12	8	
OSP-E32SB	1200	8	25	16	
OSP-E50SB	3000	16	80	32	

Combined Loads

If the actuator is subjected to several forces, loads and moments at the same time, the maximum load is calculated with the equation shown here. The maximum permissible loads must not be exceeded.

Equation of Combined Loads

$$\frac{F_y}{F_y \text{ (max)}} + \frac{F_z}{F_z \text{ (max)}} + \frac{M_x}{M_x \text{ (max)}} + \frac{M_y}{M_y \text{ (max)}} + \frac{M_z}{M_z \text{ (max)}} \leq 1$$

The total of the loads must not exceed >1 under any circumstances.

Maximum Permissible Unsupported Length

Stroke Length

The stroke lengths of the actuators are available in multiples of 1 mm up to above maximum stroke lengths.

OSP-E25SB: max. 1100 mm

OSP-E32SB: max. 2000 mm



OSP-E50SB: max. 3200 mm

Other stroke lengths are available on request.

The end of stroke must not be used as a mechanical stop. Allow an additional safety clearance of minimum 25 mm at both ends.


The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems. For advise, please contact your local Parker technical support department.

Maximum Permissible Unsupported Length – Placing of Profile Mounting

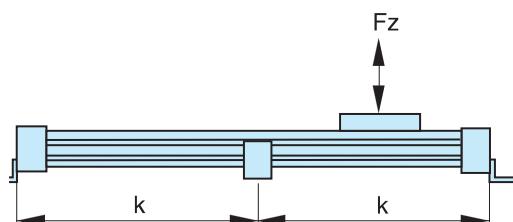

k = Maximum permissible distance between mountings/ mid-section support for a given load F.

Load F [N]

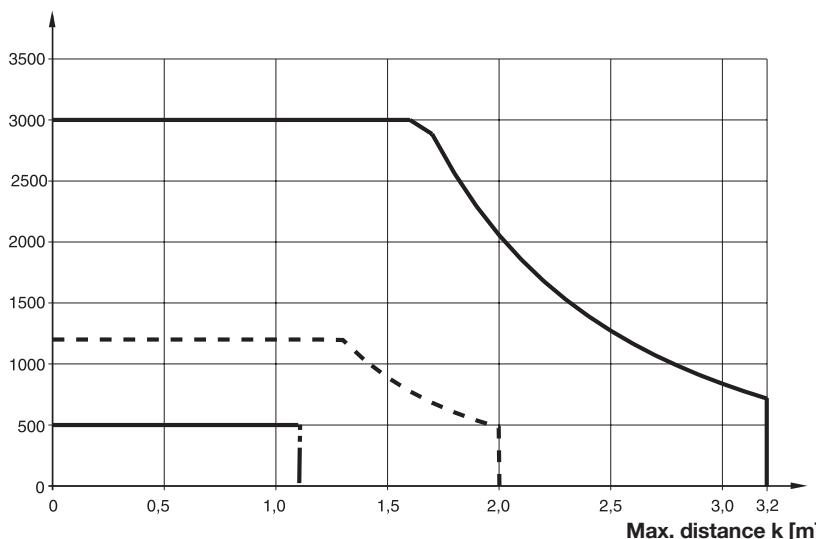


(Up to the curve in the above graph the deflection will be max. 0.2 % of distance k.)

Mounting on the Drive Shaft

Do not expose the drive shaft to uncontrolled axial or radial forces when mounting coupling or pulley, a steady block should be used.

Pulleys


Minimum allowable number of teeth (AT5) and diameter of pulley at maximum applied torque.

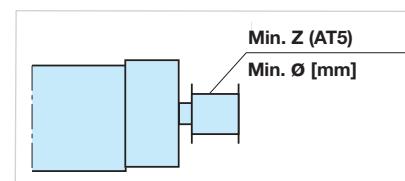

Series	Min. Z	Min Ø
OSP-E25B	24	38
OSP-E32B	24	38
OSP-E50B	36	57

Maximum rpm/Stroke


At longer strokes the speed has to be reduced according to the adjacent graphs.

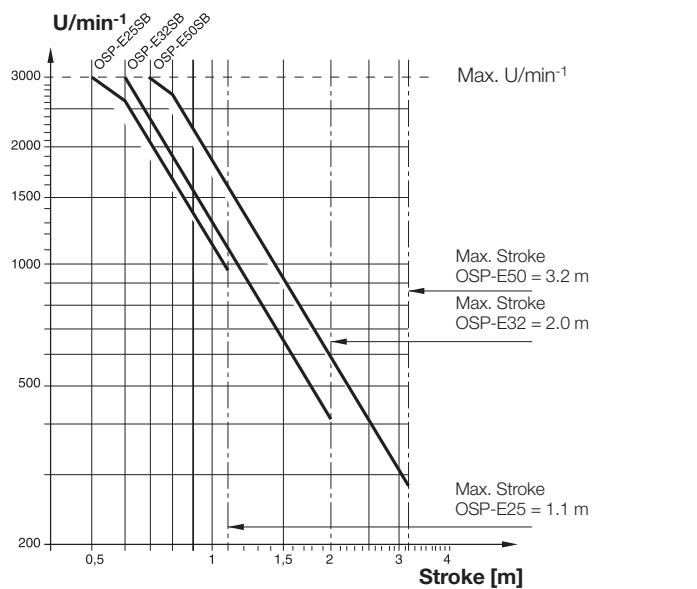

The maximum rpm shown in the graph, is 80% of the critical rpm.


Performance / Action Force

The performance to be expected depends on the maximum required actions force of the application. An increase of the action force will lead to a reduced performance.

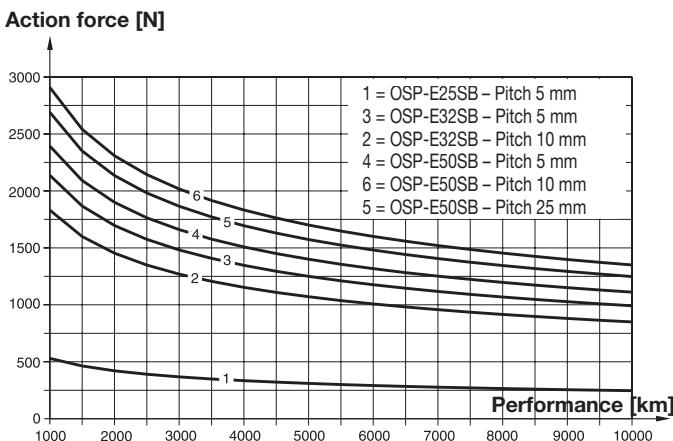

Distance / Time Graph

The adjacent graphs show travel distance and total time at maximum speed and recommended maximum acceleration. The graph assumes that acceleration and deceleration are equal.

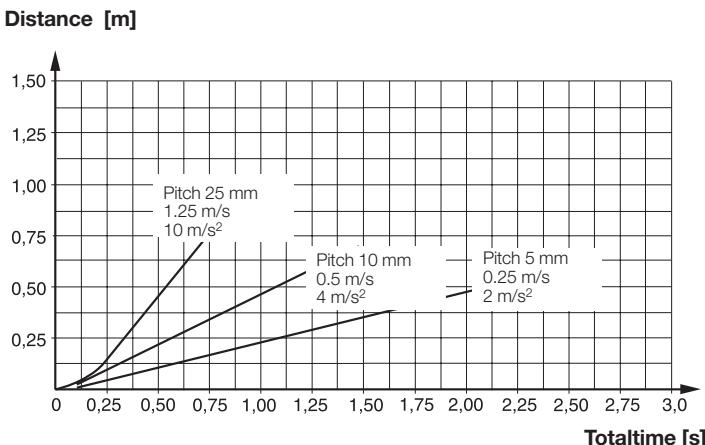


Required Torque / Mass

Using the known mass, the direction of the application and the recommended acceleration, the actuator can be sized and the required torque is shown in the adjacent graphs.


Mass in graphs = Load + moving mass of the actuator according to the weight chart (see table on page 49).

Please mind: If an additional guide is used, mind the weight of the guide carriage.


**Size OSP-E25SB, Pitch 5mm
Acceleration 2 m/s²**

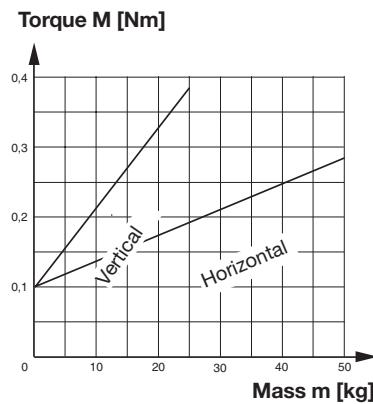


**Size OSP-E32SB, Pitch 5 mm
Acceleration 2 m/s²**

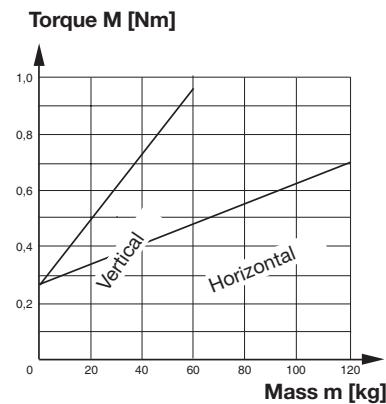


**Size OSP-E32SB, Pitch 10 mm
Acceleration 4 m/s²**

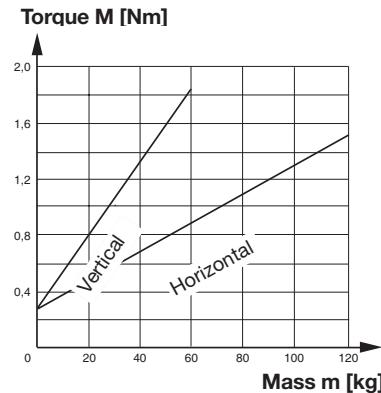


**Size OSP-E50SB, Pitch 5 mm
Acceleration 2 m/s²**

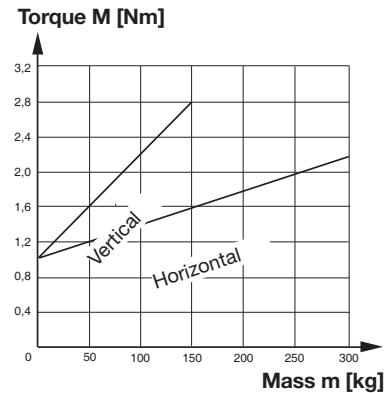

**Size OSP-E50SB, Pitch 10 mm
Acceleration 4 m/s²**



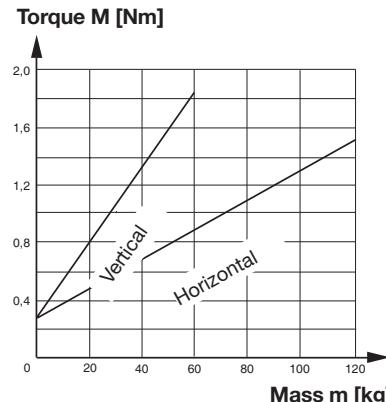


**Size OSP-E50SB, Pitch 25 mm
Acceleration 10 m/s²**

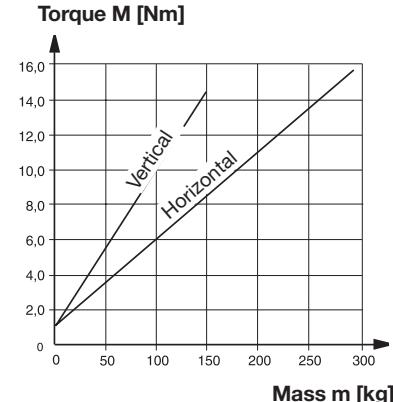

OSP-E..SB**Ball Screw Actuator with Internal Plain Bearing Guide**

Basic Unit

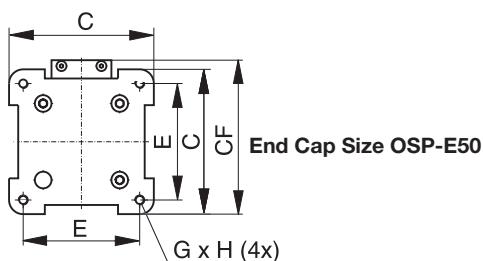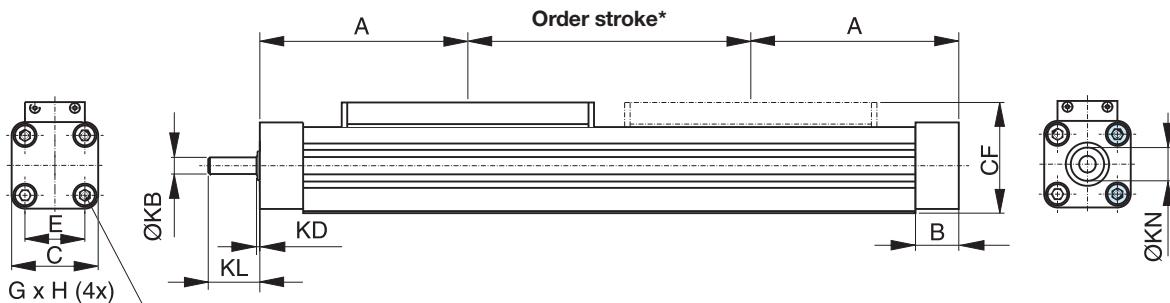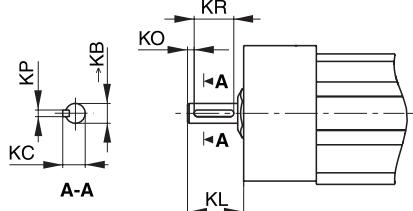**Plain Shaft with Keyway (Option)**


Series	$\varnothing\text{KB}_{h7}$	KC	KL		KO	KP^9	KR
			Opt. 3	Opt. 4			
OSP-E25SB	6	6.8	17	24	2	2	12
OSP-E32SB	10	11.2	31	41	5	3	16
OSP-E50SB	15	17.0	43	58	6	5	28

Option 3: Keyway Option 4: Keyway long version


*** Note:**

The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 25 mm.


Order stroke = required travel + 2 x safety distance. The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems. For further information, please contact your local Parker representative.

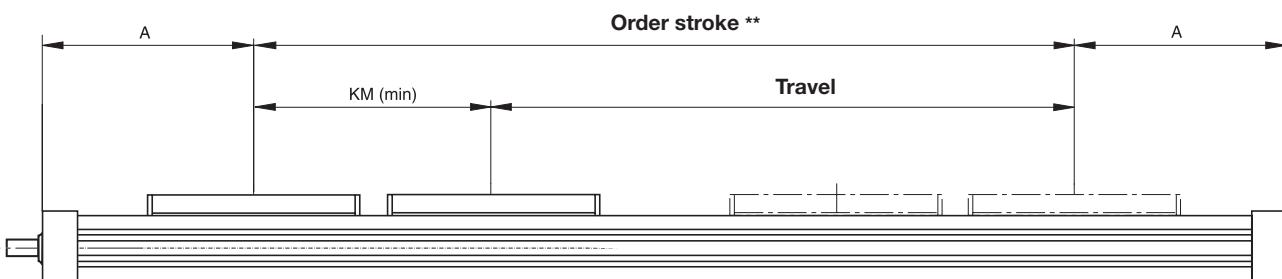Option – Tandem

** Order stroke = required travel + KM min + 2 x safety distance

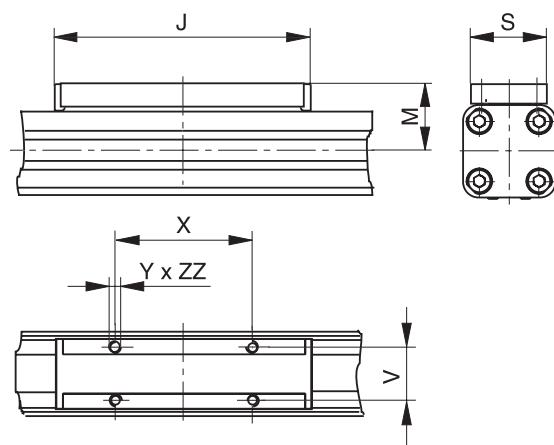Standard Carrier**Dimension table [mm]**

Series	A	B	C	E	G x H	J	K	M	S	V	X	Y	CF	FB	FH	KB	KD	KL	KM _{min}	KN	ZZ
OSP-E25SB	100	22.0	41	27	M5 x 10	117	21.5	31	33	25	65	M5	52.5	40	39.5	6 _{h7}	2	17	120	13	8
OSP-E32SB	125	25.5	52	36	M6 x 12	152	28.5	38	36	27	90	M6	66.5	52	51.7	10 _{h7}	2	31	165	20	10
OSP-E50SB	175	33.0	87	70	M6 x 12	200	43.0	49	36	27	110	M6	92.5	76	77.0	15 _{h7}	3	43	235	28	10

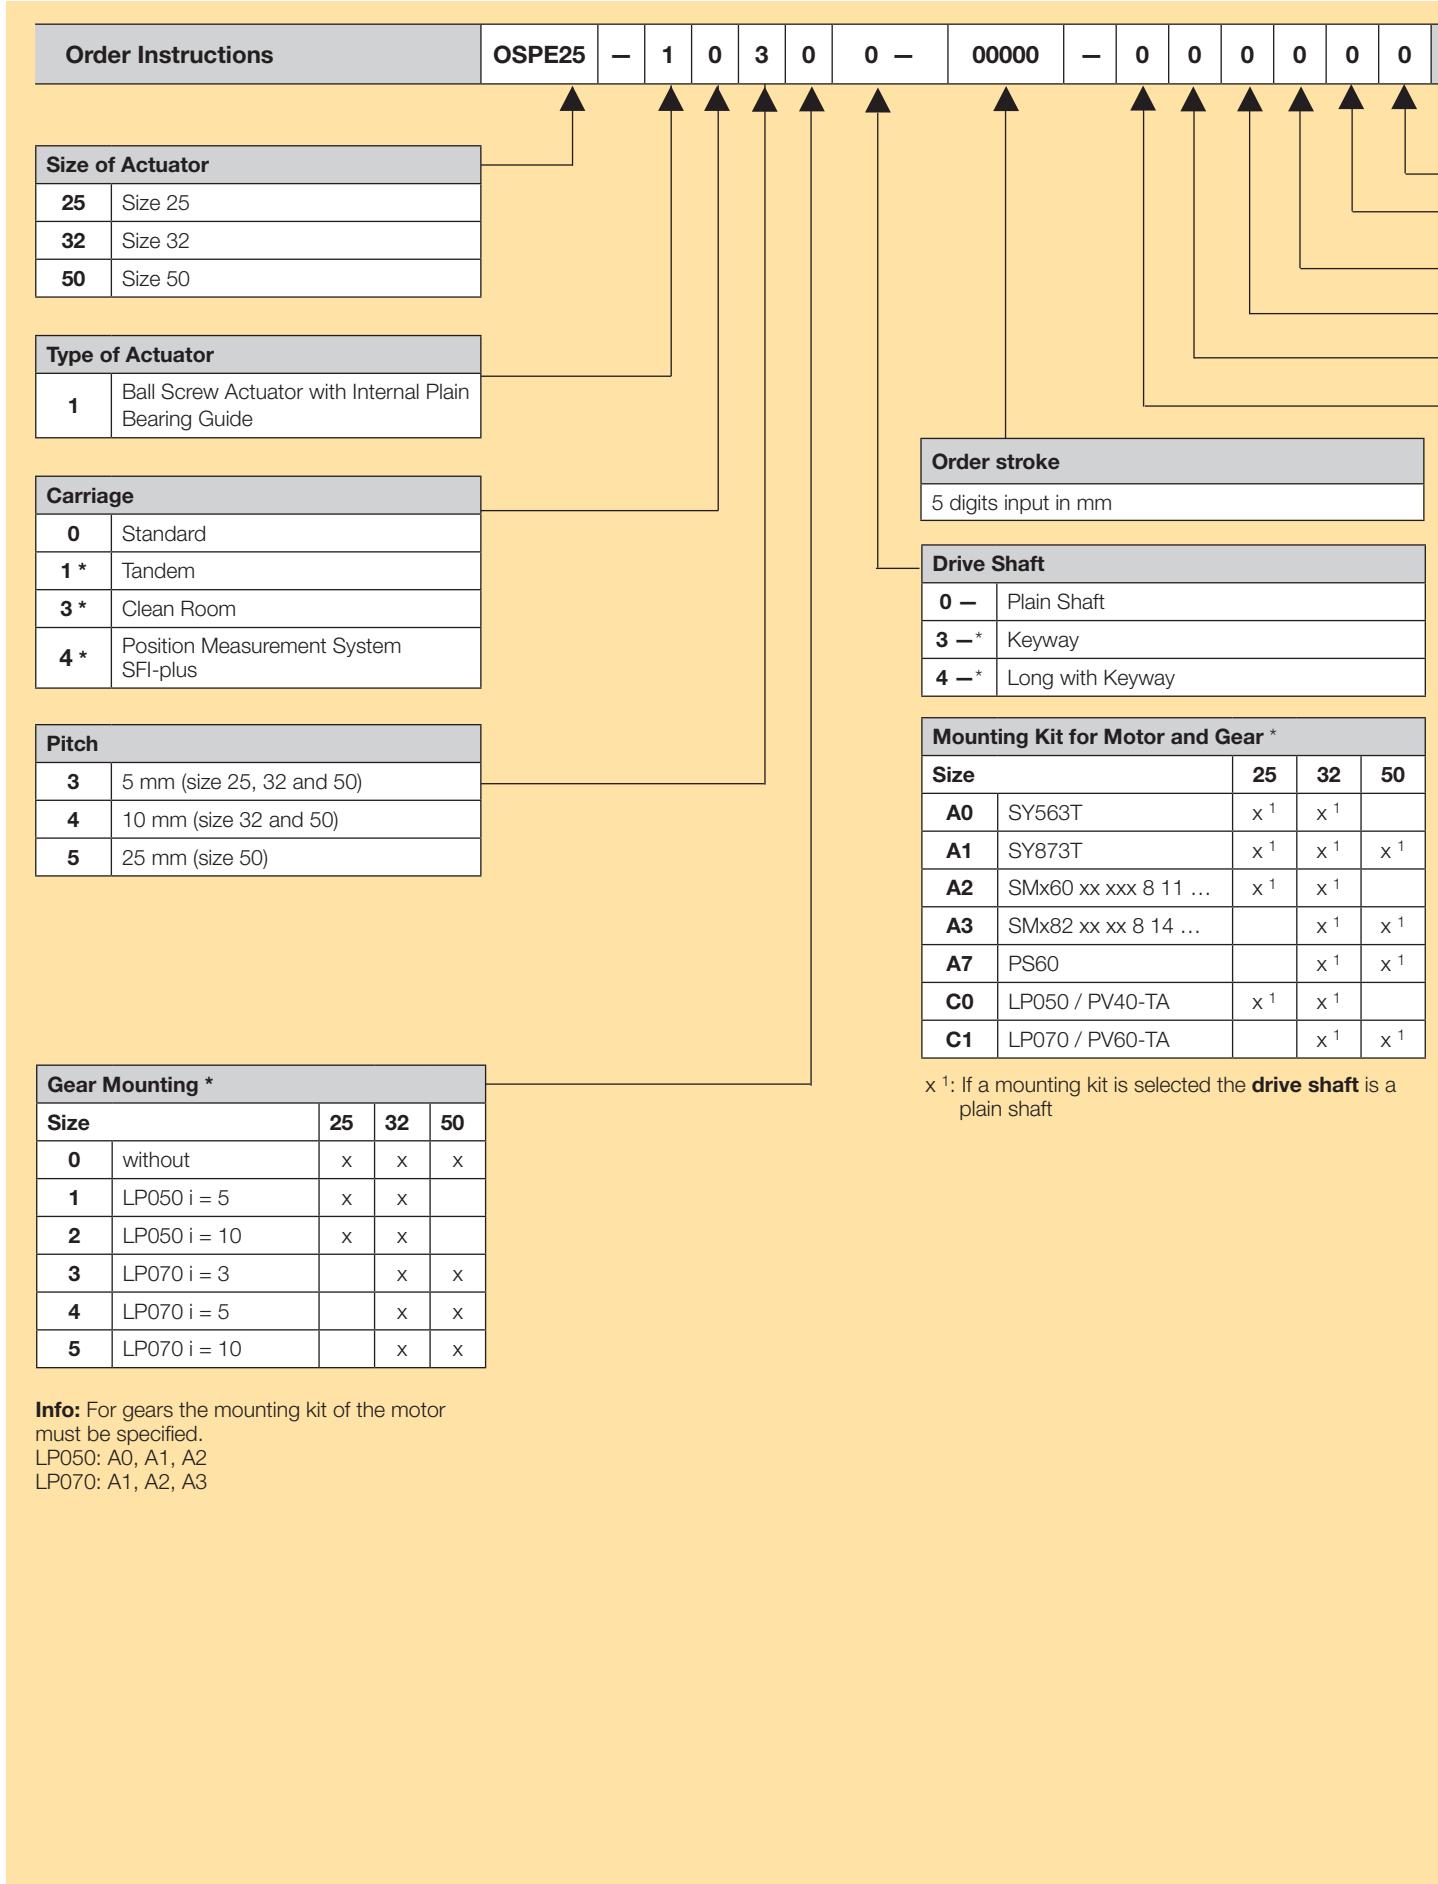

Guide Position

0	Standard
----------	----------

External Guide / Carriage Mounting

0	without
2	SL Slideline
6	PL Proline
D	HD Heavy Duty
E	PS Powerslide 25/25
F	PS Powerslide 25/35, 32/35
G	PS Powerslide 25/44, 32/44
H	PS Powerslide 50/60
I	PS Powerslide 50/76
M	Inversion
R	Compensation
S	Compensation Low Back Lash

Niro

0	Standard
1*	Niro Screw

Accessories - please order separately**Magnetic Sensors ***

0	without
1	1 pc. RST-K 2NO / 5 m Cable
2	1 pc. RST-K 2NC / 5 m Cable
3	2 pc. RST-K 2NC / 5 m Cable
4	2 pc. RST-K 2NC, 1 pc. RST-K 2NO / 5 m Cable
5	1 pc. RST-S 2NO / M8 plug
6	1 pc. RST-S 2NC / M8 plug
7	2 pc. RST-S 2NC / M8 plug
8	2 pc. RST-S 2NC, 1 pc. RST-S 2NO / M8 plug
A	1 pc. EST-S NPN / M8 plug
B	2 pc. EST-S NPN / M8 plug
C	3 pc. EST-S NPN / M8 plug
D	1 pc. EST-S PNP / M8 plug
E	2 pc. EST-S PNP / M8 plug
F	3 pc. EST-S PNP / M8 plug

Profile Mounting *

0	without
1	1 Pair Type 1
2	1 Pair Type D1
3	1 Pair Type MAE
4	2 Pair Type 1
5	2 Pair Type D1
6	2 Pair Type MAE
7	3 Pair Type 1
8	3 Pair Type D1
9	3 Pair Type MAE
K	1 Pair Type E2
L	1 Pair Type E3
M	1 Pair Type E4
N	2 Pair Type E2
P	2 Pair Type E3
Q	2 Pair Type E4
R	3 Pair Type E2
S	3 Pair Type E3
T	3 Pair Type E4

End Cap Mounting *

0	without
1	1 pc. Type A1 (size 25 and 32) or C1 (size 50)
2	1 pc. Type A2 (size 25 and 32) or C2 (size 50)
3	1 pc. Type A3 (size 25 and 32) or C3 (size 50)
4	1 pc. Type B1 (size 25 and 32) or C4 (size 50)
5	1 pc. Type B4 (size 25 and 32)

* Option

Trapezoidal Screw Actuator with Internal Plain Bearing Guide for Intermittent Applications


A high performing, innovative range of actuators which can be integrated into any machine layout neatly and simply.


Advantages

- Accurate Path and Position Control
- High Force Output
- Self-Locking
- Excellent Slow Speed Characteristics
- Easy Installation
- Low Maintenance
- Ideal for Level Regulation, Lifting and Other Applications with Intermittent Operations


Features

- Integrated Drive and Guidance System
- Complete Motor and Control Packages
- Diverse Range of Accessories and Mountings
- Special Options Available

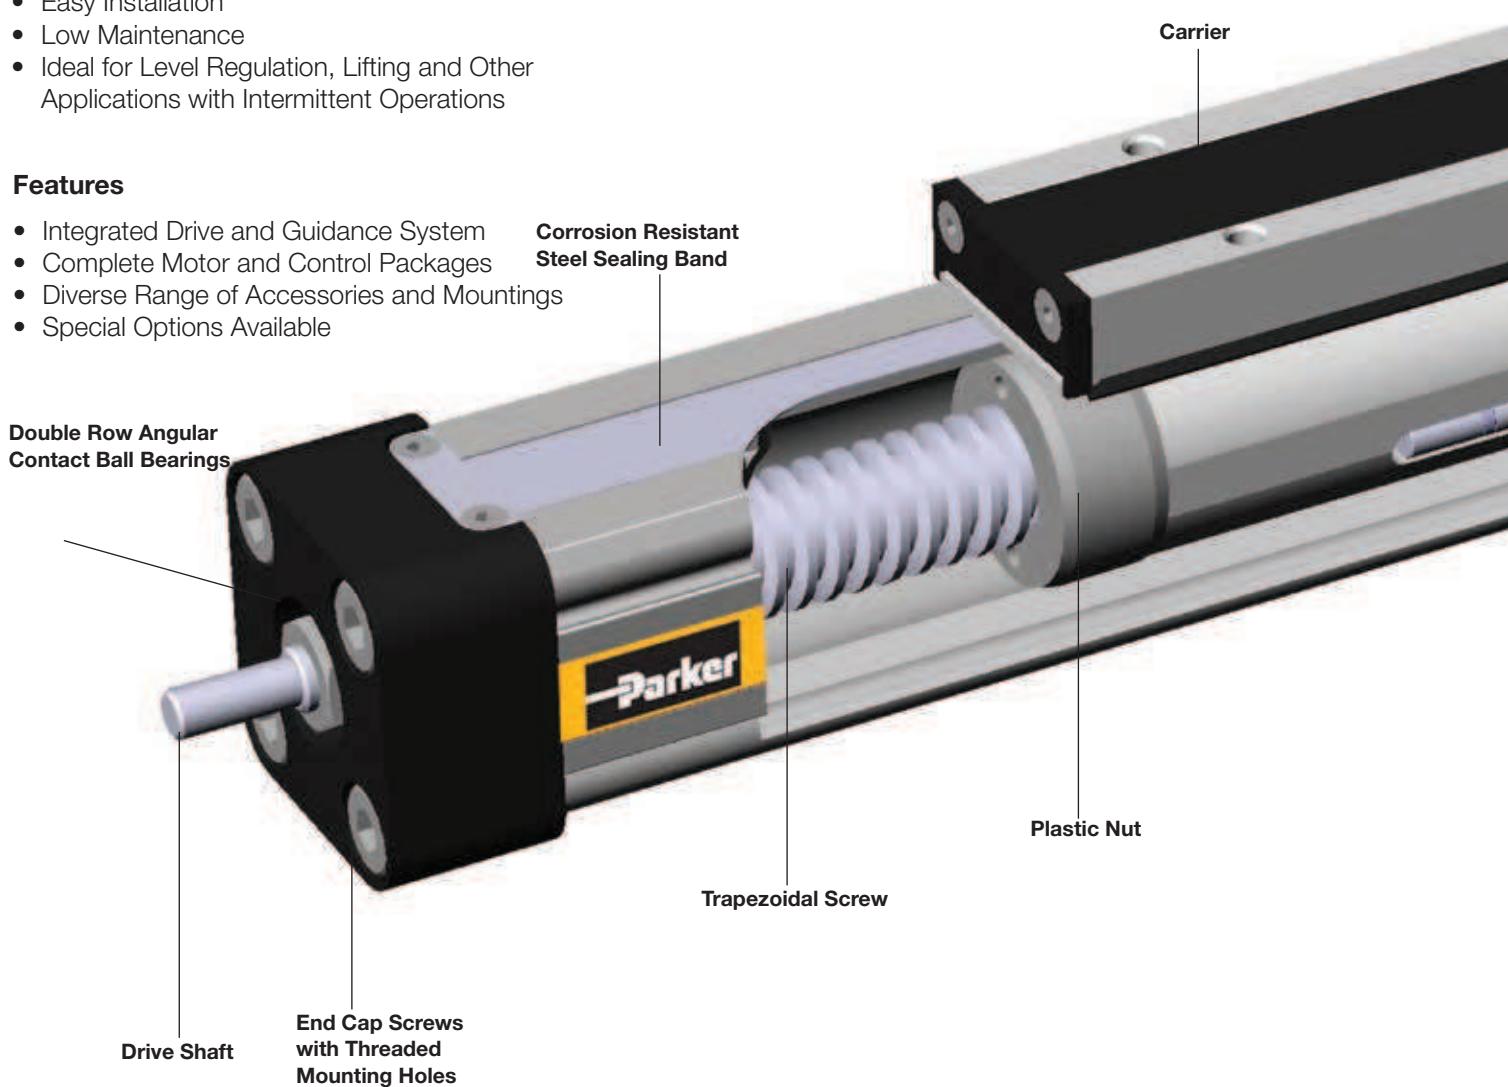

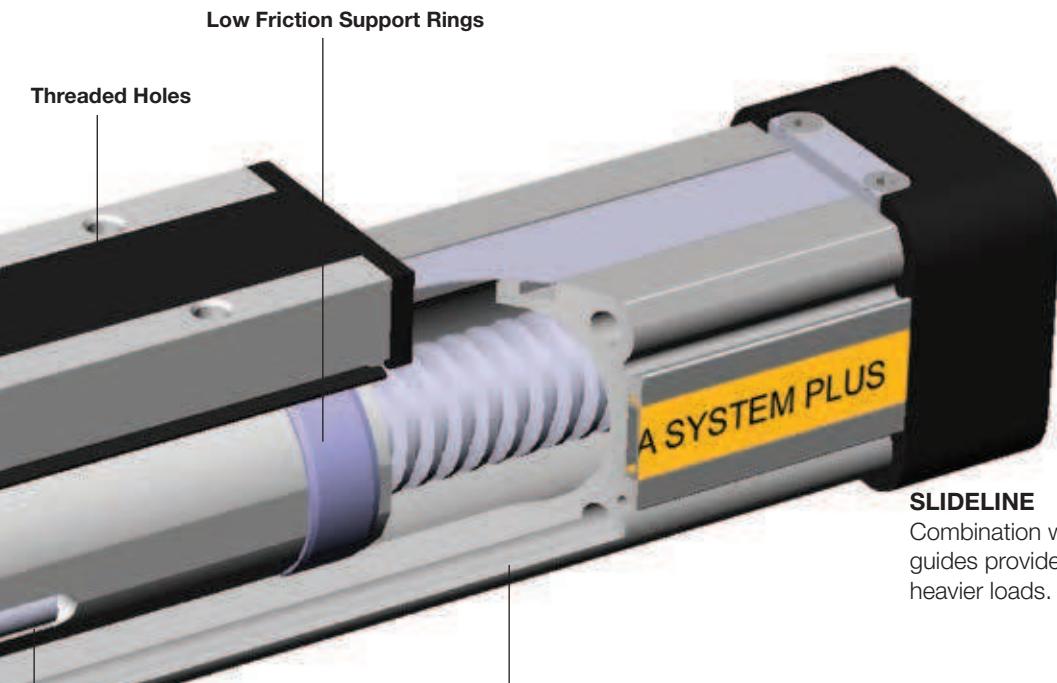**SLIDELINE**

Combination with linear guides provides for heavier loads.

**POWERSLIDE**


Roller bearing precision guidance for smooth travel and high dynamic or static loads.

**PROLINE**


The compact aluminium roller guide for high loads and velocities.

**Heavy Duty guide**

HD linear guides for heavy duty applications

**SFI-plus**

displacement measuring system




The dovetailed mounting rails of the new acutator expand its function into that of a universal system carrier.

Modular system components are simply clamped on.

OSP-E..ST**Trapezoidal Screw Actuator with Internal Plain Bearing Guide****STANDARD VERSIONS****OSP-E..ST**

Standard carrier with internal guidance and integrated magnet set for contactless position sensing. Dovetail profile for mounting of accessories and the actuator itself.

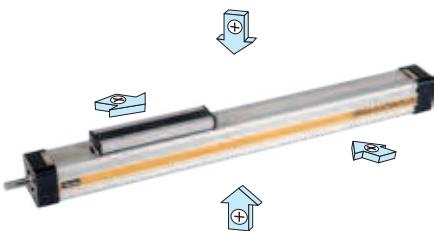**ACCESSORIES****MOTOR MOUNTINGS****INVERSION MOUNTING**

The inversion mounting, mounted on the carrier, transfers the driving force to the opposite side, e.g. for dirty environments.

**END CAP MOUNTING**

For end-mounting of the actuator

**MAGNETIC SENSORS SERIES RST AND EST**

For contactless position sensing of end stop and intermediate carrier positions.

**PROFILE MOUNTING**


For supporting long actuators or mounting the actuator on the dovetail grooves.

**MEASURING SYSTEM - SFI PLUS**

Incremental measuring system with practically relevant resolution.

**CLEVIS MOUNTING**

Carrier with tolerance and parallelism compensation to drive external linear guides.

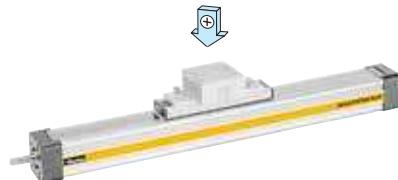

OSP-E..ST

Trapezoidal Screw Actuator with Internal Plain Bearing Guide

Size 25, 32, 50

Standard Version

- Standard Carrier with Internal Plain Bearing Guide
- Dovetail Profile for Mounting of Accessories and the Actuator itself
- Pitch of Trapezoidal Spindle:
Type OSP-E25ST: 4 mm
Type OSP-E32ST: 4 mm
Type OSP-E50ST: 6 mm



Options

- Displacement Measuring System SFI-plus
- Keyway

Characteristics

	Symbol	Unit	Description
General Features			
Series			OSP-E..ST
Name			Trapezoidal Screw Actuator with Internal Plain Bearing Guide
Mounting			see drawings
Temperature Range	ϑ_{\min} ϑ_{\max}	°C	-20 +70
Installation			in any position
Slotted Profile			Extruded Anodized Aluminium
Trapezoidal Screw			Cold Rolled Steel
Drive Nut			Thermoplastic Polyester
Material			Guide Bearings
			Low Friction Plastic
			Sealing Band
			Hardened, corrosion resistant steel
			Screws, Nuts
			Zinc Plated Steel
			Mountings
			Zinc Plated Steel and Aluminium
Protection Class	IP		54

Weight (mass) and Inertia

Series	Weight (mass) [kg]			Inertia [$\times 10^{-6}$ kgm ²]		
	at stroke 0 m	add per metre stroke	moving mass	at stroke 0 m	add per metre	per kg mass
OSP-E25ST	0.9	2.8	0.2	6.0	30	0.4
OSP-E32ST	2.1	5.0	0.5	21.7	81	0.4
OSP-E50ST	5.1	10.6	1.3	152.0	400	0.9

Installation Instructions

Use the threaded holes in the free end cap and a profile mounting close to the motor end for mounting the actuator. See if profile mountings are needed using the maximum permissible unsupported length graph on page 65. At least one end cap must be secured to prevent axial sliding when Profile Mounting is used. When the actuator is moving an externally guided load, the compensation must be used. The actuators can be fitted with the standard carrier mounting facing in any direction. To prevent contamination such as fluid ingress, the drive should be fitted with its sealing band facing downwards. The inversion mounting can be fitted to transfer the driving force to the opposite side.

Maintenance

All moving parts are long-term lubricated for a normal operational environment. Parker recommends a check and lubrication of the actuator, and if necessary a change of wear parts, after an operation time of 12 months or 300 km travel of distance. Please refer to the operating instructions supplied with the drive.

First service start-up

The maximum values specified in the technical data sheet for the different products must not be exceeded. Before taking the actuator as a machine into service, the user must ensure the adherence to the EC Machine Directive 2006/42/EG.

Sizing, Performance Overview, Maximum Loading

Sizing of Actuator

The following steps are recommended for selection :

1. Check that maximum values in the table T3 are not exceeded.

2. Check the maximum values in graph on page 72 ff are not exceeded.

3. When sizing and specifying the motor, the RMS-average torque must be calculated using the cycle time of the application.

4. Check that the maximum allowable unsupported length is not exceeded (see on page 73 ff).


Performance Overview

Characteristics	Unit	Description		
		OSP-E25ST	OSP-E32ST	OSP-E50ST
Size				
Pitch	[mm]	4	4	6
Max. Speed	[m/s]	0.1	0.1	0.15
Linear Motion per Revolution Drive Shaft	[mm]	4	4	6
Max. rpm. Drive Shaft	[min ⁻¹]	1,500	1,500	1,500
Max. Effective Action Force F_A Corresponding Torque on Drive Shaft	[N] [Nm]	600 1.35	1,300 3.2	2,500 8.8
No-load Torque	[Nm]	0.3	0.4	0.5
Max. Allowable Torque on Drive Shaft	[Nm]	1.55	4.0	9.4
Self-locking Force F_L ¹⁾	[N]	600	1,300	2,500
Repeatability	[mm]	±0.05	±0.05	±0.05
Max. Standard Stroke Length	[mm]	1,100	2,000	2,500*

1) Related to screw Type s Tr 16x4. Tr 20x4. TR 30x6 see page 71 ff – for inertia.

* For strokes longer than 2,000 mm in horizontal applications. please contact our customer support.

Forces, Loads and Moments

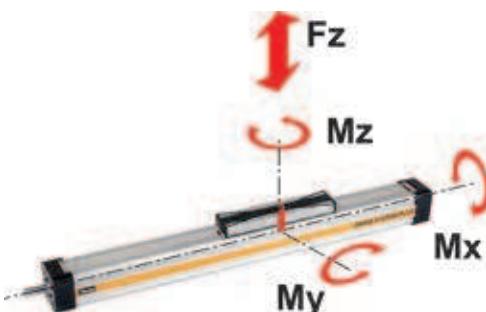

$$M = F \cdot l \text{ [Nm]}$$

$$M_x = M_{x \text{ static}} + M_{x \text{ dynamic}}$$

$$M_y = M_{y \text{ static}} + M_{y \text{ dynamic}}$$

$$M_z = M_{z \text{ static}} + M_{z \text{ dynamic}}$$

The distance l (l_x, l_y, l_z) for calculation of the bending moments relates to the centre axis of the actuator.

Combined Loads

If the actuator is subjected to several forces, loads and moments at the same time, the maximum load is calculated with the equation shown here.

The maximum permissible loads must not be exceeded.

Stroke Length

The stroke lengths of the actuators are available in multiples of 1 mm up to the following maximum stroke lengths.

OSP-E25ST: max. 1100 mm

OSP-E32ST: max. 2000 mm

OSP-E50ST: max. 2500 mm *

Other stroke lengths are available on request.

* For strokes longer than 2000 mm in horizontal applications, please contact our customer support

Maximal Permissible Loads

Size	Max. applied load [N]	Max. moments [Nm]		
		F_z, F_y	M_x	M_y
OSP-E25ST	500	2	24	7
OSP-E32ST	1000	6	65	12
OSP-E50ST	1500	13	155	26

Equation of Combined Loads



$$\frac{F_y}{F_y \text{ (max)}} + \frac{F_z}{F_z \text{ (max)}} + \frac{M_x}{M_x \text{ (max)}} + \frac{M_y}{M_y \text{ (max)}} + \frac{M_z}{M_z \text{ (max)}} \leq 1$$

The end of stroke must not be used as a mechanical stop. Allow an additional safety clearance of minimum


25 mm at both ends. The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems. For advise, please contact your local Parker technical support department.

Maximum Permissible Unsupported Length

Maximum Permissible Unsupported Length – Placing of Profile Mounting

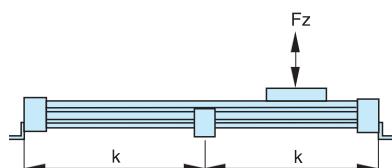

k = Maximum permissible distance between mountings/mid-section support for a given load F.

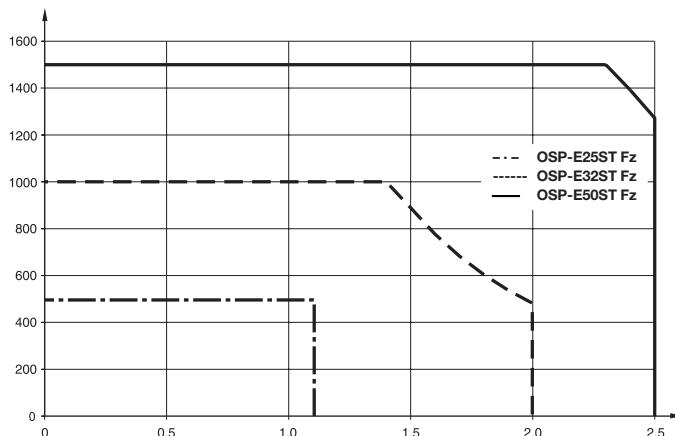


Mounting on the Drive Shaft

Do not expose the drive shaft to uncontrolled axial or radial forces when mounting coupling or pulley, a steady block should be used.

Pulleys


Minimum allowable number of teeth (AT5) and diameter of pulley at maximum applied torque.

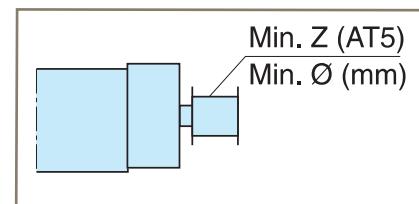

Series	Min. Z	Min Ø
OSP-E25ST	24	38
OSP-E32ST	24	38
OSP-E50ST	36	57

Maximum rpm / Stroke


At longer strokes the speed has to be reduced according to the adjacent graphs.

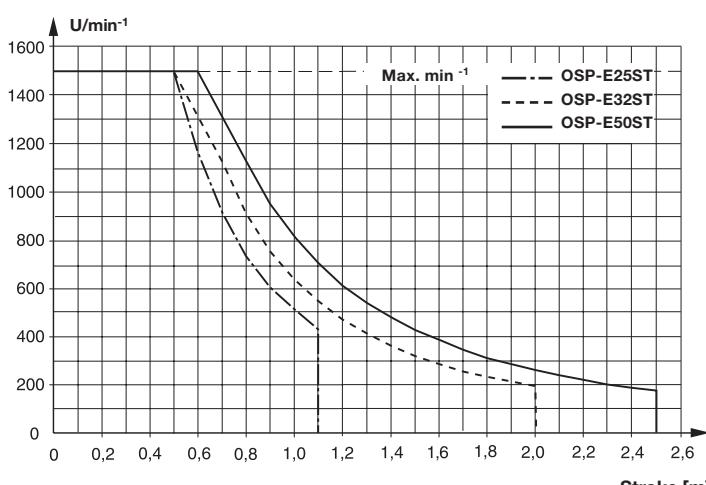

(Up to the curve in the above graph the deflection will be max. 0.2 % of distance k.)

Performance as a Function of the Action Force

The actuators are designed for a 10 % intermittent usage. The performance to be expected depends on the maximum required actions force of the application. An increase of the action force will lead to a reduced performance.

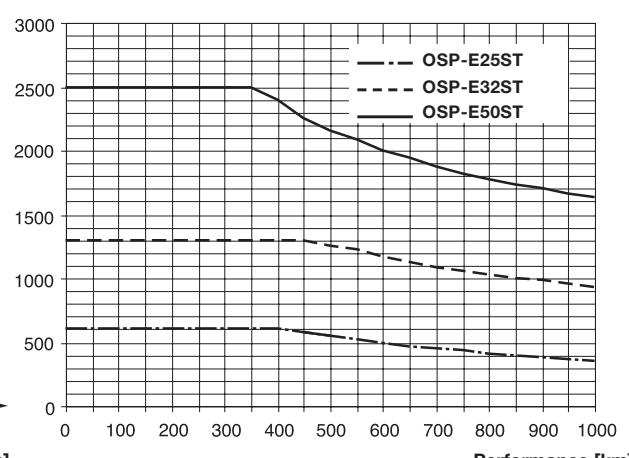


Note: Graph above is based upon 10% intermittent usage.


OSP-E..ST

Trapezoidal Screw Actuator with Internal Plain Bearing Guide

Basic Unit

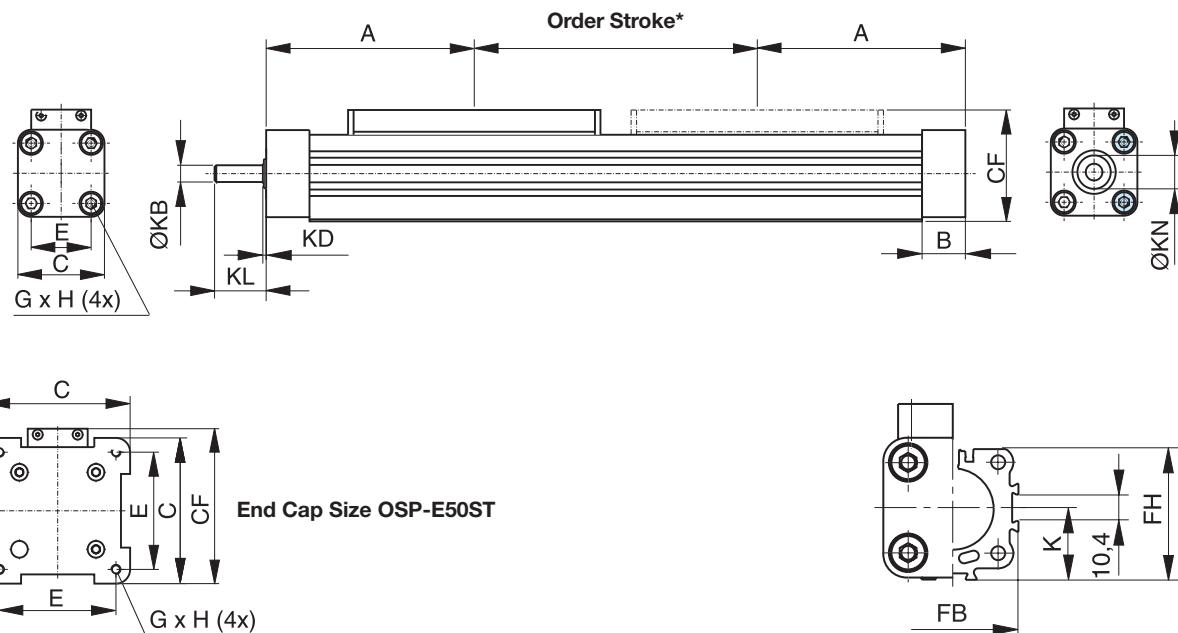

Plain Shaft with Keyway (Option)

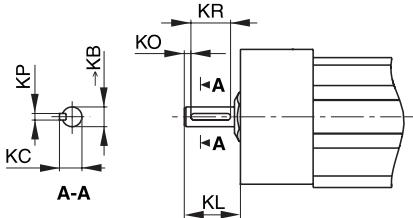

Dimension [mm]

Series	ØKB _{h7}	KC	KL	KP	KO	KP ^{P9}	KR
				Opt. 3	Opt. 4		
OSP-E25ST	6	6.8	17	24	2	2	12
OSP-E32ST	10	11.2	31	41	5	3	16
OSP-E50ST	15	17.0	43	58	6	5	28

Option 3: Passfedernt Option 4: Passfedernt lang


* Note:

The mechanical end position must not be used as a mechanical end stop. Allow an additional safety clearance at both ends equivalent to the linear movement of one revolution of the drive shaft, but at least 25 mm.

Order stroke = required travel + 2 x safety distance.

The use of an AC motor with frequency converter normally requires a larger safety clearance than that required for servo systems.

For further information, please contact your local Parker representative..

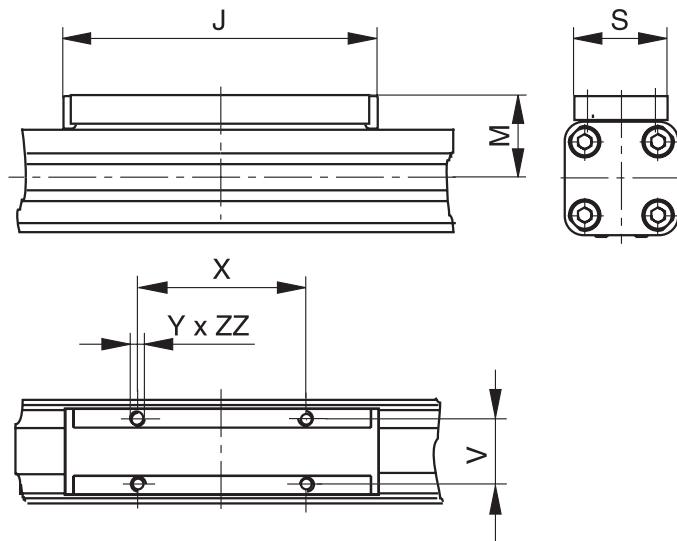Standard Carrier**Dimension Table [mm]**

Series	A	B	C	E	G x H	J	K	M	S	V	X	Y	CF	FB	FH	KB	KD	KL	KN	ZZ
OSP-E25ST	100	22.0	41	27	M5 x 10	117	21.5	31	33	25	65	M5	52.5	40	39.5	6 _{h7}	2	17	13	8
OSP-E32ST	125	25.5	52	36	M6 x 12	152	28.5	38	36	27	90	M6	66.5	52	51.7	10 _{h7}	2	31	20	10
OSP-E50ST	175	33.0	87	70	M6 x 12	200	43.0	49	36	27	110	M6	92.5	76	77.0	15 _{h7}	3	43	28	10

Order Instructions				OSPE25	-	2	0	4	0	0-	00000	-	0	0	0	0	0	
Size of Drive																		
25 Size 25																		
32 Size 32																		
50 Size 50																		
Type of Drive																		
2 Trapezoidal Screw Actuator with Internal Plain Bearing Guide																		
Carriage													Order Stroke					
0 Standard											5 digits input in mm							
4 Position Measurement System SFI-plus *																		
Pitch													Drive Shaft					
4 4 mm (for size 25 and 32)											0 - Plain Shaft							
6 6 mm (for size 50)											3 - * Keyway							
										4 - * Long with Keyway								
Gear Mounting *													Mounting Kit for Motor and Gear *					
Size		25	32	50										25	32	50		
0 without		x	x	x										x ¹	x ¹			
1 LP050 i = 5		x	x											x ¹	x ¹	x ¹		
2 LP050 i = 10		x	x											x ¹	x ¹			
3 LP070 i = 3			x	x										x ¹		x ¹		
4 LP070 i = 5			x	x											x ¹	x ¹		
5 LP070 i = 10			x	x											x ¹	x ¹		

x¹: If a mounting kit is selected the **drive shaft** is a plain shaft

Info: For gears the mounting kit of the motor must be specified.

LP050: A0, A1, A2

LP070: A1, A2, A3

Guide Position

0	Standard
----------	----------

External Guide / Carriage Mounting

0	without
2	SL Slide Line
6	PL Proline
D	HD Heavy Duty
E	PS Power Slide 25/25
F	PS Power Slide 25/35, 32/35
G	PS Power Slide 25/44, 32/44
H	PS Power Slide 50/60
I	PS Power Slide 50/76
M	Inversion
R	Compensation
S	Compensation Low Back Lash

Niro

0	Standard
1 *	Niro Screws

* Option

Accessories - please order separately

* Option

Magnetic Sensors *

0	without
1	1 pc. RST-K 2NO / 5 m cable
2	1 pc. RST-K 2NC / 5 m cable
3	2 pc. RST-K 2NC / 5 m cable
4	2 pc. RST-K 2NC, 1 pc. RST-K 2NO / 5 m cable
5	1 pc. RST-S 2NO / M8 plug
6	1 pc. RST-S 2NC / M8 plug
7	2 pc. RST-S 2NC / M8 plug
8	2 pc. RST-S 2NC, 1 pc. RST-S 2NO / M8 plug
A	1 pc. EST-S NPN / M8 plug
B	2 pc. EST-S NPN / M8 plug
C	3 pc. EST-S NPN / M8 plug
D	1 pc. EST-S PNP / M8 plug
E	2 pc. EST-S PNP / M8 plug
F	3 pc. EST-S PNP / M8 plug

Profile Mounting *

0	without
1	1 Pair Type 1
2	1 Pair Type D1
3	1 Pair Type MAE
4	2 Pair Type 1
5	2 Pair Type D1
6	2 Pair Type MAE
7	3 Pair Type 1
8	3 Pair Type D1
9	3 Pair Type MAE
K	1 Pair Type E2
L	1 Pair Type E3
M	1 Pair Type E4
N	2 Pair Type E2
P	2 Pair Type E3
Q	2 Pair Type E4
R	3 Pair Type E2
S	3 Pair Type E3
T	3 Pair Type E4

End Cap Mounting *

0	without
1	1 pc. Type A1 (size 25 and 32) or C1 (size 50)
2	1 pc. Type A2 (size 25 and 32) or C2 (size 50)
3	1 pc. Type A3 (size 25 and 32) or C3 (size 50)
4	1 pc. Type B1 (size 25 and 32) or C4 (size 50)
5	1 pc. Type B4 (size 25 and 32)

Adaptive Modular System

The Origa System Plus – OSP – provides a comprehensive range of linear guides for the pneumatic and electric actuators.

Versions:

Electric Acutator Series:

- **OSP-E..B**
- **OSP-E..SB**
- **OSP-E..ST**
- **Sizes** 25, 32, 50

Advantages:

- Takes High Loads and Moments
- High Precision
- Smooth Operation
- Can be Retrofitted
- Can be Installed in any Position

Electric Acutator

- **Series OSP-E..B** (Belt)
- **Series OSP-E..SB** (Ball Screw)
- **Series OSP-E..ST** (Trapezoidal Screw)




SLIDELINE

The cost-effective plain bearing guide for medium loads.
– for screw actuators only Series OSP-E..SB, OSP-E..ST




POWERSLIDE

The roller guide for heavy loads.

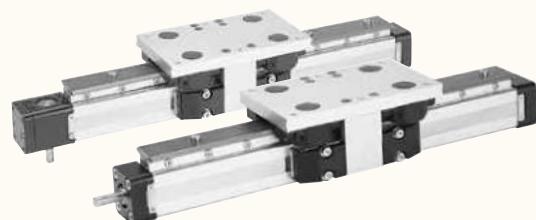

PROLINE


The ball bushing guide for heavy loads and speed.

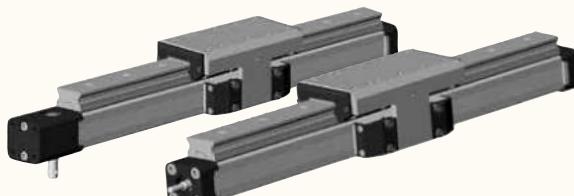

HD-Guide (heavy-duty guide)

The ball bearing guide for the heaviest loads and greatest accuracy.

– for Screw Actuators only Series OSP-E..SB, OSP-E..ST

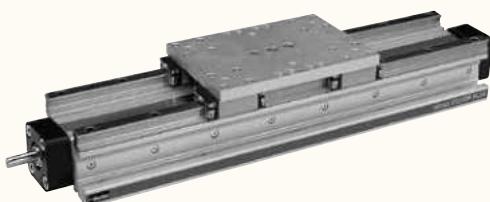

SLIDELINE Plain Bearing Guide

Series SL 25 to 50 for for Actuator

- Series OSP-E Screw

Technical Data

The table shows the maximum permissible values for smooth operation, which must not be exceeded even under dynamic conditions.


The load and moment figures apply to speeds $v < 0.2$ m/s.

Features


- Anodised Aluminium Guide Rail with Prism-Shaped Slideway Arrangement
- Adjustable Plastic Slide Elements
- Composite Sealing System with Plastic and Felt Wiper Elements to Remove Dirt and Lubricate the Slideways.
- Corrosion-resistant Version Available on request.

Versions

– for Electric Acutator:
Series OSP-E Screw

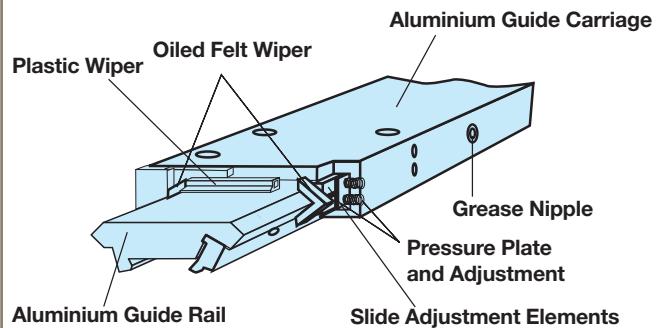

Loads, Forces and Moments

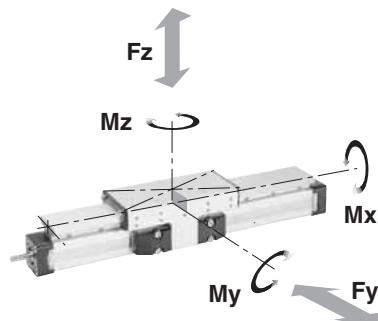


Series	Max. Moments [Nm]			Max. Load [N]	Mass of Drive with Guide [kg]	Weight Carriage [kg]	Order No. SLIDELINE ¹⁾ without break for OSP-E Screw
	M_x	M_y	M_z	F	0 mm Stroke OSP-E Screw	per 100 mm Stroke OSP-E Screw	
SL25	14	34	34	675	1.8	0.42	0.61
SL32	29	60	60	925	3.6	0.73	0.95
SL50	77	180	180	2,000	8.7	1.44	2.06

¹⁾ Corrosion resistant fixtures available on request

Dimensions

Series OSP-E Screw

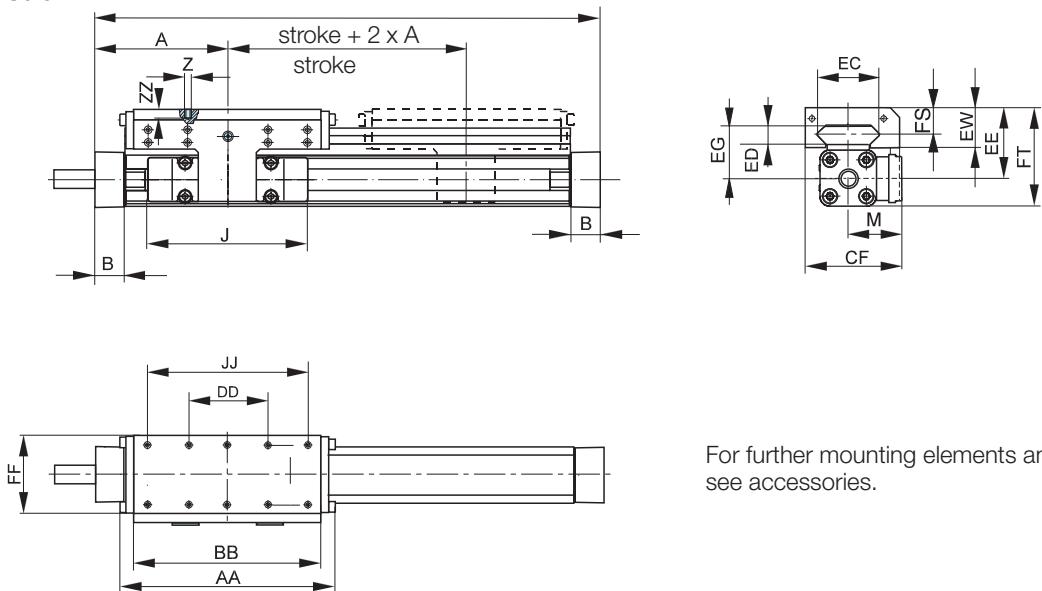

For further mounting elements and options see accessories.




Dimension Table [mm]

Series	A	B	J	M	Z	AA	BB	DD	CF	EC	ED	EE	EG	EW	FF	FT	FS	GG	JJ	ZZ
SL 25	100	22.0	117	40.5	M6	162	142	60	72.5	47	12	53	39	30	64	73.5	20	50	120	12
SL 32	125	25.5	152	49.0	M6	205	185	80	91.0	67	14	62	48	33	84	88.0	21	64	160	12
SL 50	175	33.0	200	62.0	M6	284	264	120	117	94	14	75	56	39	110	118.5	26	90	240	16

Guide Mounting

Guide mountings are required from a certain stroke length to prevent excessive deflection and vibration of the actuator.

The diagrams show the maximum permissible unsupported length in relation to loading.

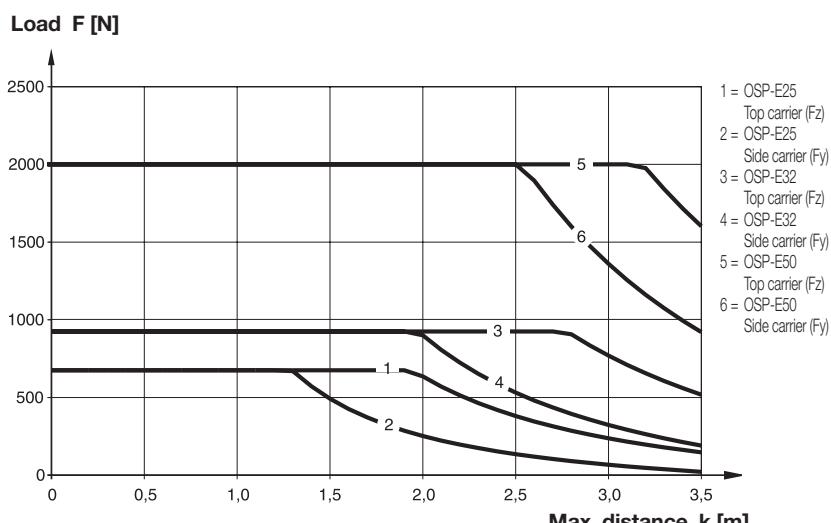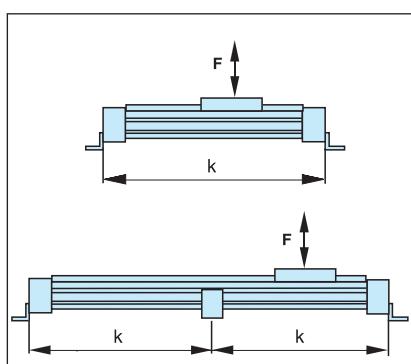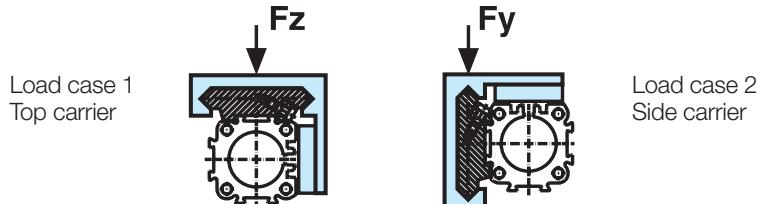

(Up to the curve in the above graph the deflection will be max. 0.2 % of distance k.)

POWERSLIDE Roller Guide

Series PS 25 to 50 for Acutator

- Series OSP-E Belt *
- Series OSP-E Screw

* Series PS for OSP-E Bi-parting version on request

Technical Data

The table shows the maximum permissible values for smooth operation, which must not be exceeded even under dynamic conditions.

For further information and technical data see data sheets for actuators.


Features:

- Anodised Aluminium Guide Carriage with Vee Rollers Having 2 Rows of Ball Bearings
- Hardened Steel Guide Rail
- Several Guide Sizes Can be Used on the Same Drive
- Max. Speed $v = 3$ m/s
- Tough Roller Cover With Wiper and Grease Nipple
- Any Length of Stroke up to 3,500 mm (longer strokes on request).


The Maximum Stroke Lengths of Actuators OSP-E..B, OSP-E..SB and OSP-E..ST must be observed.

Versions

- for Electric Actuator:
Series OSP-E Belt
Series OSP-E Screw

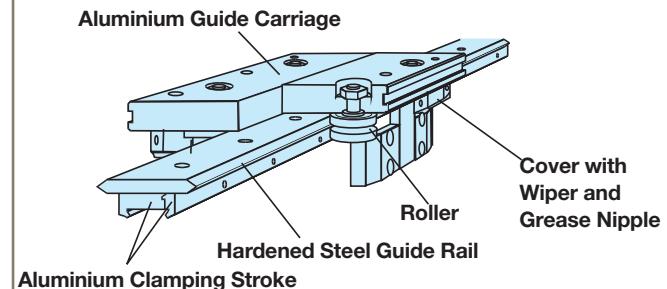


Loads, Force and Moment

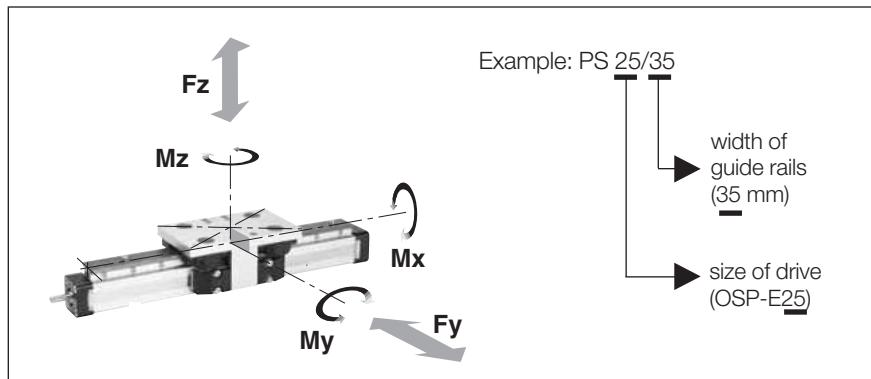


Series	Max. Moments [Nm]			Max. Load [N]	Mass of Drive with Guide [kg]				Mass *	Order No. Powerslide for	
					with 0 mm Stroke		increase per 100 mm Stroke		of Guide Carriage		
	M _x	M _y	M _z	F _y , F _z	OSP-E Belt	OSP-E Screw	OSP-E Belt	OSP-E Screw	[kg]	OSP-E* Belt	OSP-E Screw
PS 25/25	14	63	63	910	1.9	1.8	0.30	0.37	0.7	20304FIL	20015FIL
PS 25/32	17	70	70	1,010	2.1	1.9	0.34	0.41	0.8	20305FIL	20016FIL
PS 25/44	20	175	175	1,190	3.0	2.7	0.42	0.49	1.5	20306FIL	20017FIL
PS 32/35	20	70	70	1,400	3.1	3.2	0.51	0.63	0.8	20307FIL	20286FIL
PS 32/44	50	175	175	2,300	4.0	4.1	0.59	0.70	1.5	20308FIL	20287FIL
PS 50/60	90	250	250	3,000	8.8	8.7	1.04	1.36	2.3	20309FIL	20288FIL
PS 50/76	140	350	350	4,000	12.2	12.0	1.28	1.6	4.9	20310FIL	20289FIL

Dimensions - Series OSP-E Belt

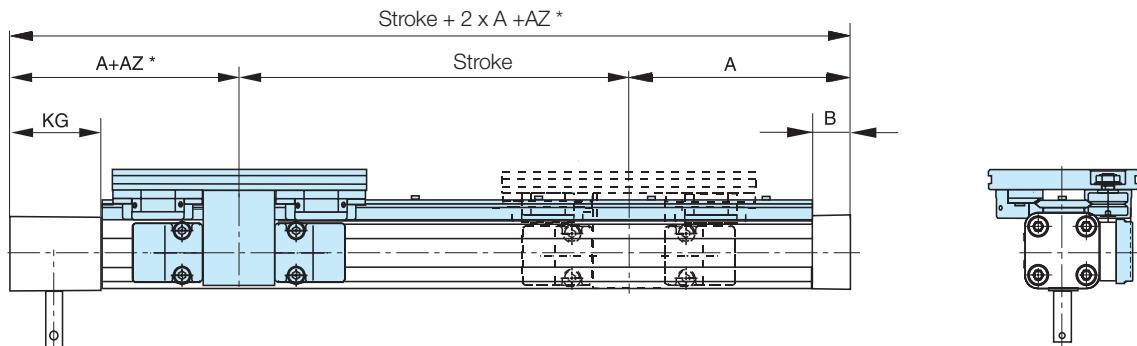

* **Please note:** The dimension „AZ“ must be added to „A“. Stroke length to order is stroke + dimension „AZ“ + safety clearance. Please also note the effect of dimension „AZ“ when retrofitting a guide – contact your local Parker technical support department.







Dimensions - Series OSP-E Screw

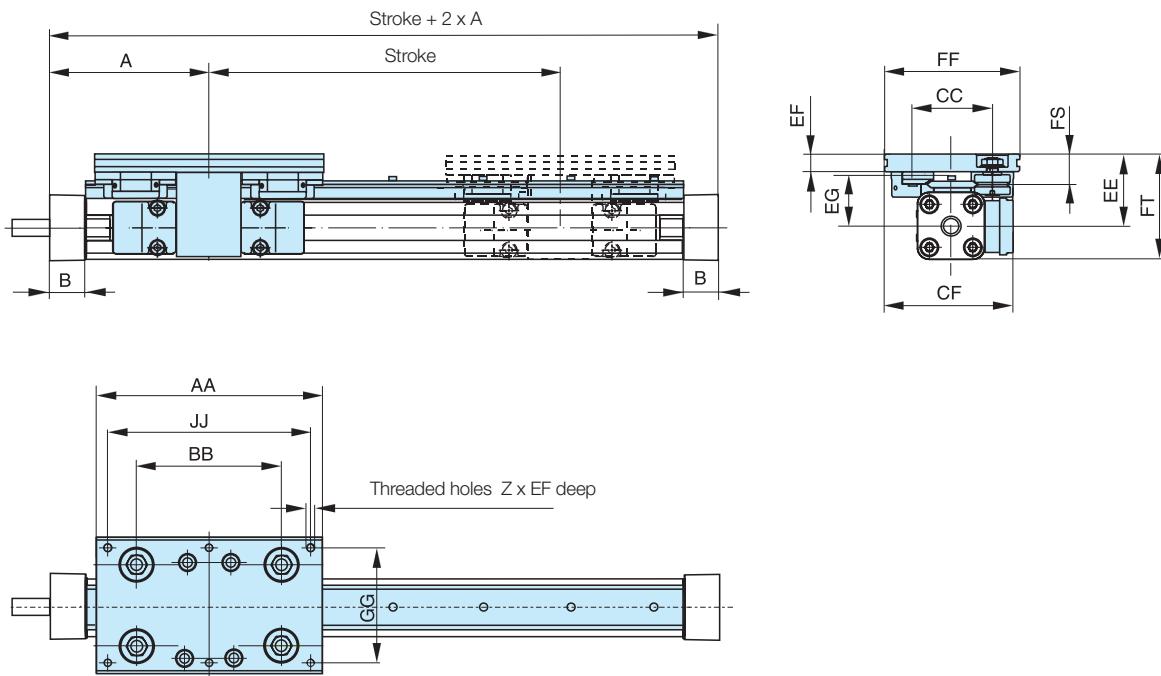


Dimensions [mm]

Series	A	B	Z	AA	AZ	BB	CC	CF	EE	EF	EG	FF	FS	FT	GG	JJ	KG
	OSP-E Belt	OSP-E Screw	OSP-E Belt	OSP-E Screw													
PS 25/25	125	100	22	22.0	6 x M6	145	5	90	47	79.5	53.0	11.0	39.0	80	20.0	73.5	64
PS 25/35	125	100	22	22.0	6 x M6	156	10	100	57	89.5	52.5	12.5	37.5	95	21.5	73.0	80
PS 25/44	125	100	22	22.0	6 x M8	190	27	118	73	100.0	58.0	15.0	39.0	116	26.0	78.5	96
PS 32/35	150	125	25	25.5	6 x M6	156	-	100	57	95.5	58.5	12.5	43.5	95	21.5	84.5	80
PS 32/44	150	125	25	25.5	6 x M8	190	6	118	73	107.0	64.0	15.0	45.0	116	26.0	90.0	96
PS 50/60	200	175	25	33.0	6 x M8	240	5	167	89	130.5	81.0	17.0	61.0	135	28.5	123.5	115
PS 50/76	200	175	25	33.0	6 x M10	280	25	178	119	155.5	93.0	20.0	64.0	185	39.0	135.5	160

OSP-E Belt –**if combined with a linear guide, please also state position of linear guide!****Position of Drive Shaft**
Standard = 0**Position of Drive Shaft**
opposite to Standard = 1**Position of Drive Shaft**
Both Sides = 2



Position of Linear Guide	Position of Linear Guide	Position of Linear Guide
Standard Position of the guide on the opposite side of the drive shaft 	Standard Position of the guide on the opposite side of the drive shaft 	Standard Position of the guide on the opposite side of the drive shaft 
Opposite to Standard Position of the guide on the side of the drive shaft 	Opposite to Standard Position of the guide on the side of the drive shaft 	Opposite to Standard Position of the guide on the side of the drive shaft 

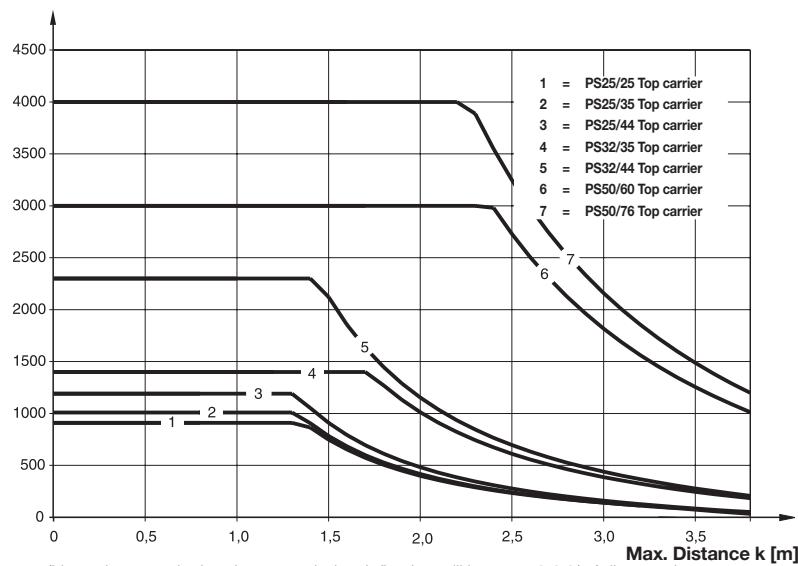Load Case 1 - Top Carrier**Load Fz [N]**


(Up to the curve in the above graph the deflection will be max. 0.2 % of distance k)

Guide Mounting

Guide mountings are required from a certain stroke length to prevent excessive deflection and vibration of the actuator. The diagrams show the maximum permissible unsupported length in relation to loading.

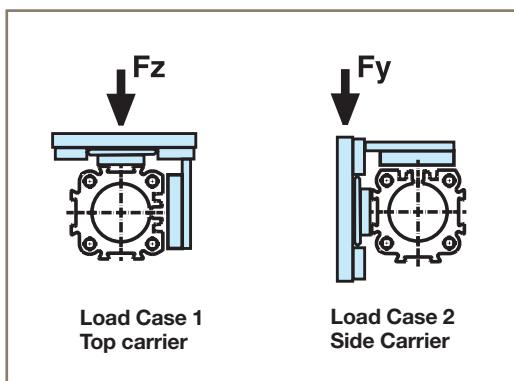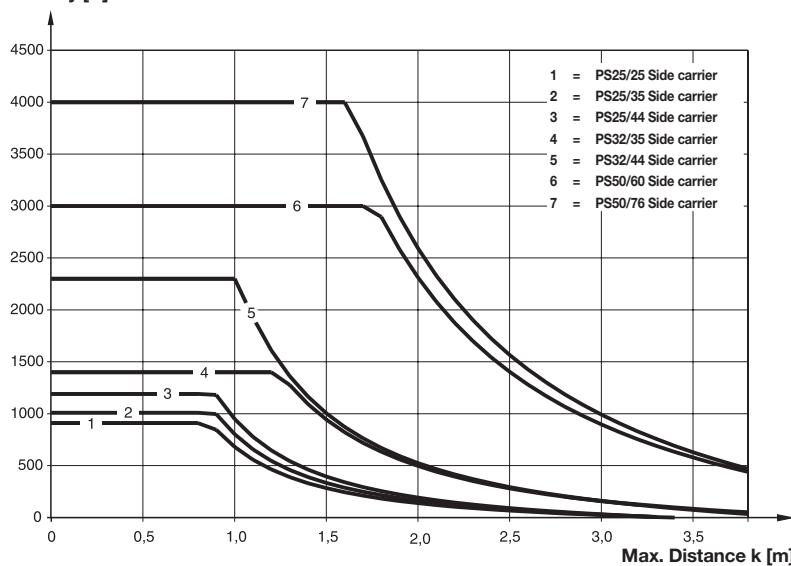**Load Case 2 - Side Carrier****Load Fy [N]**

(Up to the curve in the above graph the deflection will be max. 0.2 % of distance k)

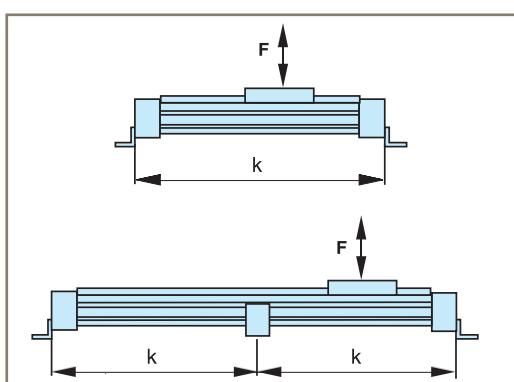

1. Calculation of Load Factor L_F

Performance

Calculation of performance is achieved in two stages:

- Determination of load factor L_F from the loads to be carried
- Calculation of service life in km

$$L_F = \frac{F_y}{F_{y \max}} + \frac{F_z}{F_{z \max}} + \frac{M_x}{M_{x \max}} + \frac{M_y}{M_{y \max}} + \frac{M_z}{M_{z \max}}$$

with combined loads, L_F must not exceed the value 1

2. Calculation of Performance

Lubrication

For maximum system life, lubrication of the rollers must be maintained at all times.

Only high quality lithium-based greases should be used.

Lubrication intervals are dependent on environmental conditions (temperature, running speed, grease quality etc.) therefore the installation should be regularly inspected.

- For PS 25/25, PS 25/35 and PS 32/35: $\text{Service life [km]} = \frac{106}{(L_F + 0,02)^3}$
- For PS 25/44, PS 32/44 and PS 50/60: $\text{Service life [km]} = \frac{314}{(L_F + 0,015)^3}$
- For PS 50/76: $\text{Service life [km]} = \frac{680}{(L_F + 0,015)^3}$

PROLINE Aluminium Roller Guide

Series PL 25 to 50 for Acutator

- Series OSP-E Belt *
- Series OSP-E Screw

Features:


- High Precision
- High Velocities (10 m/s)
- Smooth Operation - Low Noise
- Integrated Wiper System
- Life Time Lubrication
- Compact Dimensions
 - Compatible to Slideline Plain Bearing Guide
- Version available up to 3,750 mm

The maximum stroke lengths of actuators OSP-E..B, OSP-E..SB and OSP-E..ST must be observed


* Series PL for OSP-E Bi-parting version on request.

Versions

- For Electric Actuator:
 - Series OSP-E Belt
 - Series OSP-E Screw

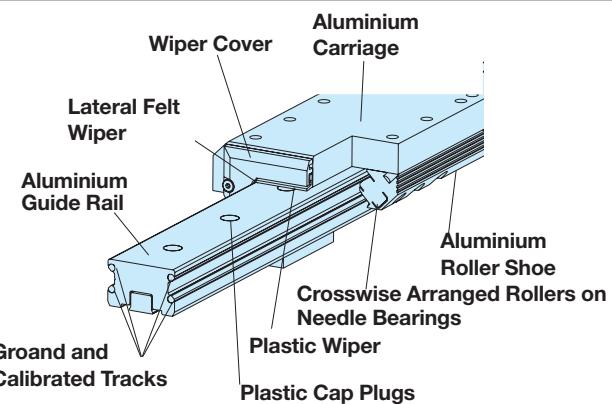

Loads, Forces and Moments

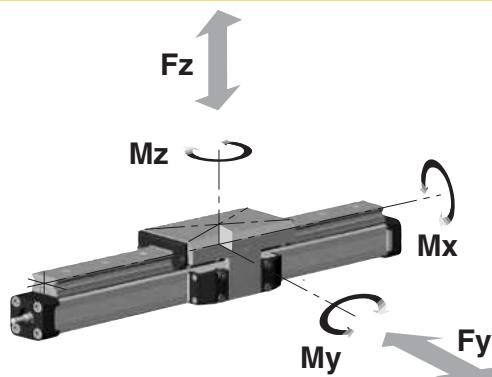

Technical Data

The table shows the maximum permissible loads. If multiple moments and forces act upon cylinder simultaneously, the following equation applies:

$$\frac{F_y}{F_{y \max}} + \frac{F_z}{F_{z \max}} + \frac{M_x}{M_{x \max}} + \frac{M_y}{M_{y \max}} + \frac{M_z}{M_{z \max}} \leq 1$$

With a load factor of ≤ 1 , the service life is 5000 km.


The sum of the loads must not exceed > 1 .

The table shows the maximum permissible values for light, shock-free operation, which must not be exceeded even under dynamic conditions.

Series	Max. Moments [Nm]				Max. Load [N]	Mass of Drive with Guide [kg]				Mass Guide Carriage	Order No. PROLINE ¹⁾ for	
	M _x	M _y	M _z	F _y , F _z		bei 0 mm Stroke	increase per 100 mm stroke	[kg]	OSP-E* Belt	OSP-E Screw		
PL25	19	44	44	986	1.9	1.8	0.33	0.40	0.75	20874FIL	20856FIL	
PL32	33	84	84	1,348	3.6	3.7	0.58	0.70	1.18	20875FIL	20857FIL	
PL50	128	287	287	3,582	8.9	8.8	1.00	1.32	2.50	20876FIL	20859FIL	

¹⁾ Stainless steel on request

Dimensions Series OSP-E Belt PL25, PL32, PL50

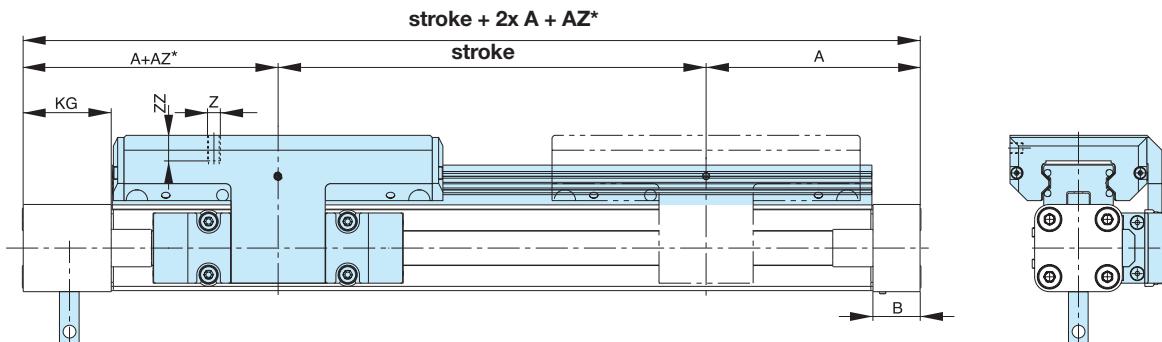


*Please note: Dimension "AZ" must be added to dimension "A". The stroke to be ordered will be: stroke + min. dimension "AZ" + additional length. Please observe the effect of dimension "AZ" when retrofitting a guide. Please contact our application engineers.

Dimension Table [mm] Series OSP-E Belt PL25, PL32, PL50

Series	A	B	J	M	Z	AA	AZ	BB	DD	CF	EC	EE	EG	FF	FS	FT	GG	JJ	KG	ZZ
PL25	125	22	117	40.5	M6	154	10	144	60	72.5	32.5	53	39	64	23	74.0	50	120	57	12
PL32	150	25	152	49.0	M6	197	11	187	80	91.0	42.0	62	48	84	25	88.0	64	160	61	12
PL50	200	25	200	62.0	M6	276	24	266	120	117.0	63.0	75	57	110	29	118.0	90	240	85	16







Dimensions Series OSP-E Screw PL25, PL32, PL50

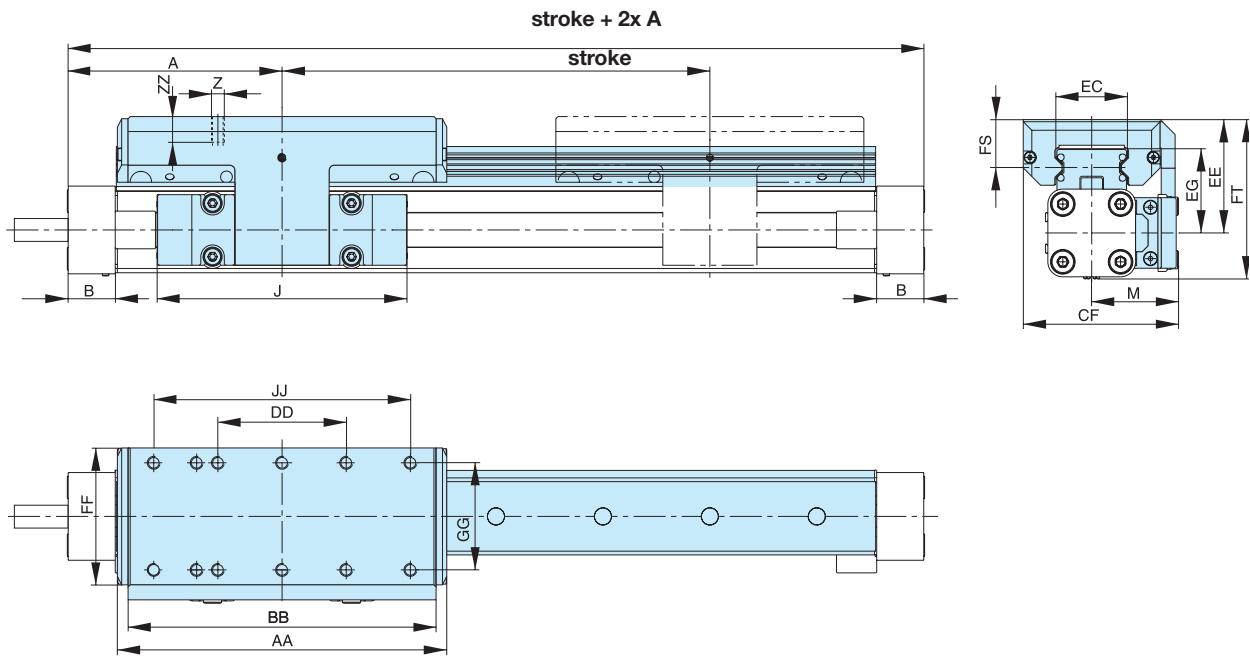




Dimension Table [mm] OSP-E Screw PL25, PL32, PL50

Series	A	B	J	M	Z	AA	BB	DD	CF	EC	EE	EG	FF	FS	FT	GG	JJ	ZZ
PL25	100	22	117	40.5	M6	154	144	60	72.5	32.5	53	39	64	23	74	50	120	12
PL32	125	25.5	152	49.0	M6	197	187	80	91.0	42.0	62	48	84	25	88	64	160	12
PL50	175	33.0	200	62.0	M6	276	266	120	117.0	63.0	75	57	110	29	118	90	240	16

OSP-E Belt –**if combined with a linear guide, please also state position of linear guide!**

Position of Drive Shaft Standard = 0	Position of Drive Shaft opposite to Standard = 1	Position of Drive Shaft Both Sides = 2
Position of Guide	Position of Guide	Position of Guide
Standard Guide opposite side the drive shaft 	Standard Guide opposite side the drive shaft 	Standard Guide opposite side the drive shaft 
Opposite to Standard Guide on the same side of the drive shaft 	Opposite to Standard Guide on the same side of the drive shaft 	Opposite to Standard Guide on the same side of the drive shaft 

Guide mountings are required from a certain stroke length to prevent excessive deflection and vibration of the actuator. The diagrams show the maximum permissible unsupported length in relation to loading.

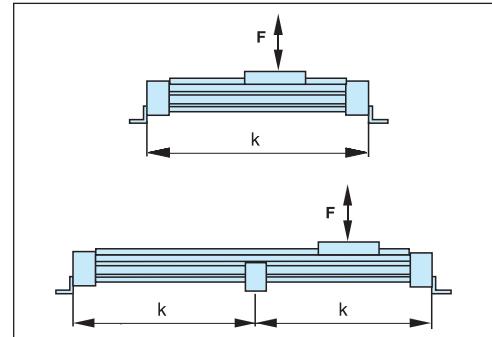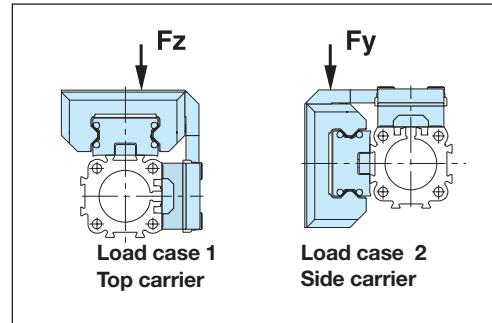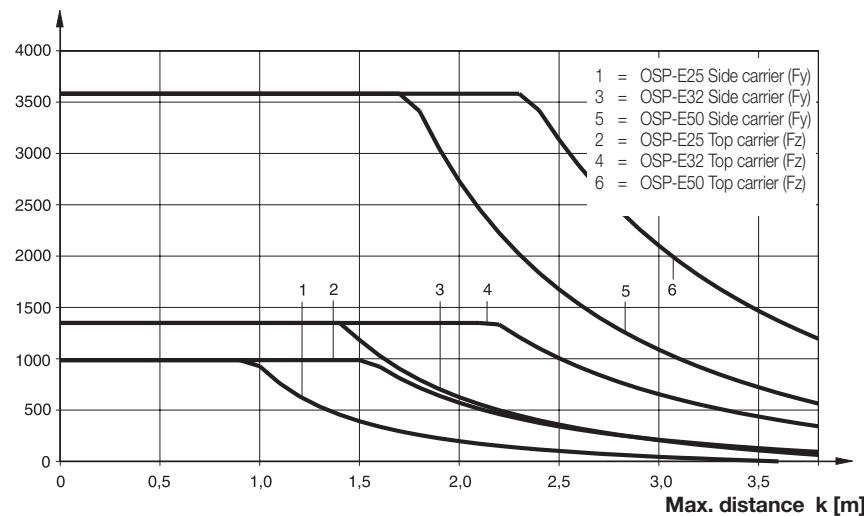Load F [N]

HD Heavy Duty Guide


Series HD 25 to 50 for Actuator

- Series OSP-E..SB, ..ST


OSP
ORIGA
SYSTEM
PLUS

Features:


- Guide System 4-row Ball Bearing Guide
- Polished and Hardened Guide Rails of Steel
- For Highest Loads in all Directions
- Highest Precision
- Integrated Wiper
- Grease Nipple for Relubrication
- Anodized Guide Carriage with the Same Connecting Dimensions as OSP-Guide GUIDELINE
- Maximum Velocity $v = 5$ m/s

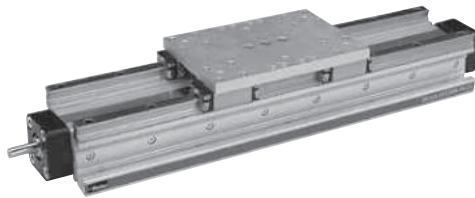

Version - for Electric Actuator: Series OSP-E Screw

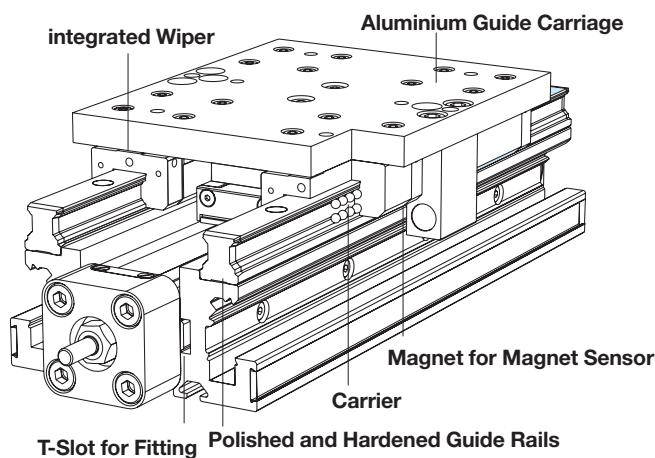

Loads, Forces and Moments

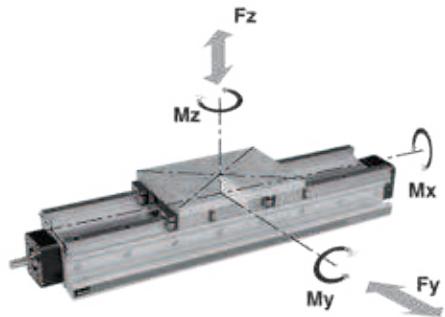

Technical Data


For the maximum permissible loads please refer to the table below. If several forces and moments loads act upon the guide simultaneously, the following equation will apply:

$$\frac{F_y}{F_{y \max}} + \frac{F_z}{F_{z \max}} + \frac{M_x}{M_{x \max}} + \frac{M_y}{M_{y \max}} + \frac{M_z}{M_{z \max}} \leq 1$$

The total of the loads must not exceed > 1 under any circumstances.

The table shows the maximum permissible values for light, shock-free operation which must not be exceeded even under dynamic conditions.


Series	Max. Moments [Nm]			Max. Load [N]		Mass of Actuator with Guide [kg]				Mass Guide-Carrier	Order No. HD-Guide for OSP-E
					at 0 mm stroke				increase per 100 mm stroke		
	M _x	M _y	M _z	F _y	F _z	OSP-E..SB	OSP-E..ST	OSP-E..SB	OSP-E..ST	[kg]	
HD 25	260	320	320	6.000	6.000	3.215	3.315	0.957	1.007	1.289	21246FIL
HD 32	285	475	475	6.000	6.000	4.868	4.968	1.198	1.258	1.367	21247FIL
HD 50	1.100	1.400	1.400	18.000	18.000	13.218	13.318	2.554	2.674	3.551	21249FIL

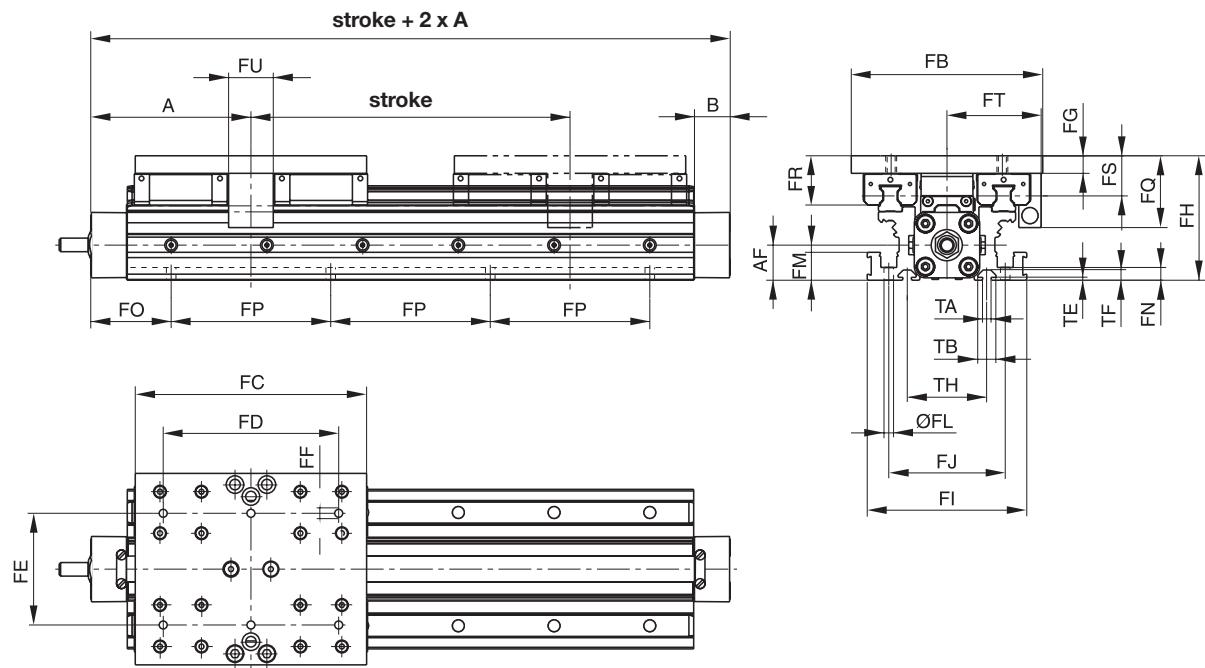Dimension Series OSP-E Screw HD25, HD32, HD50**Hint:**

The heavy-duty guide HD must be fitted to a level surface over the entire length. If T-nuts are used, the distance between them must not exceed 100 mm.

Arrangement of Magnetic Sensors:

The magnetic sensors can be fitted to either side over the entire length.

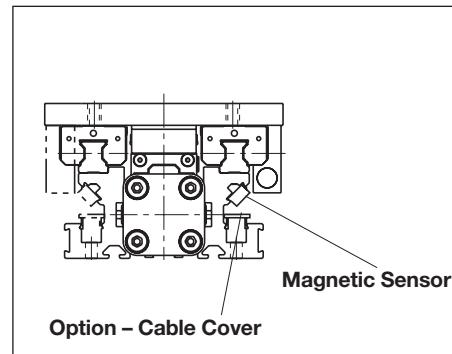

Dimension Table [mm]

Series	A	B	AF	FB	FC	FD	FE	FF	FG	FH	FI	FJ	ØFL
HD25	100	22.0	22	120	145	110	70	M6	11	78	100	73	6.0
HD32	125	25.5	30	120	170	140	80	M6	11	86	112	85	6.0
HD50	175	33.0	48	180	200	160	120	M8	14	118	150	118	7.5

Series	FM	FN	FP	FQ	FR	FS	FT	FU	TA	TB	TE	TF	TH
HD25	17.5	8	100	45	31	25.0	59	28	5.2	11.5	1.8	6.4	50
HD32	17.5	8	100	45	31	25.0	63	30	5.2	11.5	1.8	6.4	60
HD50	22.0	10	100	58	44	35.5	89	30	8.2	20.0	4.5	12.3	76

FO			
OSP-E..SB..ST			
x	HD25	HD32	HD50
00	50.0	75.0	75.0
01	50.5	75.5	75.5
02	51.0	76.0	76.0
03	51.5	76.5	76.5
04	52.0	77.0	77.0
05	52.5	77.5	77.5
06	53.0	78.0	78.0
07	53.5	78.5	78.5
08	54.0	79.0	79.0
09	54.5	79.5	79.5
10	55.0	80.0	80.0
11	55.5	80.5	80.5
12	56.0	81.0	81.0
13	56.5	81.5	81.5
14	57.0	82.0	82.0
15	57.5	82.5	82.5
16	58.0	83.0	83.0
17	58.5	83.5	83.5
18	59.0	84.0	84.0
19	59.5	84.5	84.5
20	60.0	85.0	85.0
21	60.5	85.5	85.5
22	61.0	86.0	86.0
23	61.5	86.5	86.5
24	62.0	87.0	87.0
25	62.5	87.5	87.5
26	63.0	88.0	88.0
27	63.5	88.5	88.5
28	64.0	89.0	89.0
29	64.5	89.5	89.5
30	65.0	90.0	90.0
31	65.5	90.5	90.5
32	66.0	91.0	91.0

FO			
OSP-E..SB..ST			
x	HD25	HD32	HD50
33	66.5	41.5	91.5
34	67.0	42.0	92.0
35	67.5	42.5	92.5
36	68.0	43.0	93.0
37	68.5	43.5	43.5
38	69.0	44.0	44.0
39	69.5	44.5	44.5
40	70.0	45.0	45.0
41	70.5	45.5	45.5
42	71.0	46.0	46.0
43	71.5	46.5	46.5
44	72.0	47.0	47.0
45	72.5	47.5	47.5
46	73.0	48.0	48.0
47	73.5	48.5	48.5
48	74.0	49.0	49.0
49	74.5	49.5	49.5
50	75.0	50.0	50.0
51	75.5	50.5	50.5
52	76.0	51.0	51.0
53	76.5	51.5	51.5
54	77.0	52.0	52.0
55	77.5	52.5	52.5
56	78.0	53.0	53.0
57	78.5	53.5	53.5
58	79.0	54.0	54.0
59	79.5	54.5	54.5
60	80.0	55.0	55.0
61	80.5	55.5	55.0
62	81.0	56.0	56.0
63	82.0	56.5	56.5
64	82.0	57.0	57.0
65	32.5	57.5	57.5

FO			
OSP-E..SB..ST			
x	HD25	HD32	HD50
66	33.0	58.0	58.0
67	33.5	58.5	58.5
68	34.0	59.0	59.0
69	34.5	59.5	59.5
70	35.0	60.0	60.0
71	35.5	60.5	60.5
72	36.0	61.0	61.0
73	36.5	61.5	61.5
74	37.0	62.0	62.0
75	37.5	62.5	62.5
76	38.0	63.0	63.0
77	38.5	63.5	63.5
78	39.0	64.0	64.0
79	39.5	64.5	64.5
80	40.0	65.0	65.0
81	40.5	65.5	65.5
82	41.0	66.0	66.0
83	41.5	66.5	66.5
84	42.0	67.0	67.0
85	42.5	67.5	67.5
86	43.0	68.0	68.0
87	43.5	68.5	68.5
88	44.0	69.0	69.0
89	44.5	69.5	69.5
90	45.0	70.0	70.0
91	45.5	70.5	70.5
92	46.0	71.0	71.0
93	46.5	71.5	71.5
94	47.0	72.0	72.0
95	47.5	72.5	72.5
96	48.0	73.0	73.0
97	48.5	73.5	73.5
98	49.0	74.0	74.0
99	49.5	74.5	74.5

Note:

The dimension FO is derived from the last two digits of the stroke:

Sample:
stroke 15**25** mm



For a cylinder OSP-E25 the table shows that for x = 25 mm:
FO = 62.5 mm

Description	Illustration		Page
Motor Mountings		Coupling Housing, Motor Flange, Motor Coupling	84ff
		Belt Gear	
End Cap Mountings			91ff
		Flange C-E	
Profile Mountings		Mid Section Support Guide Mounting	94 ff
		Adapter Profile	
Compensations		Clevis Mounting	101 ff
		Inversion Mounting	
Guide Mountings		End Cap Mounting Profile Mounting	104 ff
Magnetic Sensors			109 ff
Displacement Measuring System SFI-plus			110 ff

Coupling Housing Motor Flange

OSP-E..BHD Belt Actuator with Integrated Guide

Size 20, 25, 32, 50

Via the coupling housing the gear or the motor can be fitted directly to the actuator and the drive shafts by means of a motor flange.

The motor flange matches the above mentioned coupling housing and has been reworked to match the respective type of motor.

Motor flanges for the available range of gears, servo and stepper motors are included in the respective data sheet, including technical data and dimensions.




Please refer to the respective catalogues.



Coupling Housing (for gear or motor mounting)

Series	Ø A	L	M	N	Ø O	Order No.
OSP-E20BHD	65.8	19	60	60	48	16215FIL
OSP-E20BHD*	65.8	79	60	60	48	16269FIL
OSP-E25BHD	82.0	22	76	76	68	12300FIL
OSP-E32BHD	106.0	30	98	98	88	12301FIL
OSP-E50BHD	144.0	41	130	130	118	12302FIL

* Coupling housing for gear or motor mounting with a motor coupling

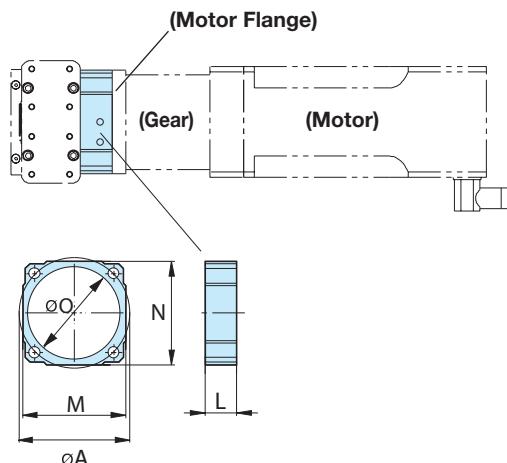

Motor Flange (semi-finished)

Series	□ C	CB	Ø L	Ø N	Ø O	P	R	S	Ø RS	Order No.
OSP-E20BHD	75	10	25	6.6	11	3.2	46.5	46.5	65.8	16216FIL
OSP-E25BHD	90	14	36	9.0	15	5.5	57.9	57.9	82.0	12308FIL
OSP-E32BHD	100	14	55	11.0	18	3.5	74.9	74.9	106.0	12309FIL
OSP-E50BHD	125	18	77	13.5	20	5.5	101.8	101.8	144.0	12310FIL

Motor Flange (finished)

Series	Comment	Order No.*
OSP-E20BHD	for PV40-TA / LP050	16224FIL
OSP-E20BHD	for PV60-TA / LP070 (with gear mounting 15166)	16273FIL
OSP-E20BHD	for PS60	18283FIL
OSP-E25BHD	for PV60-TA / LP070	12311FIL
OSP-E25BHD	for PS60	18413FIL
OSP-E32BHD	for PV90-TA / LP090	12312FIL
OSP-E32BHD	for PS90	18419FIL
OSP-E50BHD	for PV115-TA / LP120	12313FIL
OSP-E50BHD	for PS115	18422FIL

*Motor Coupling not included

Coupling Housing / Motor Flange / Motor Coupling

OSP-E..BV Vertical Belt Actuator with Integrated Ball Bearing Guide

Size 25

The coupling housing with suitable flange allows proper connections between the drive shaft of the actuator and the gear shaft or motor shaft. The gear or the motor can be fitted directly or indirectly. If a Parker gear is used, direct clamping of the gear shaft into the drive shaft with clamping stroke. As an alternative the gear or motor can be fitted to the actuator via motor coupling.

1) Hint:

When selecting the type of motor mounting please observe the respective drive shaft versions in accordance with the ordering code of the actuator (page 34).




Coupling Housing



Series	Ø A	L	M	N	Ø O	Order No.
OSP-E20BV	65.8	19	60	60	48	16215FIL
OSP-E20BV*	65.8	79	60	60	48	16269FIL
OSP-E25BV	82.0	22	76	76	68	12300FIL
OSP-E25BV*	65.8	84	87	87	48	20139FIL

* Coupling housing for gear or motor mounting with a motor coupling

for Direct Clamping

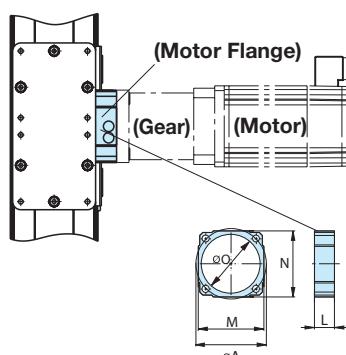

for Clamping with Motor Clamping

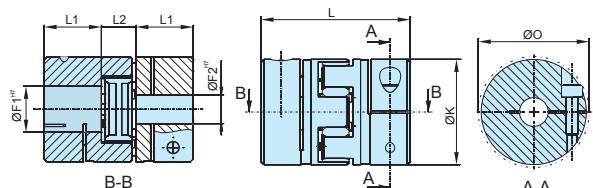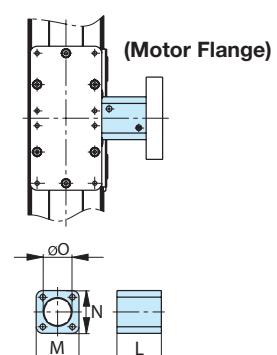


Universal Motor Coupling

Series	Ø F ₁ ^{H7}	Ø F ₂ ^{H7}	Ø F ^{H7}	Ø K	L	L ₁	L ₂	Ø O	Order No.
OSP-E20BV	12	9.5	8 - 24	40	66	25	16	46	16268FIL
OSP-E25BV	16	9.5	8 - 24	40	66	25	16	46	10845FIL

Motor Flange

Series	□ C	CB	Ø L	Ø N	Ø O	P	R	S	Ø RS	Order No.
OSP-E20BV	75	10	25	6.6	11	3.2	46.5	46.5	65.8	16216FIL
OSP-E20BV*	120	15	25	6.6	11	3.0	46.5	46.5	65.8	16267FIL
OSP-E25BV	90	14	36	9.0	15	5.5	58.0	58.0	82.0	12308FIL
OSP-E25BV*	120	15	35	6.6	11	3.0	46.0	46.0	65.0	12069FIL

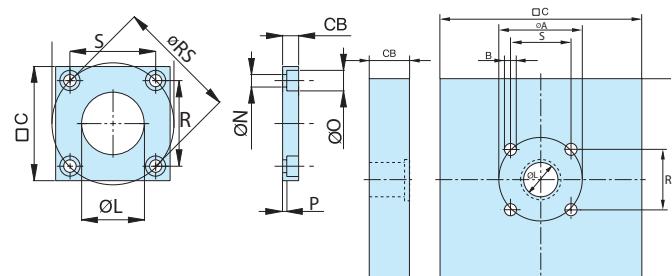

Motor Flange (finished)

Series	Comment	Order No.
OSP-E20BV	for PV40-TA / LP050 (for Standard Clamp Shaft)	16224FIL
OSP-E20BV	for PV60-TA / LP070 (for Plain Shaft)	16273FIL
OSP-E20BV	for PS60 (for Plain Shaft)	18283FIL
OSP-E25BV	for PV60-TA / LP070	12311FIL
OSP-E25BV	for PS60	18413FIL

Coupling Housing / Motor Flange / Motor Coupling


OSP-E..B Belt Actuator with Internal Plain Bearing Guide

Size 25, 32, 50

The coupling housing with suitable motor flange allows easy and inherently stable connection of the gear or the motor to the actuator.



Hint:

Let us know the mounting dimensions of your motor. Upon request we will be pleased to check and manufacture a motor flange that will come up to your individual needs.

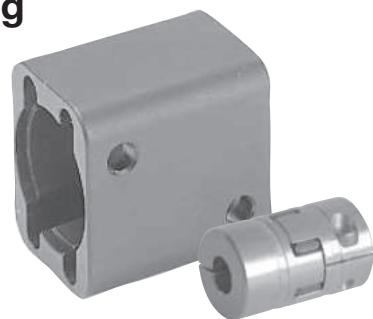

Coupling Housing (for gear or motor mounting)

Series	Ø A	L	M	N	Ø O	Order No.
OSP-E25B	33.5	47	40	30	25	20606FIL
OSP-E32B	42.0	49	49	38	33	20607FIL
OSP-E50B	59.4	76	65	54	48	20608FIL

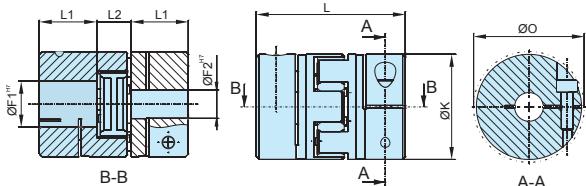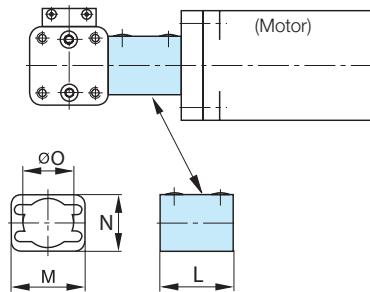


Motor Coupling Dimension [mm] and Order No.

Series	Ø F ₁ ^{H7}	Ø F ₂ ^{H7}	Ø F ^{H7}	Ø K	L	L1	L2	Ø O	Order No.
OSP-E25B	10	4.0	4 - 11	20	30	10	10	23.4	12073FIL
OSP-E32B	10	6.0	5 - 16	30	35	11	13	32.2	15197FIL
OSP-E50B	16	9.5	8 - 24	40	66	25	16	46.0	10845FIL

Motor Flange (universal)

Series	□ C	CB	Ø L	Ø N	Ø O	P	R	S	Ø RS	Order No.
OSP-E25B	100	20	16	5.5	10	3.0	30.0	15.0	33.5	12050FIL
OSP-E32B	100	20	22	6.6	11	4.0	38.0	18.0	42.0	12053FIL
OSP-E50B	120	15	35	9.0	15	3.0	50.0	32.0	59.4	12056FIL

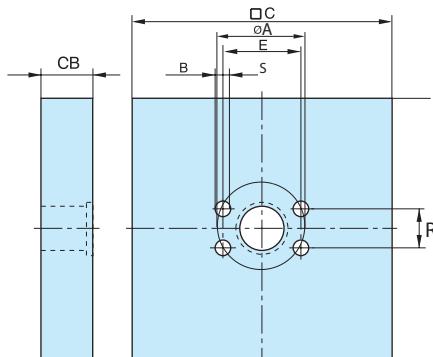

Motor Flange (finished)

Series	Comment	Order No. *
OSP-E25B	for PV40-TA / LP050 (Motor Coupling12080)	16076FIL
OSP-E32B	for PV40-TA / LP050 (Motor Coupling10841)	16090FIL
OSP-E32B	for PV60-TA / LP070 (Motor Coupling12980)	15930FIL
OSP-E32B	for PS60 (Motor Coupling12980)	18272FIL
OSP-E50B	for PV60-TA / LP070 (Motor Coupling12981)	16057FIL
OSP-E50B	for PS60 (Motor Coupling12981)	18277FIL

*Motor coupling not included

Coupling Housing / Motor Flange / Motor Coupling

OSP-E..SB, ..ST Screw Actuator with Internal Plain Bearing Guide

Size 25, 32, 50



The coupling housing with suitable motor flange allows easy and inherently stable connection of the gear or the motor to the actuator.

Hint: Let us know the mounting dimensions of your motor. Upon request we will be pleased to check and manufacture a motor flange that will come up to your individual needs.



Coupling Housing (for Motor)

Series	Ø A	L	M	N	Ø O	Order No.
OSP-E25S...	38.2	38	41	41	25	20137FIL
OSP-E32S...	50.9	54	52	52	33	20138FIL
OSP-E50S...	65.0	84	87	87	48	20139FIL

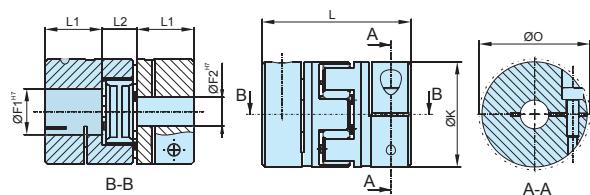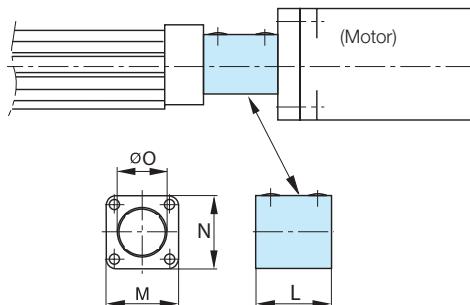


Motor Coupling Dimension [mm] and Order No.

Series	Ø F ₁ ^{H7}	Ø F ₂ ^{H7}	Ø F ^{H7}	Ø K	L	L1	L2	Ø O	Order No.
OSP-E25S...	6	6.0	4 - 11	20	30	10	10	23.4	12073FIL
OSP-E32S...	10	6.0	5 - 16	30	35	11	13	32.2	15197FIL
OSP-E50S...	15	9.5	8 - 24	40	66	25	16	46.0	12079FIL

Motor Flange (universal)

Series	□ C	CB	Ø L	Ø N	Ø O	P	R	S	Ø RS	Order No.
OSP-E25S...	100	20	16	5.5	10	3.0	27.0	27.0	38.2	12060FIL
OSP-E32S...	100	20	22	6.6	11	4.0	36.0	36.0	50.9	12064FIL
OSP-E50S...	120	15	35	6.6	11	3.0	46.0	46.0	65.0	12069FIL

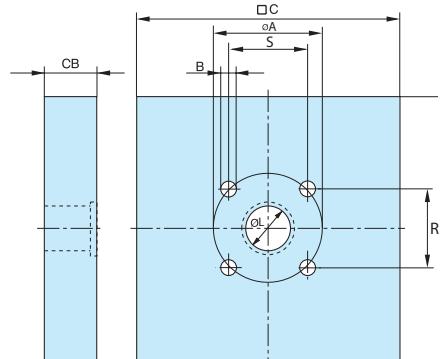

Motor Flange (finished)

Series	Comment	Order No. *
OSP-E25S...	for PV40-TA / LP050 (Motor Coupling12072)	16058FIL
OSP-E32S...	for PV40-TA / LP050 (Motor Coupling10841)	16070FIL
OSP-E32S...	for PV60-TA / LP070 (Motor Coupling12980)	15803FIL
OSP-E32S...	for PS60 (with Motor Coupling12980)	18281FIL
OSP-E50S...	for PV60-TA / LP070 (Motor Coupling15227)	15526FIL
OSP-E50S...	for PS60 (with Motor Coupling15227)	18283FIL

*Motor coupling not included

Motor Flange for Freely Selectable Mounting Dimensions

OSP-E..B Ball Actuator with Internal Plain Bearing Guide

OSP-E..SB, .. ST - Screw Actuator with Internal Plain Bearing Guide

OSP-E..SBR, STR - Screw Actuator with Internal Plain Bearing Guide and Piston Rod

Size 25, 32, 50

The motor flange for motors with freely selectable mounting dimensions offers flexible possibilities to connect most different types of motors to the electric actuators OSP-E. The drive shafts of actuator and motor are connected with a motor coupling in the coupling housing and the motor flange is centred.

Hint:


Please check the following data for the connection of the motor to the freely selectable motor flange and state when ordering:

1. Mounting angle W of the motor
2. Bore hole version B as thread M or counterbore S
3. Pitch circle diameter A as a function of M or S
4. Diameter of centring spigot D
5. Length of motor shaft G

Variable Dimensions for Flange


Version Thread „M“

Flange plate with thread,
motor flange with through bolt




Version Counterbore „S“



Flange plate with through bore
motor flange with thread



Version Counterbore „S“




Version Thread „M“

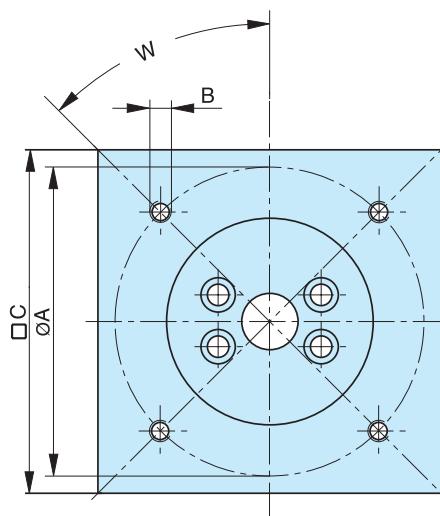

Counterbore Dimensions [mm]

Screw Size	\varnothing d4	\varnothing d5	\varnothing d6
M4x16	4.5	8.0	4.6
M5x22	5.5	10.0	5.7
M6x20	6.6	11.0	6.8
M8x25	9.0	15.0	9.0
M10x25	11.0	18.0	11

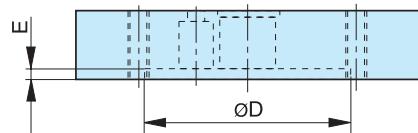

Dimension [mm] – Version for Belt Drive

W	45 °			90 °		
	25	32	50	25	32	50
A	min. Vers. S	48 + Ød5	60 + Ød5	80 + Ød5	40 + Ød5	49 + Ød5
	max. Vers. S	135 - Ød5	135 - Ød5	160 - Ød5	100 - Ød5	100 - Ød5
	min. Vers. M	45 + B	55 + B	75 + B	40 + B	48 + B
	max. Vers. M	135 - B	135 - B	160 - B	96 - B	96 - B
B	max. M10			M10		
D	min.	20	30	40	20	30
	max.	98	98	118	85	85
G	min.	18	21	32	18	21
	max.	33	35	45	33	35
C	100	100	120	100	100	120

Dimension Table of the Variable Dimension [mm] – Version for Screw Drive

W	45 °			90 °		
	25	32	50	25	32	50
A	min. Vers. S	58 + Ød5	74 + Ød5	123 + Ød5	41 + Ød5	52 + Ød5
	max. Vers. S	135 - Ød5	135 - Ød5	160 - Ød5	100 - Ød5	100 - Ød5
	min. Vers. M	52 + B	68 + B	82 + B	30 + B	40 + B
	max. Vers. M	135 - B	135 - B	160 - B	96 - B	96 - B
B	max. M10			M10		
D	min.	20	30	40	20	30
	max.	98	98	118	85	85
G	min.	18	21	32	18	21
	max.	33	35	45	33	35
C	100	100	120	100	100	120

Legend

W [°] = Angle of fastening boreholes
 A [mm] = Pitch circle diameter
 B = Thread size of fastening screw (version: M = thread, S = counterbore)
 D [mm] = Diameter of centring spigot
 E [mm] = Depth of centring spigot
 F [mm] = Diameter of motor shaft
 G [mm] = Length of motor shaft

Order Instructions

Description	Ident-Nr.
Article is configurable customized	18184FIL

Belt Gear for Freely Selectable Mounting Dimensions

Size 25, 32, 50

Series OSP-E..SB, ..ST, ..SBR, ..STR Actuator with Screw

The belt gear with its freely selectable mounting dimensions offers the possibility to fit most different types of motors to the actuator parallel to the motor axis. After the flange dimensions of the motor had been checked, the mounting side of the motor will be prepared for the individual demands of the customer.

When ordering please observe the version of the drive shaft of the actuator OSP-E with spindle. This version can either be ordered with plain shaft or plain shaft with keyway (Option). (If the version keyway is selected, the delivery period may be elongated.)

Versions of Drive Shaft OSP-E with Screw

Order No.	Drive Shaft
OSP-E..*...0.....	Plain
OSP-E..*...3.....	Keyway
OSP-E..*...4.....	Keyway long


*1=SB, 2=ST, 3=STR, 4=SBR

Max. Allowed Moment M [Nm] for Belt Gear

Size	Transmission	
	1:1	2:1
25	5	5
32	10	10
50	20	20

Beware of the max. allowed moments of the corresponding actuator

Belt Gear


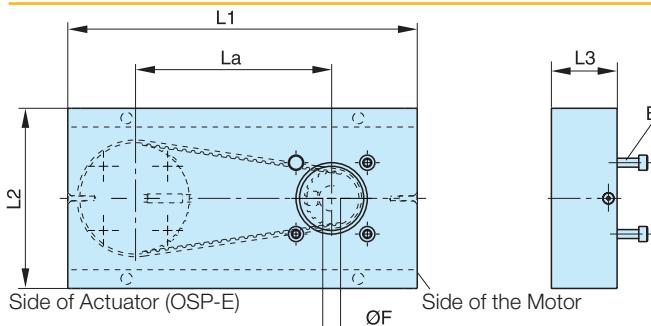


Dimension [mm] and Order Instructions


Series	L1	L2	L3	La	B	Ø F*	Order No.
						1:1 2:1	
OSP-E25	186	101	30	110	109,3	6, 7, 8, 9, 10, 11	15576FIL
OSP-E32	196	101	37	110	111,4	M4 - M10 8, 9, 10, 11, 12, 14	15576FIL
OSP-E50	234	101	50	135	133,7	12, 14, 16, 19	15576FIL

* other diameters on request

Variable Dimensions for Motor Mounting

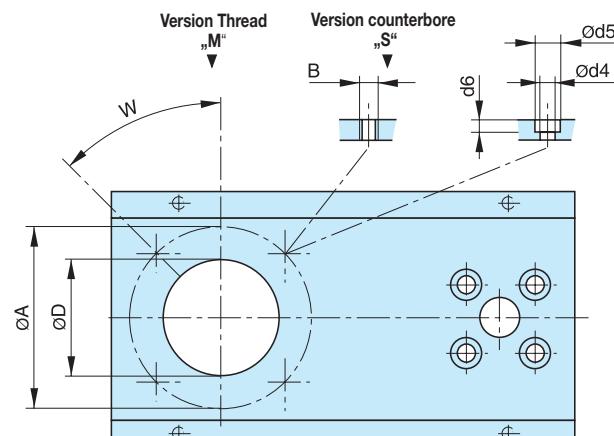

Screw Size	Ø d4	Ø d5	d6
M4	4.5	8	4.5
M5	5.5	10	5.3
M6	6.6	11	6.3
M8	9.0	15	5.5
M10	11	18	6.7

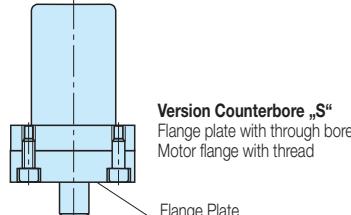

Dimension Table of the Variable Dimensions [mm]

Size	45 °			90 °		
	25	32	50	25	32	50
A min.	30			30		
max. Vers. S	110 - Ød5			70 - Ød5	70 - Ød5	80 - Ød5
max. Vers. M	110 - Ød4			70 - Ød4	70 - Ød4	80 - Ød4
B max.	M 8			M 8		
D min.	20			20		
max.	80	80	100	60	60	70
G min.	16	20	30	16	20	30
max.	23	30	40	23	30	40
ØF [mm]	6, 7, 8, 9, 10, 11, 12, 14	8, 9, 10, 11, 12, 14	12, 14, 16, 19	6, 7, 8, 9, 10, 11, 12, 14	8, 9, 10, 11, 12, 14	12, 14, 16, 19

End Cap Mounting

Size 20, 25, 32, 50

Series OSP-E.BHD for Actuator with Belt and Integrated Guides


On the end-face of each end cap there are eight threaded holes for mounting the actuator.

Material: Anodized Aluminium


The mountings are supplied in pairs.



Series OSP-E20BHD to E32BHD: Type CN-20, CN-25, CN-32

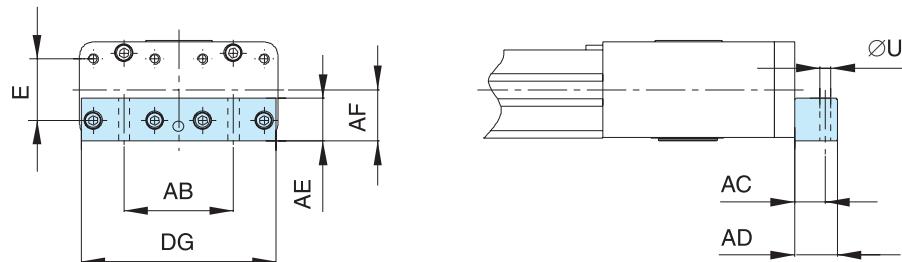

Series OSP-E50BHD: Type CN-50M

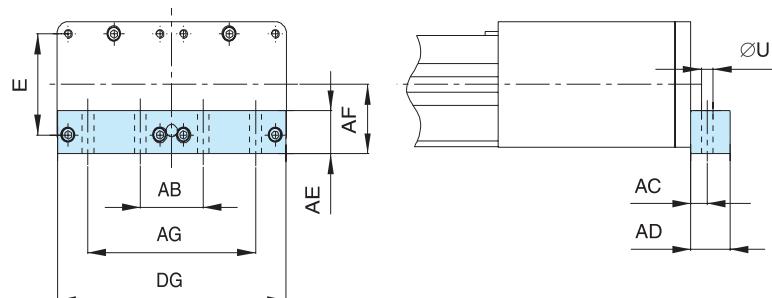

Dimension [mm] and Order Instructions

Series	Type	E	ØU	AB	AC	AD	AE	AF	AG	DG	Order No.*
OSP-E20BHD	CN-20	27	6.6	40	10.0	20	20	22	—	74	16213FIL
OSP-E25BHD	CN-25	27	6.6	52	16.0	25	25	22	—	91	12266FIL
OSP-E32BHD	CN-32	36	9.0	64	18.0	25	25	30	—	114	12267FIL
OSP-E50BHD	CN-50	70	9.0	48	12.5	30	30	48	128	174	12268FIL

(* = Pair)

End Cap Mounting


Size 20, 25, 32, 50

Series OSP-E..BHD Actuator with Belt and Integrated Guide


On the end-face of each end cap there are eight threaded holes each for mounting the actuator.

Material: Anodized Aluminium.


The mountings are supplied in pairs.



Series OSP-E20BHD to E32BHD:
Type CO-20, CO-25, CO-32

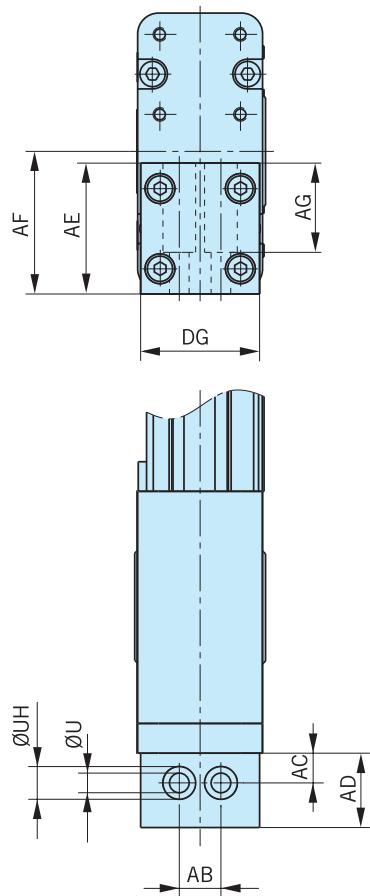

Series OSP-E50BHD:
Type CO-50

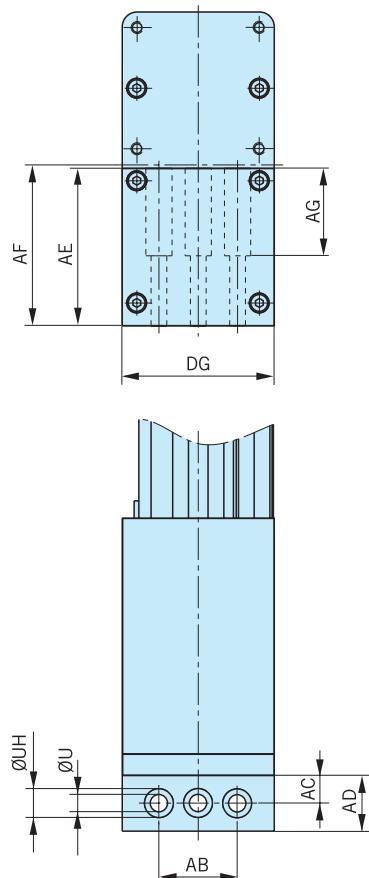

Dimension Table [mm] and Order Instructions

Series	Type	ØU	AB	AC	AD	AE	AF	AG	ØUH	DG	Order No. (*)
OSP-E20BHD	CO-20	6.6	18	15	22	42	45	39	11	40	16241FIL
OSP-E25BHD	CO-25	6.6	14	10	25	44	48	30	11	40	16245FIL
OSP-E32BHD	CO-32	9.0	19	12	28	60	62	42	15	56	16246FIL
OSP-E50BHD	CO-50	9.0	45	16	32	90	92	50	15	87	16247FIL

(*=Pair)

End Cap Mounting

Size 25, 32, 50

Series OSP-E...B Belt Actuator with Internal Plain Bearing Guide



On the end-face of each end cap there are four threaded holes for mounting the actuator. The hole layout is square, so that the mounting can be fitted to the bottom, top or either side.



Material: Series OSP-25 to 32: Galvanised steel.

Series OSP-50: Anodized Aluminium.

The mountings are supplied as pairs

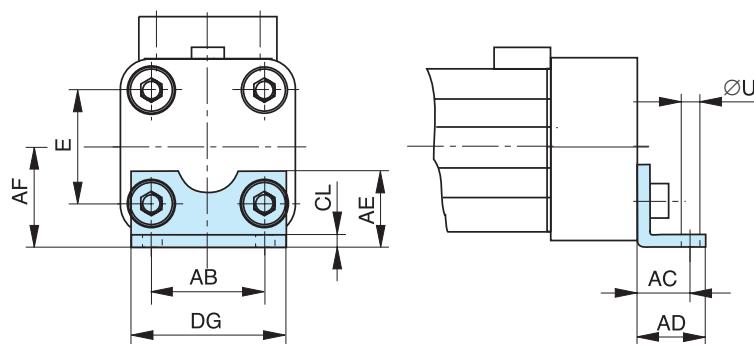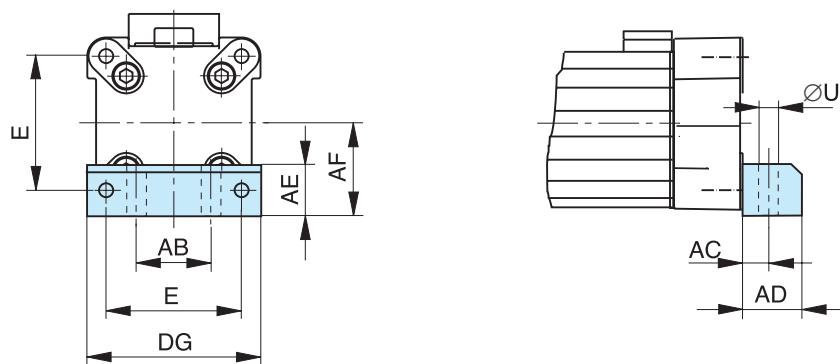Series OSP-E25 to E32: Type A1**Series OSP-E50: Type C1****Dimension Table [mm] and Order Instructions**

Series	E	\emptyset U	AB	AC	AD	AE	AF	CL	DG	Order No. (*)	
										Type A1	Type C1
OSP-E25	27	5.8	27	16.0	22	18	22	2.5	39	2010FIL	-
OSP-E32	36	6.6	36	18.0	26	20	30	3.0	50	3010FIL	-
OSP-E50	70	9.0	40	12.5	24	30	48	-	86		5010FIL

(*=Pair

Profile Mounting

Series OSP-E

Size 20, 25, 32, 50

Material: Anodized Aluminum

Stainless steel version on request.

The mountings are supplied in pairs.



Weight (mass) [kg]

Series	Weight (mass) [kg] (Pair)
MAE-20	0.3
MAE-25	0.3
MAE-32	0.4
MAE-50	0.8





Series OSP-E25 to E50, Type MAE-..

OSP-E..B, ..SB, ..ST, ..SBR, ..STR

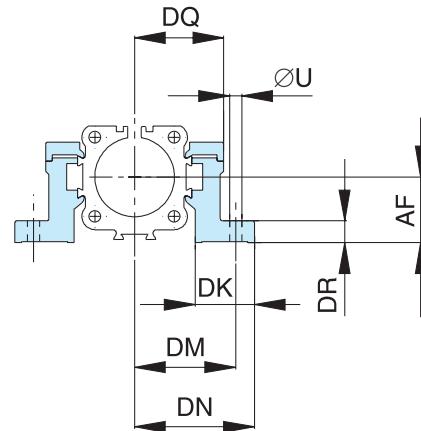

Series OSP-E20BHD to E50BHD, Type MAE-..

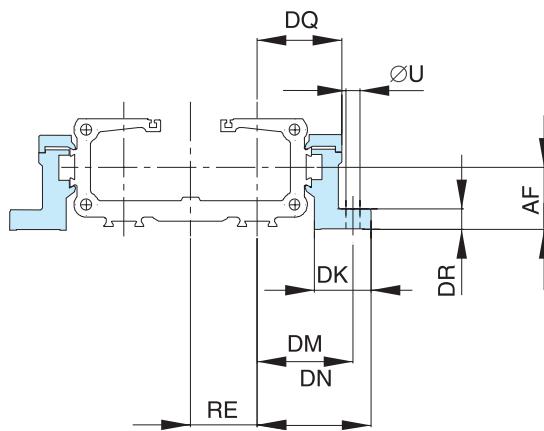

Dimension [mm] and Order Instructions

Series	Type	R	U	AF	DF	DH	DK	DM	DN	DO	DP	DQ	DR	DT	EF	EM	EN	EQ	RE	Order No.
OSP-E20	MAE-20	M5	5.5	22	27	38	26	33.5	41.0	40	92	28.0	8	10	41.5	28.5	49	36	23	12278FIL
OSP-E25	MAE-25	M5	5.5	22	27	38	26	40.0	47.5	40	92	34.5	8	10	41.5	28.5	49	36	26	12278FIL
OSP-E32	MAE-32	M5	5.5	30	33	46	27	46.0	54.5	40	92	40.5	10	10	48.5	35.5	57	43	32	12279FIL
OSP-E50	MAE-50	M6	7.0	48	40	71	34	59.0	67.0	45	112	52.0	10	11	64.0	45.0	72	57	44	12280FIL

Profile Mounting

Series OSP-E ..BHD Belt Actuator with Integrated Guide


Note on Types E1 and D1:

The Profile Mounting can also be mounted on the underside of the actuator, in which case its distance from the centre of the actuator is different. Stainless steel version on request.


The mountings are supplied singly.



Series OSP-E20BHD to E50BHD: Type E1 (Mountings with Through Holes)

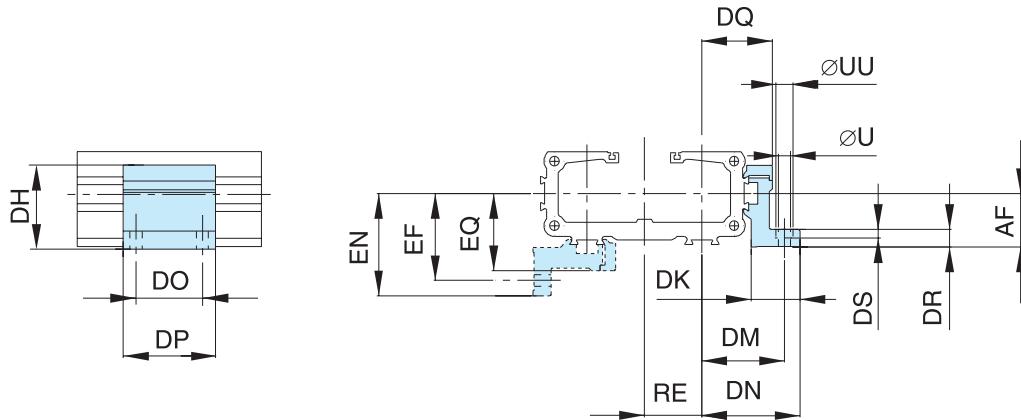

Series OSP-E20BHD to E50BHD: Type D1 (Mountings with Internal Thread)

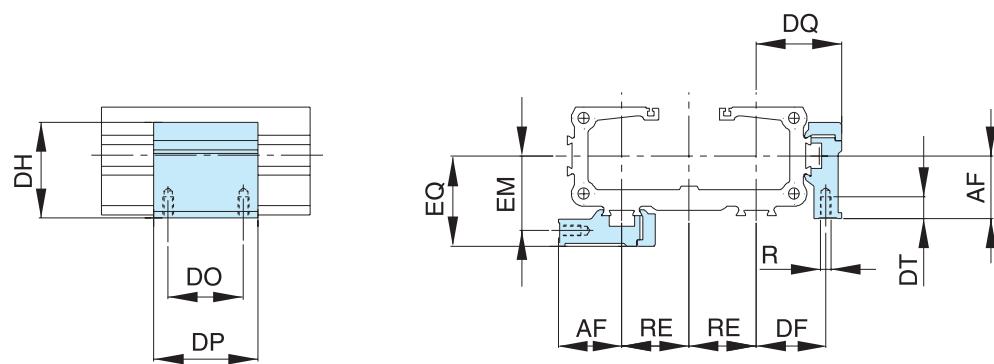

Dimension [mm] and Order Instructions

Series	R	U	UU	AF	DF	DH	DK	DM	DN	DO	DP	DQ	DR	DS	DT	EF	EM	EN	EQ	RE	Order No.	
																					Type E1	Type D1
OSP-E20	M5	5.5	10	22	20.5	38	26	33.5	41.0	36	50	28.0	8	5.7	10	41.1	28.1	48.6	35.6	23	20009FIL	20008FIL
OSP-E25	M5	5.5	10	22	27.0	38	26	40.0	47.5	36	50	34.5	8	5.7	10	41.5	28.5	49.0	36.0	26	20009FIL	20008FIL
OSP-E32	M5	5.5	10	30	33.0	46	27	46.0	54.5	36	50	40.5	10	5.7	10	48.5	35.5	57.0	43.0	32	20158FIL	20157FIL
OSP-E50	M6	7.0	-	48	40.0	71	34	59.0	67.0	45	60	52.0	10	-	11	64.0	45.0	72.0	57.0	44	15536FIL	15534FIL

Profile Mounting

OSP-E..B, ST, SB


Size 25, 32, 50

Note on Types E1 and D1:

The profile mounting can also be mounted on the underside of the actuator, in which case its distance from the centre of the actuator is different. Stainless steel version on request.


Series OSP-E25, E32, E50, Type E1

(Mountings with Through Holes)

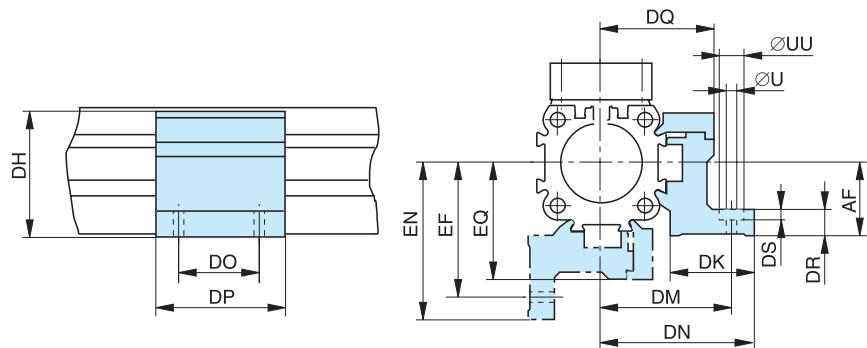

Series OSP-E25, E32, E50, Type D1

(Mountings with Internal Thread)

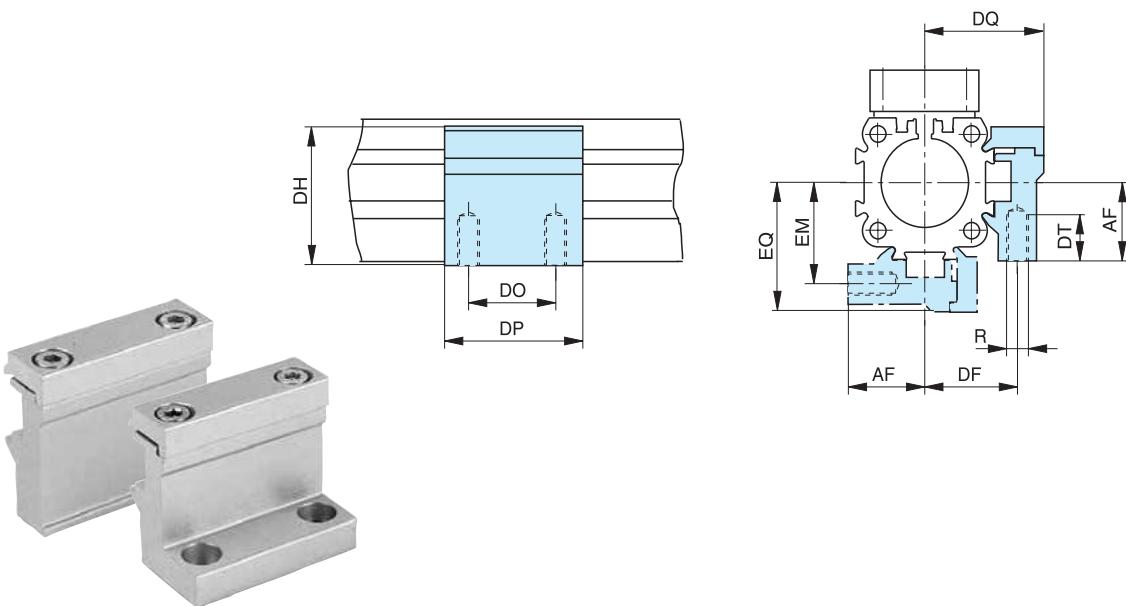

Dimension [mm] and Order Instructions

Series	R	U	UU	AF	DF	DH	DK	DM	DN	DO	DP	DQ	DR	DS	DT	EF	EM	EN	EQ	Order No.	
																				Type E1	Type D1
OSP-E25	M5	5.5	10	22	27	38	26	40	47.5	36	50	34.5	8	5.7	10	41.5	28.5	49	36	20009FIL	20008FIL
OSP-E32	M5	5.5	10	30	33	46	27	46	54.5	36	50	40.5	10	5.7	10	48.5	35.5	57	43	20158FIL	20157FIL
OSP-E50	M6	7.0	-	48	40	71	34	59	67.0	45	60	52.0	10	-	11	64.0	45.0	72	57	20163FIL	20162FIL

OSP-E Adaptor Profile OSP

Size 25, 25, 32, 50





- A universal attachment for mounting of additional items
- Solid material



The mountings are supplied singly.

Series OSP-E25 to E50

OSP-E..B,..SB,..ST,..SBR,..STR

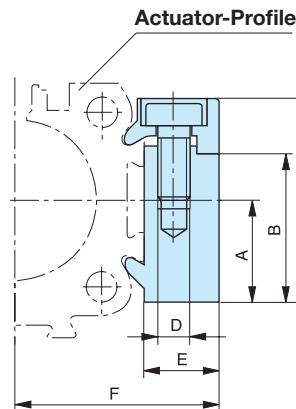

Series OSP-E20BHD to E50BHD

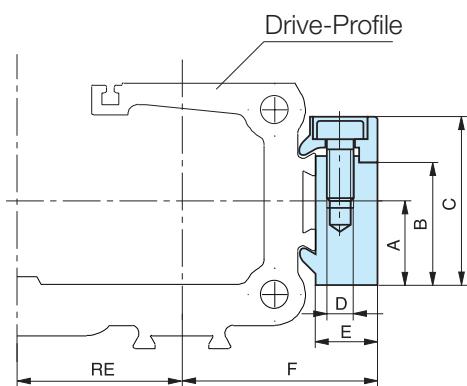

Dimension [mm] and Order Instructions

Series	A	B	C	D	E	F	L	X	RE	Order No. Standard	Stainless
OSP-E20	16.0	23.0	32.0	M5	10.5	24.0	50.0	36.0	23.0	20006FIL	20186FIL
OSP-E25	16.0	23.0	32.0	M5	10.5	30.5	50.0	36.0	26.0	20006FIL	20186FIL
OSP-E32	16.0	23.0	32.0	M5	10.5	36.5	50.0	36.0	32.0	20006FIL	20186FIL
OSP-E50	20.0	33.0	43.0	M6	14.0	52.0	80.0	65.0	44.0	20025FIL	20267FIL

Series OSP-E T-Slot OSP


Size 20, 25, 32, 50

- An universal attachment for mounting with standard T-nuts.




Series OSP-E25 to E50

OSP-E..B,..SB,..ST,..SBR,..STR

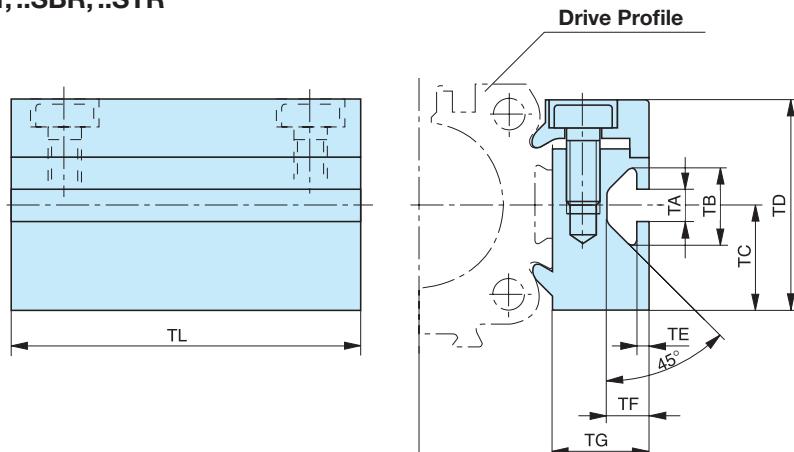

Series OSP-E20BHD to E50BHD

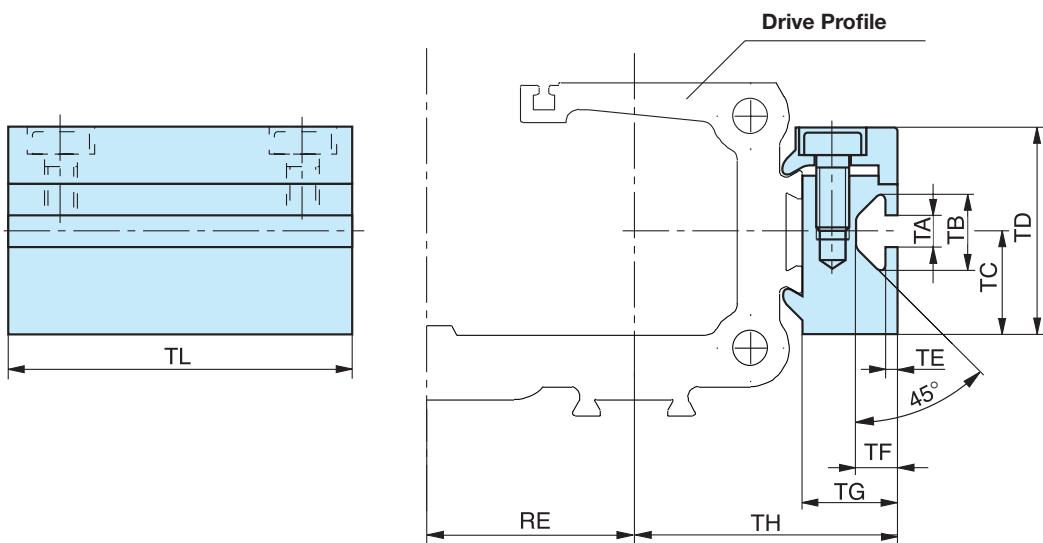

Dimension [mm] and Order Instructions

Series	RE	TA	TB	TC	TD	TE	TF	TG	TH	TL	Order No.	Standard	Stainless
OSP-E20	23	5.0	11.5	16	32	1.8	6.4	14.5	28	50	20007FIL	20187FIL	
OSP-E25	26	5.0	11.5	16	32	1.8	6.4	14.5	34.5	50	20007FIL	20187FIL	
OSP-E32	32	5.0	11.5	16	32	1.8	6.4	14.5	40.5	50	20007FIL	20187FIL	
OSP-E50	44	8.2	20.0	20	43	4.5	12.3	20.0	58.0	80	20026FIL	20268FIL	

Adaptor Profile


Size 25, 32, 50
to connect

- **OSP-E with System Profiles**
- **OSP-E with Series OSP-E or OSP-P**

The mountings are supplied singly.



Adaptor Profile

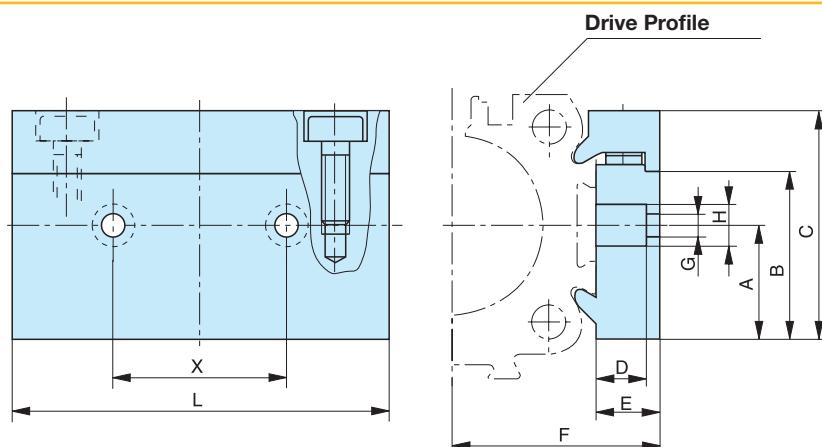

Dimension [mm] and Order Instructions


Series	for the connection to the driver of	A	B	C	D	E	F	G	H	L	X	Order No.
OSP-E25	OSP32-50	16	23	32	8.5	10.5	30.5	6.6	11	60	27	20850FIL
OSP-E32	OSP32-50	16	23	32	8.5	10.5	36.5	6.6	11	60	27	20850FIL
OSP-E50	OSP32-50	20	33	43	8.0	14.0	52	6.6	11	60	27	20851FIL

Connecting Possibilities

Verbindung von Series OSP-E mit Systemprofilen



Verbindung von Series OSP-E mit Series OSP-E/OSP-P

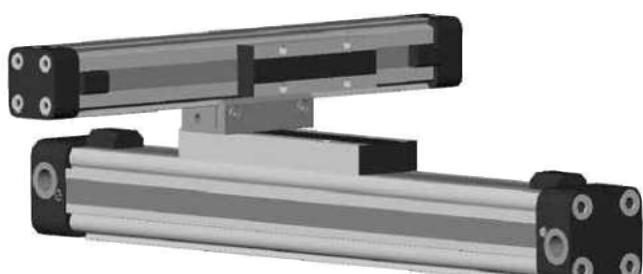

Clevis Mounting

OSP-E..B Belt Actuator with Internal Plain Bearing Guide

OSP-E..SB, ..ST Screw Actuator with Internal Plain Bearing Guide

Size 25, 32, 50

When external guides are used, parallelism deviations can lead to mechanical strain on the piston. This can be avoided by the use of a compensation.



Freedom of movement is provided as follows:

- Tilting in Direction of Movement
- Vertical Compensation
- Tilting Sideways
- Horizontal Compensation

A stainless steel version is also available.




Series OSP-E25 to E32

OSP-E..B, ..SB, ..ST

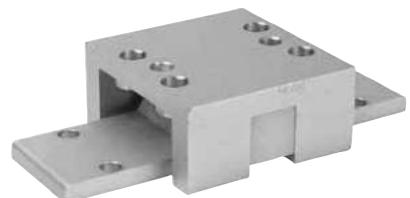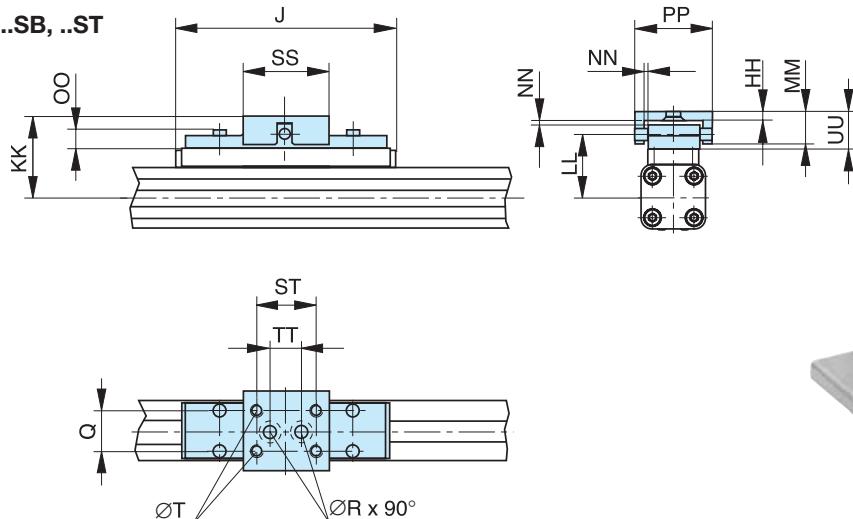

Series OSP-E50

OSP-E..B, ..SB, ..ST

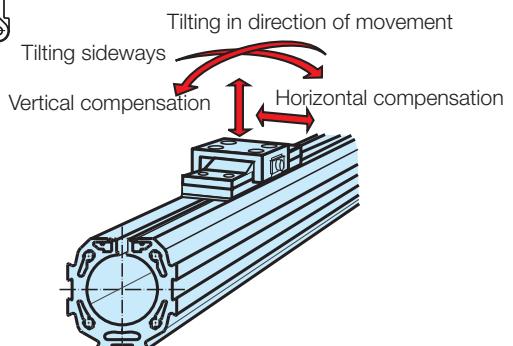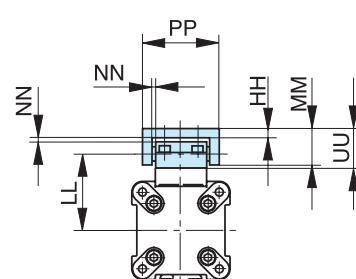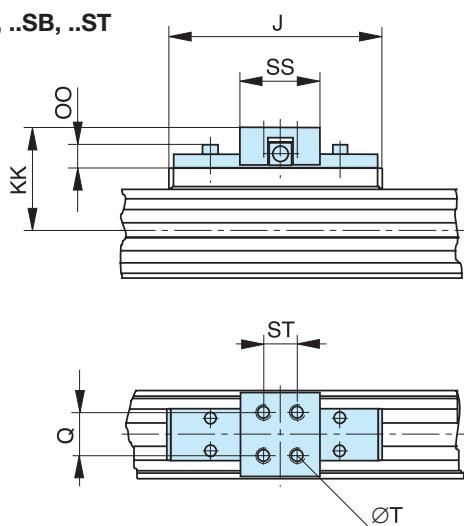

Dimension [mm]

Series	J	Q	T	ØR	HH	KK	LL	MM	NN*	OO	PP	SS	ST	TT	UU	Order No. Standard	Stainless
OSP-E25	117	16	M5	5.5	3.5	52	39	19	2	9	38	40	30	16	21	20005FIL	20092FIL
OSP-E32	152	25	M6	6.6	6.0	68	50	28	2	13	62	60	46	40	30	20096FIL	20094FIL
OSP-E50	200	25	M6	-	6.0	79	61	28	2	13	62	60	46	-	30	20097FIL	20095FIL

*Dimension NN gives the possible plus and minus play in horizontal and vertical movement, which also makes tilting sideways possible.






Clevis Mounting, Low Back Lash**OSP-E..B Belt Actuator with Internal Plain Bearing Guide****OSP-E..SB, ..ST Screw Actuator with Internal Plain Bearing Guide****Size 25, 32, 50**

When external guides are used, parallelism deviations can lead to mechanical strain on the piston. This can be avoided by the use of a clevis mounting. In the drive direction the clevis mounting has a low backlash fit.


Freedom of movement is provided as follows:

- Tilting in Direction of Movement
- Vertical Compensation
- Tilting Sideways
- Horizontal Compensation

A stainless steel version is also available.

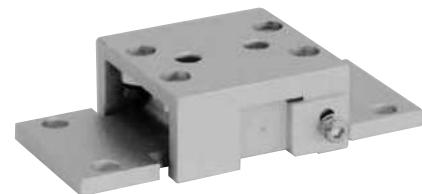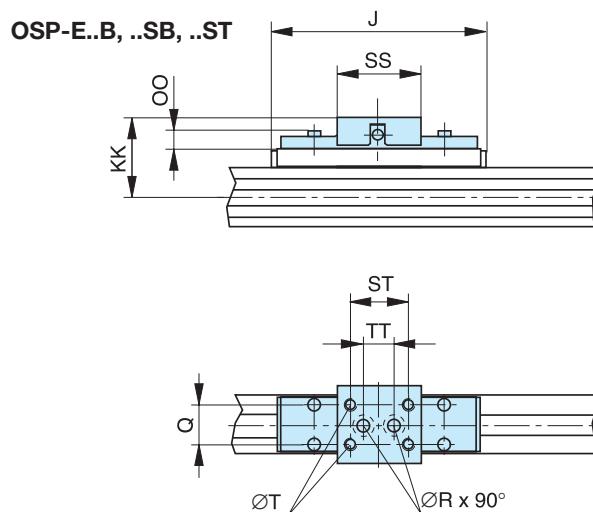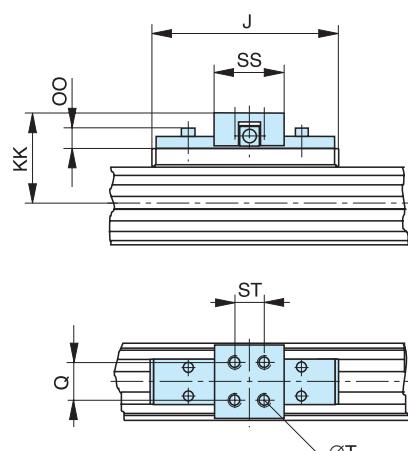Series OSP-E25 to E32**Series OSP-E50**

Tilting in direction of movement
Tilting sideways
Vertical compensation
Horizontal compensation

**Dimension [mm]**

Series	J	Q	T	ØR	HH	KK	LL	MM	NN*	OO	PP	SS	ST	TT	UU	Order No.	Standard	Stainless
OSP-E25	117	16	M5	5.5	3.5	52	39	19	2	9	49	40	30	16	21	20496FIL	20498FIL	
OSP-E32	152	25	M6	6.6	6.0	68	50	28	2	13	69	60	46	40	30	20497FIL	20499FIL	
OSP-E50	200	25	M6	-	6.0	79	61	28	2	13	69	60	46	-	30	20812FIL	20818FIL	

*Dimension NN gives the possible plus and minus play in horizontal and vertical movement, which also makes tilting sideways possible.

Inversion Mounting

OSP-E..B Belt Actuator with Internal Plain Bearing Guide

OSP-E..SB, ..ST Screw Actuator with Internal Plain Bearing Guide

Size 25, 32, 50

In dirty environments or where there are special space problems, inversion of the cylinder is recommended. The inversion bracket transfers the driving force to the opposite side of the cylinder. The size and position of the mounting holes are the same as on the standard cylinder.


Please note:

Other components of the OSP system such as **profile mountings, magnetic** switches can still be mounted on the free side of the cylinder.

Important Note: May be used in combination with compensation, ref. dimensions in page 93 / 94.


Series OSP-E25 to E32

OSP-E..B, ..SB, ..ST

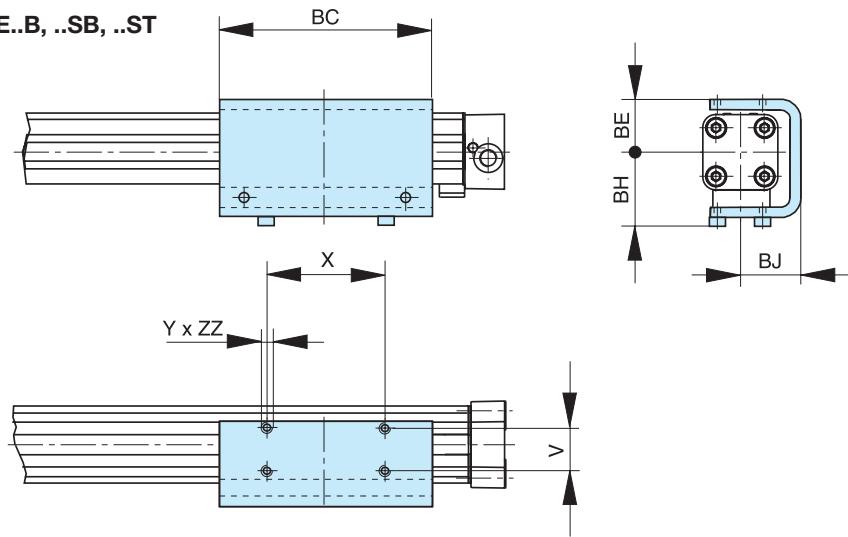

Series OSP-E50

OSP-E..B, ..SB, ..ST

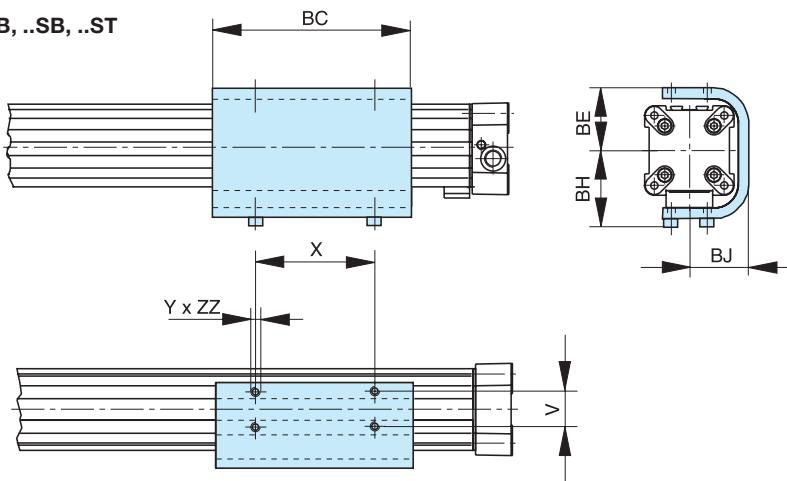

Dimension [mm] and Order Instructions

Series	V	X	Y	BC	BE	BH	BJ	ZZ	Order No.
OSP-E25	25	65	M5	117	31	43	33.5	6	20037FIL
OSP-E32	27	90	M6	150	38	51	39.5	6	20161FIL
OSP-E50	27	110	M6	200	55	65	52	8	20166FIL

Overview for Linear Drive Acutators OSP-E with OSP-Guides**OSP-E..B Belt Acutator with Internal Plain Bearing Guide****OSP-E..SB, ..ST Screw Actuator with Internal Plain Bearing Guide****Overview**

Type of Mounting	Type	Versions - OSP-Guide									
		SLIDELINE	PROLINE	MULTIBRAKE	POWERSLIDE						
		25	32	50	25/25	25/35	25/44	32/35	32/44	50/60	50/76
End Cap Mounting	Type A1										
	Type A2	O	O								
	Type A3				O	O		O			
End Cap Mounting reinforced	Type B1	X	X		X	X	X	X	X		
	Type B3										
	Type B4						O		O		
End Cap Mounting	Type C1			X						X	X
	Type C2			O							
	Type C3									O	
	Type C4										O
Mid-Section Support Narrow	Type D1	X	X	X	X	X	X	X	X	X	X
	Type E1	X	X	X	X	X	X	X	X	X	X
Mid-Section Support Wide	Type E2	O	O	O							
	Type E3				O	O		O		O	
	Type E4					O		O		O	

X = mounting position carriage top (12 clock position)

O = mounting position carriage side (3 or 9 clock position)

■ = available components


*** Please note:**

With series OSP-E-spindle the end cap mountings A, B and C can only be fitted to the side opposite to the drive shaft.
On the side of the drive shaft we recommend to use our profile mountings (page 89ff).

End Cap Mounting



Series OSP – E25, E32: Type A

OSP-E..B,..SB,..ST

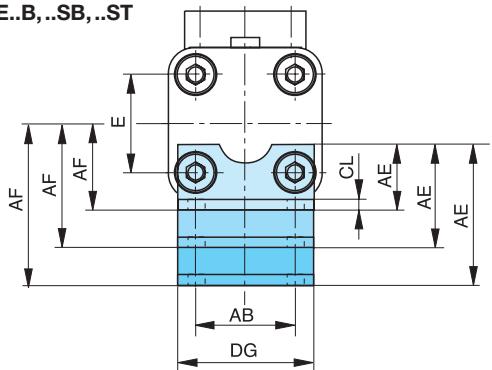

Series OSP – E25, E32: Type B

OSP-E..B,..SB,..ST

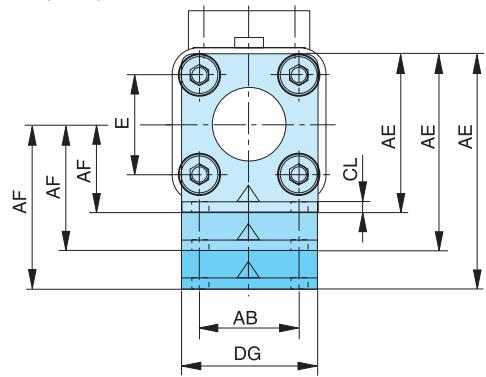

At the end face of each end caps there are four holes with internal threads to fix the drive. The hole layout is square so that the drive can be fitted on the bottom, the top or either side.



Material:

Series OSP-25, 32: steel, zinc galvanized series

OSP-50: Aluminium, anodized.

The mountings are supplied in pairs.

Series OSP – E50: Type C

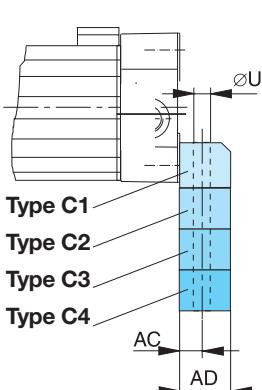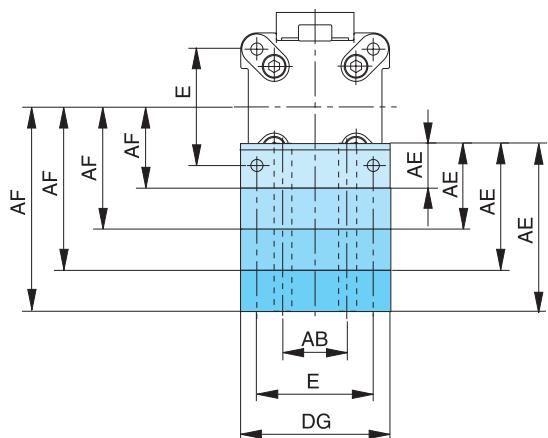

Dimension [mm]

- AE and AF

(depending on type of mounting)

Type of mount.	Dimension AE			Dimension AF		
	at Size			at Size		
	25	32	50	25	32	50
A1	18	20	-	22	30	-
A2	33	34	-	37	44	-
A3	45	42	-	49	52	-
B1	42	55	-	22	30	-
B3	-	-	-	-	-	-
B4	80	85	-	60	60	-
C1	-	30	-	-	-	48
C2	-	39	-	-	-	57
C3	-	54	-	-	-	72
C4	-	77	-	-	-	95



Dimension [mm]

Series	E	øU	AB	AC	AD	CL	D
OSP-E25	27	5,8	27	16	22	2,5	39
OSP-E32	36	6,6	36	18	26	3,0	50
OSP-E50	70	9,0	40	12,5	24	-	86

Profile Mounting

Series OSP-E25, E32, E50: Type E (mounting with through hole)

OSP-E..B, ..SB, ..ST, ..SBR, ..STR

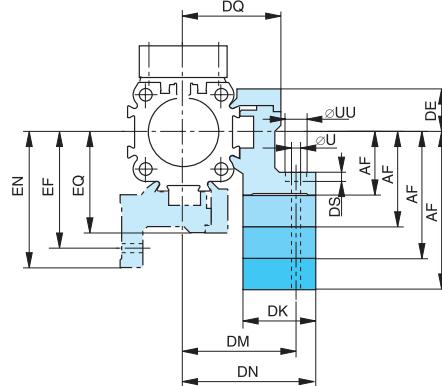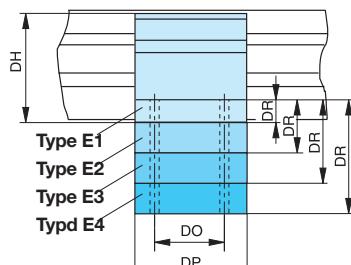

Information on type E1 and D1:

The Profile Mountings can also be fitted to the bottom side of the drive. In this case please observe the new centre line dimensions of the drive. For layout information please refer to the page 70 ff.

Stainless version on request.

Dimension [mm]



- DR and AF (depending on type of mounting)

Bef.- Art	Dimension DR at Size	Dimension AF at Size
	25	32
D1	-	-
E1	8	10
E2	23	24
E3	35	32
E4	46	40
	50	50
	25	32
	32	32
	50	50

Series OSP-E25, E32, E50: Type D1

(mounting with internal thread)

OSP-E..B, ..SB, ..ST, ..SBR, ..STR



Dimension [mm]

Series	R	U	UU	DE	DF	DH	DK	DM	DN	DO	DP	DQ	DS	DT	EF	EM	EN	EQ
OSP-E25	M5	5,5	10	16	27	38	26	40	47,5	36	50	34,5	5,7	10	41,5	28,5	49	36
OSP-E32	M5	5,5	10	16	33	46	27	46	54,5	36	50	40,5	5,7	10	48,5	35,5	57	43
OSP-E50	M5	7	-	23	40	71	34	59	67	45	60	52	-	11	64	45	72	57

Order Instructions for Mountings Type A - Type B - Type C - Type D - Type E

Type of mountings (Versions)	Order No. Size		
	25	32	50
A1¹⁾	2010FIL	3010FIL	-
A2¹⁾	2040FIL	3040FIL	-
A3¹⁾	2060FIL	3060FIL	-
B1¹⁾	20311FIL	20313FIL	-
B3¹⁾	-	-	-
B4¹⁾	20312FIL	20314FIL	-
C1¹⁾	-		5010FIL
C2¹⁾	-		20349FIL
C3¹⁾	-		20350FIL
C4¹⁾	-		20351FIL
D1²⁾	20008FIL	20157FIL	20162FIL
E1²⁾	20009FIL	20158FIL	20163FIL
E2²⁾	20352FIL	20355FIL	20361FIL
E3²⁾	20353FIL	20356FIL	20362FIL
E4²⁾	20354FIL	20357FIL	20363FIL



¹⁾ The mountings are supplied in pairs. ²⁾ The mountings are supplied simply.

Magnetic Field Sensors

Type P8S-G

The new generation of t-slot sensors convince with easy mounting avoiding special tools and with a drop-in mounting. Due to new electronic the hysteresis is very small and allows a very accurate switching point.

Magnetic Field Sensors are used for contactless electric sensing of the carrier position, e.g. for end or homing positions of a linear actuator. The field of magnets mounted as standard into the carriage activate the sensor.



Connection Examples

Load with protective circuits

- (a) Protective resistor for light bulb
- (b) Freewheel diode on inductivity
- (c) Varistor on inductivity
- (d) RC element on inductivity

For the type ES, external protective circuits are not normally needed.

Elektric Service Life, Protective Measures

Type RS magnetic sensors are sensitive to excessive currents and inductions. With high switching frequencies and inductive loads such as relays, solenoid valves or lifting magnets, service life will be greatly reduced.

With resistive and capacitative loads with high switch-on current, such as light bulbs, a protective resistor should be fitted. This also applies to long cable lengths and voltages over 100 V.


In the switching of inductive loads such as relays, solenoid valves and lifting magnets, voltage peaks (transients) are generated which must be suppressed by protective diodes, RC loops or varistors.

Carriage Speed/Reaction Time

Carriage speed and switching distance affect signal duration and should be considered in conjunction with the minimum reaction time of ancillary control equipment.

In accordance to this, the contact travel must be included in the calculation.

$$\text{Min. reaction time} = \frac{\text{Switching Distance}}{\text{Piston Speed}}$$



Order No.

Magnetic Sensor Set for OSP-E..BV

2 Magnetic sensor, Reed NC (2-wire), 1 mounting rail, 2 magnets

18210FIL

Connection Cables, Suitable for Cable Chain

M8 Plug with 5 m Cable

KL3186*

M8 Plug with 10 m Cable



KL3217*

M8 Plug with 15 m Cable

KL3216*


* Detailed specifications for KL-Series on request.

Magnetic Field Sensors


Series	P8S-G ¹⁾ - insertable into T-Slot from top											
Type	M8R ²		FL ³		M8R ²		FL ³					
												
CE, cULus, RoHs												
Output Function	0,3m Cable	3m Cable	10m Cable		0,3m Cable	3m Cable	10m Cable					
PNP	NO NC	P8S-GPCHX P8S-GQCHX	P8S-GPFAX P8S-GQFAX	P8S-GPFDX P8S-GQFDX								
NPN	NO NC	P8S-GNCHX P8S-GMCHX	P8S-GNFAX P8S-GMFAX	P8S-GNFDX P8S-GMFDX								
REED	NO NC				P8S-GRCHX P8S-GECNX	P8S-GRFAX P8S-GEFFX	P8S-GRFDX P8S-GEFRX					
Technical Data	Electrical				Reed							
Electrical Characteristics												
Electric Configuration	3-pole				2-pole							
Indicator LED yellow	yes				yes (not NC)							
Operating Voltage U _b [V]	10 - 30 DC				10 - 30 AC/DC							
Ripple of U _b [%]	≤ 10				≤ 10							
Voltage Drop U _d [V]	≤ 2				≤ 3							
Power Consumption ⁴⁾ [mA]	≤ 10											
Continous Current I _a [mA]	≤ 100				≤ 500 (NO ≤ 100)							
Max. Switching Capacity [W]	≤ 6				≤ 10							
Switchable Capacity Load @ 100W @ 24VDC [nF]					100							
Switching Frequency [Hz]	≤ 1.000				≤ 400							
Time delay before availability [ms]	0.5 / 0.5				1.5 / 0.5							
Sensitivity [mT]	2,8				3							
Hysteresis [mT]	0,7				≥ 0,2							
EMC ⁶⁾	yes				yes							
Lifetime	unlimited				≥ 20*10 ⁶ Cycles							
Short Circuit Protection ⁵⁾ , Reverse Polarity Protection, Power-Up Pulse Suppression, Protection for Inductive Load	yes											
ATEX Version	on request											
Mechanical Characteristics												
Housing	PA12											
Cable Type	PUR / black											
Cable Cross Section [mm ²]	Connector 3-pole	3 x 0,14	3 x 0,14	Connector 3-pole	2 x 0,14	2 x 0,14						
Bending Radius Fixed Installation [mm]	≥ 30											
Bending Radius Moving [mm]	≥ 45											
Shock Resistance												
Protection ⁷⁾ [IP]	67											
Ambient Temperature Range T _a [°C]	-25 ... +75											
Shock ⁸⁾ / Vibration ⁹⁾	30 g, 11 ms / 10 to 55 Hz, 1 mm											

¹⁾ without OSP-E..STR²⁾ plug M8 with rotatable nut³⁾ Cable with Flying Leads⁴⁾ unloaded U_b = 24V⁵⁾ clocked⁶⁾ to EN 60529⁷⁾ to EN 60529⁸⁾ to EN 60068-2-27⁹⁾ to EN 60068-2-6


Switching Function and Electrical Connection

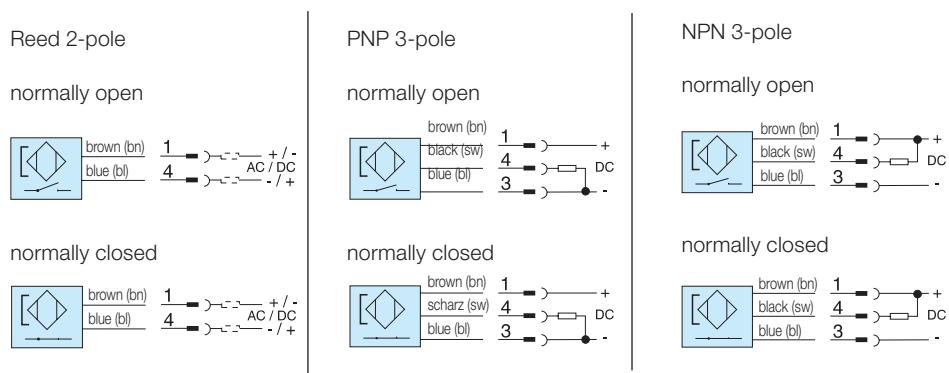


Dimensions [mm] - Type P8S

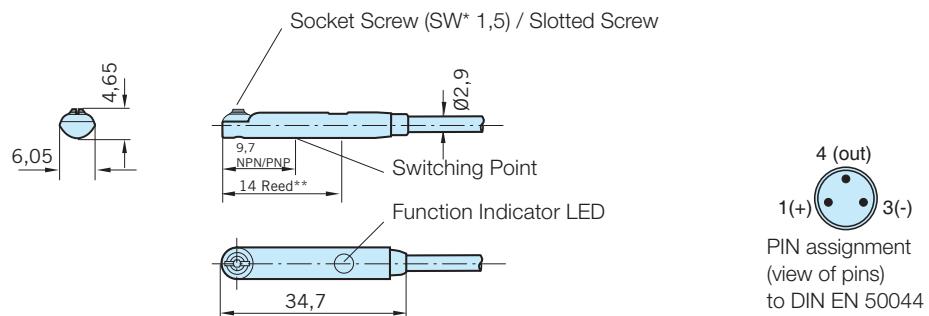

P8S... cable with flying leads




P8S... plug M8, rotatable




* = Wrench Size
** = Switching Point Reed

Installation for T-Slot Sensors

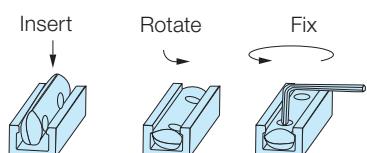


Installation for Dove Tail Groove

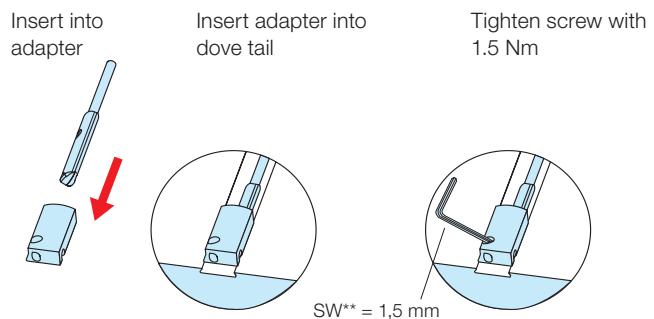


*Adapter included in scope of supply of magnetic sensors P8S.
**= Wrench Size

Position of Magnetic Sensors / Permanent Magnets OSP-E..BHD




Drive Shaft Option = 0*




Drive Shaft Option = 1*

Bi-parting Version



Drive Shaft Option = 2*




Drive Shaft Option = 3*


* Drive shaft order code BHD page 24

When arranging the magnetic sensors, please mind the position of the magnets integrated in the carrier as a function of the operating direction. „M“ indicates where magnet is fitted in carrier.

Dimensions for Magnetic Sensor Set Series OSP-E..BV

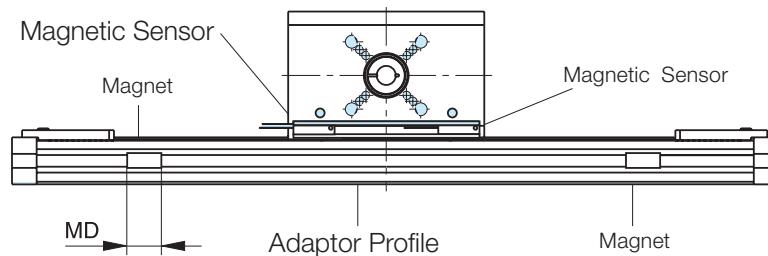

The magnetic sensor as well as the magnet can be fitted to either side

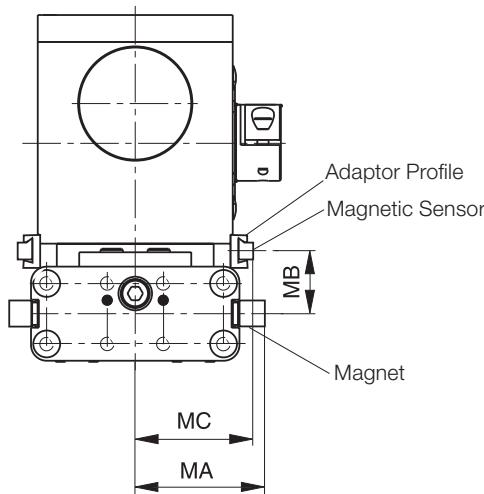

Magnetic sensors and magnets are externally fitted to the OSP-E..BV. For this purpose please order the magnetic sensor set (consisting of 2 magnetic sensors, 1 fastening rail and 2 magnets) for contactless position sensing.

Position Measuring System SFI Plus

ORIGA-Sensoflex (incremental displacement measuring system)

Series SFI-plus

- **OSP-E..SB**

Ball Screw Acuator with Internal Plain Bearing Guide

- **OSP-E..ST**

Trapezoidal Screw Acuator with Internal Plain Bearing Guide



Special Properties

- Contactless, Magnetic Displacement Measuring System
- Freely Selectable Displacement Length up to 32 m
- Resolution 0.1 mm
- Displacement Speed up to 10 m/s
- Suited for Linear and Gyroscopic Movements
- For Almost all Control and Display Units with Suitable Counter Input

The magnetic displacement measuring system

SFI-plus consists of 2 main components:

- **Measuring Scale**

self-adhesive, magnetic measuring scale

- **Sensing Head**

converts the magnetic poles into electric signals which are then processed by counter inputs downstream (e.g. PLC, PC, digital counters)

Series SFI- Plus SensoFlex Incremental

Type	21210FIL
Output Function	
Resolution [mm]	0.1 / 1 Flank Evaluation
Pole Length Scale [mm]	5
Max. Speed [m/s]	10
Repeating Accuracy	± 1 Increment
Distance Sensor / Scale [mm]	2
Switching Output	Push-Pull
Electric Characteristics	
Operating Voltage U_b [V DC]	10 - 30
Voltage Drop [V]	≤ 2
Continuous Current per Output [mA]	≤ 40
Power Consumption ¹⁾ [mA]	≤ 15
Short-circuit Protection, Reverse Voltage Protection, Protection against Inductive Switch-off Peak	yes
Electrostatic Discharge [kV]	8 kV Contact A, 15 kV without Contact A
Fast Transistor Signals, Burst (DC-Connections) [kV]	1, A - 2, B
Mechanical Characteristics	
Housing	Aluminium
Cable Length [m]	5.0 – Fixed, Open End
Cable Cross-section [mm ²]	6 x 0.14 + 2 x 0.22
Type of Cable	PUR, Black
Bending Radius [mm]	41
Ambient Conditions	
Encapsulation Class ²⁾ [IP]	67
Ambient Temperature Range T_a [°C]	-25 to +85
Shock ³⁾ / Vibration ⁴⁾	(11 ms) 300 m/s ² / (55 Hz to 2000 Hz) 300 m/s ²

¹⁾ U_b = 24V, Switched on, no load

²⁾ according to EN60529


³⁾ according to EN 60068-2-6

⁴⁾ according to EN 60068-2-27

Displacement Measuring System

Dimensions [mm]- Reading Head

* Max. Thread Depth 4 mm

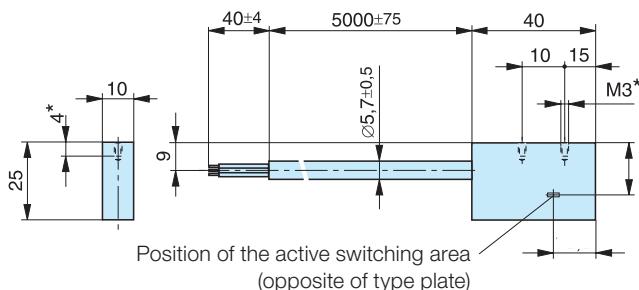

Sensing head

The sensing head supplies two pulsating, 90° out of phase counter signals (phase A/B) with a resolution of 0,4 mm (option 4 mm).

External pulse edge control can improve the resolution to 0.1 mm (option 1 mm). The counting direction automatically results from the phase shift of the counter signal.


Signal Curve - Sensing Head OUT

$U_a = U_e$	Phase B	U_{a1}	0°	<p>0.1 mm (optional 1 mm)</p>
	Phase A	U_{a2}	90°	

Electric Connection

Colour	Designation
bn = brown	+ DC
bl = blue	- DC
bk = black	Phase A
wt = white	Phase B

Dimensions [mm] - in Combination with OSP-E Actuators

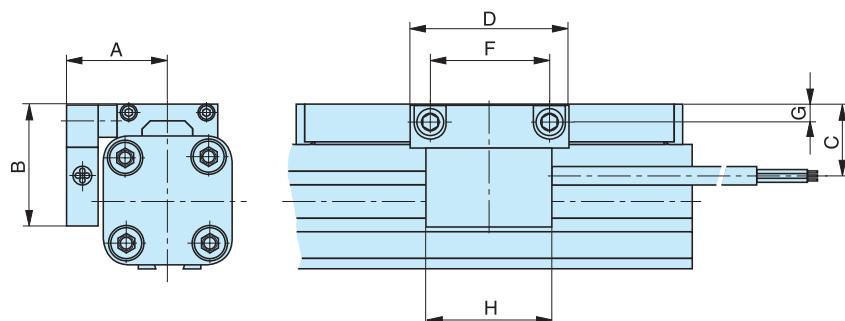

Displacement Measuring System

SFI-plus in connection with electric actuators of series OSP-E..ST

The SFI-plus can be mounted directly to the electric actuator of series OSP-E..ST by means of a special mounting kit.

The position of the sensing head is generally staggered by 90° to the carrier. For later installation a corresponding carrier kit with threaded holes can be ordered.

SFI-plus in connection with electric actuators of series OSP-E..SB

The displacement measuring system in connection with series OSP-E..SB can only be retrofitted, if the system is reconditioned by the manufacturer.



Dimension [mm]

Size	A	B	C	D	F	G	H
OSP-E25SB, ST	32.0	39.0	23.0	50.0	38.0	5.5	40.0
OSP-E32SB, ST	37.5	46.0	30.0	50.0	38.0	6.5	40.0
OSP-E50SB, ST	49.5	55.0	39.0	50.0	38.0	6.5	40.0

Order Instructions

Description	Order No.
Sensing Head with Measuring Scale – Resolution 0,1 mm (please Indicate Scale Length)	21240FIL
Sensing Head – Resolution 0.1 mm (spare part)	21210FIL
Measuring Scale per meter for (to be replaced)	21235FIL
Mounting kit for OSP-P25	21213FIL
Mounting kit for OSP-P32	21214FIL
Mounting kit for OSP-P50	21216FIL

* The overall length of the measuring scale results from the dead length of the actuator and the stroke length. For dead lengths for actuators of series OSP-E see table.

Series	Dead Lengths (mm)
OSP-E25SB, ST	154
OSP-E32SB, ST	196
OSP-E50SB, ST	280

Example:

Actuator OSP-E, Ø25 mm, Stroke 1000 mm

Dead Length + Stroke = Overall Length of the Measuring Scale
154 mm + 1,000 mm = 1,154 mm

Multi-Axis Connection System – Simplifies Engineering and Installation

A completely new system for easy connection of OSP-E actuators in multi-axis systems.

Multi-Axis-Connections

With this highly adaptable system for connection of actuators in multi-axis arrangements, Parker offers design engineers complete flexibility. A wide range of adapter plates, profile mountings and intermediate drive shafts simplify engineering and installation.

The connection system enables actuators to be mounted in carrier to carrier, carrier to profile, carrier to end cap mounting, carrier to end cap.


Developed for the heavy-duty belt drive series OSP-E..BHD, the system provides cross-connection with the same series and also other actuator series in the ORIGA SYSTEM PLUS range.




Adapter Plate Type MA1-..* For connecting carrier to carrier, carrier to profile mounting or carrier to end cap mounting.	Combination C* 	Combination P* 	Combination EM*
	Combination C* 	Combination P* 	Combination EM*
Adapter Plate Type MA2-..* For connecting carrier to end cap	Combination E* 	Combination E* 	Combination E*
	Combination E* 	Combination E* 	Combination E*
Adapter Plate Type MA3-..* For connecting 90° carrier to profile mounting or carrier to end cap mounting.	Combination P* 	Combination P* 	
	Combination P* 	Combination P* 	
Profile Mounting Type MAE-.. 	Combination EM* 	Combination EM* 	
Intermediate Drive Shaft Type MAS-.. 			

Available Mounting Combination


Combination C*






Combination P



Combination E*



Combination EM*



Illustrations show OSP-E..BHD examples

Series	25BHD				32BHD				50BHD				25BV	25B/SB/ST				32B/SB/ST				50B/SB/ST				
	Type	C ¹	P ²	E ³	EM ⁴	C ⁵	P ⁶	E ⁷	EM ⁸	C ⁹	P ¹⁰	E ¹¹	EM ¹²	E ¹¹	C ¹³	P ¹⁴	E ¹⁵	EM ¹⁶	C ¹⁷	P ¹⁸	E ¹⁹	EM ²⁰	C ²¹	P ²²	E ²³	EM ²⁴
OSP-E25BHD	MA1-25	X	X		X	X	X		X						X	X		X	X	X	X	X	X	X		X
OSP-E32BHD	MA1-32	X	X		X	X	X		X	X	X		X						X	X	X	X	X	X		X
OSP-E50BHD	MA1-50	X	X		X	X	X		X	X	X		X						X			X	X	X		X
OSP-E25BHD	MA2-25			X				X																		X
	MA2-32																X									
OSP-E32BHD	MA2-32			X				X				X			X											X
OSP-E50BHD	MA2-50			X				X			X			X		X										X
OSP-E25BHD	MA3-25		X		X		X		X								X		X		X		X		X	X
OSP-E32BHD	MA3-32		X		X		X		X		X		X							X		X		X		X
OSP-E50BHD	MA3-50		X		X		X		X		X		X										X		X	X

Abbreviations:

C = MAN to Carrier

P = MAN to Profile Mounting

E = MAN to End Cap


EM = MAN to End Cap Mounting (n = 1, 2, 3)

* For type OSP-E..SBR/..STR combination P is available only.

Values in superscript refer to corresponding adapter plate dimensions on page 113 ff. E.g. dimensions corresponding to combination option "C" for adapter plate MA1-50 connected to an OSP-E32BHD carrier are shown with superscript number ⁵ on the MA1-50 adapter plate page 115 ff.

Other combinations on request.

Dimensions [mm] Adapter Plate OSP-E 25, Typ: MA1-25

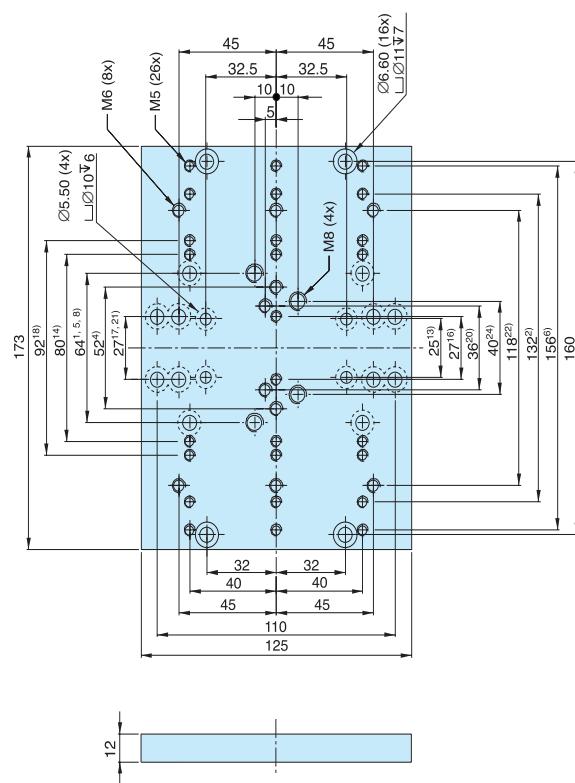


Order Instructions and Weight

Description	Weight (mass)[kg]	Order No.
Adapter Plate Typ MA1-25	0.7	12269FIL

Dimensions with superscript values refer to the corresponding available options detailed on page 114.
e.g. Dimensions with superscript number ⁵ correspond to the option "C" for OSP-E32BHD actuator.



Dimensions [mm] Adapter Plate OSP-E 32, Type: MA1-32

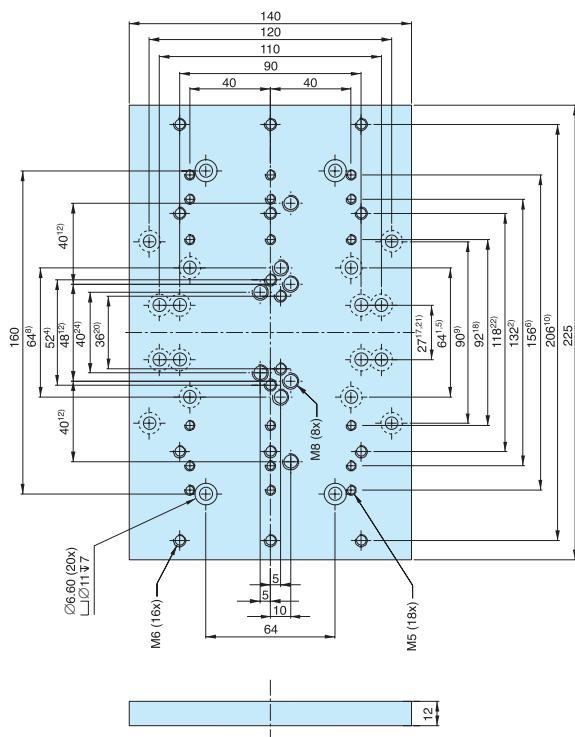


Order Instructions and Weight

Description	Weight (mass)[kg]	Order No.
Adapter Plate Typ MA1-32	1.0	12272FIL

Dimensions with superscript values refer to the corresponding available options detailed on page 114. E.g. dimensions with superscript number ⁵ correspond to the option "C" for OSP-E32BHD actuator.



Dimensions [mm] Adapter Plate OSP-E 50, Type: MA1-50

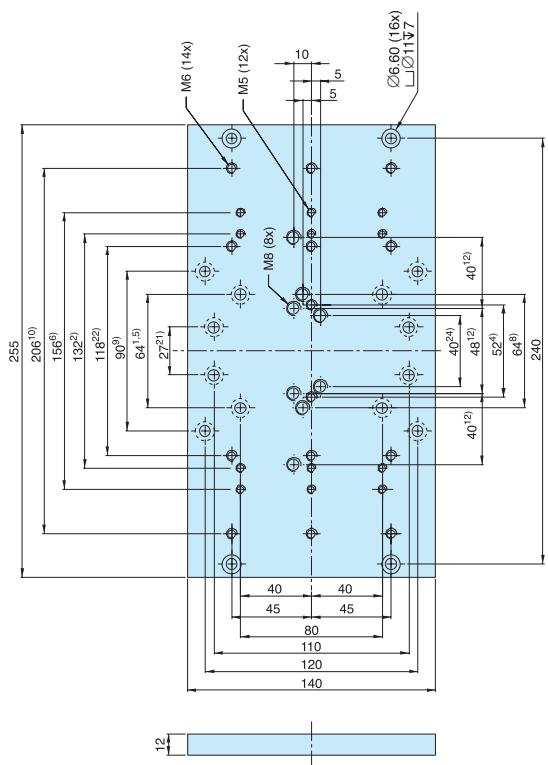


Order Instructions and Weight

Description	Weight (mass)[kg]	Order No.
Adapter Plate Typ MA1-50	1.1	12275FIL

Dimensions with superscript values refer to the corresponding available options detailed on page 114. E.g. dimensions with superscript number ⁵ correspond to the option "C" for OSP-E32BHD actuator.



Dimensions [mm] Adapter Plate OSP-E 25, Type: MA2-25

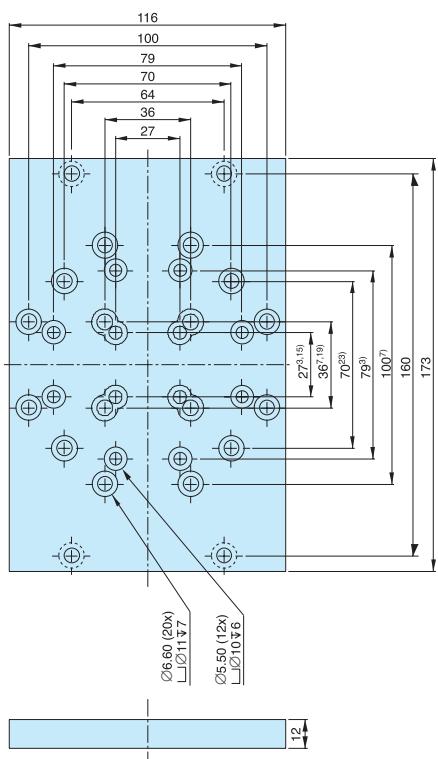


Order Instructions and Weight

Description	Weight (mass)[kg]	Order No.
Adapter Plate Typ MA2-25	0,6	12270FIL

Dimensions with superscript values refer to the corresponding available options detailed on page 114. E.g. dimensions with superscript number ³ correspond to the option "C" for OSP-E32BHD actuator.



Dimensions [mm] Adapter Plate, OSP-E 25/OSP-E32 Type: MA2-32

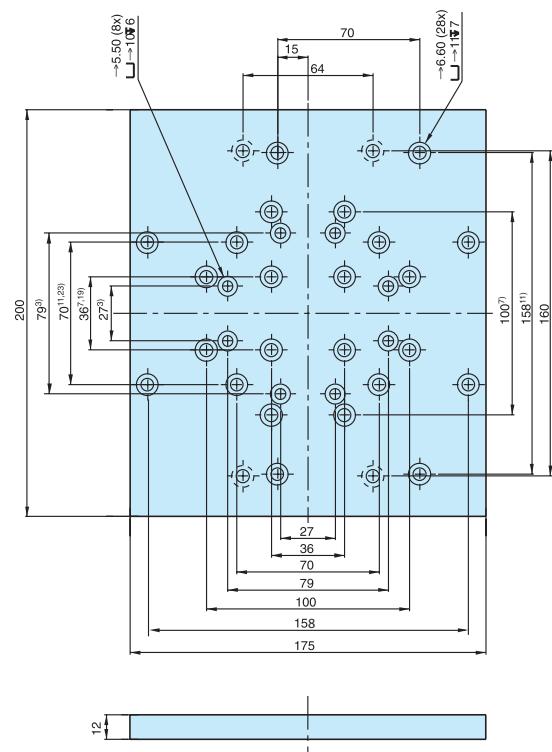


Order Instructions and Weight

Description	Weight (mass) [kg]	Order No.
Adapter Plate Typ MA2-32	1.1	12273FIL

Dimensions with superscript values refer to the corresponding available options detailed on page 114. E.g. dimensions with superscript number ⁴ correspond to the option "EM" for OSP-E25BHD actuator.



Dimensions [mm] Adapter Plate, OSP-E 50, Type: MA2-50

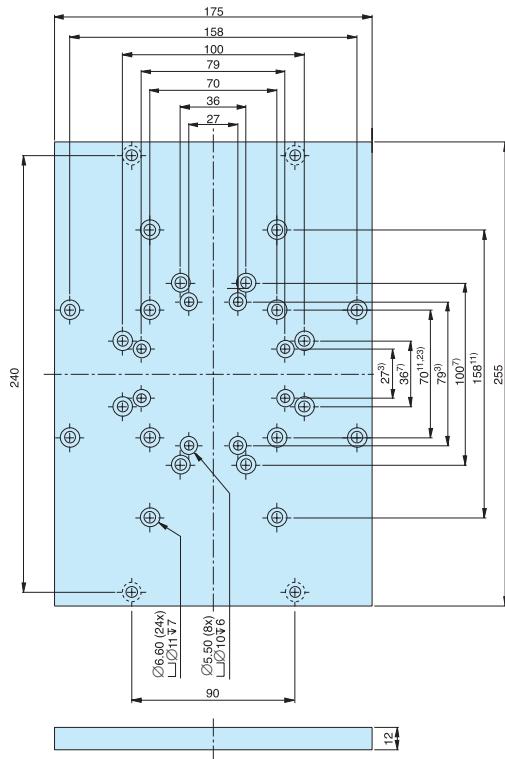

Order Instructions and Weight


Description	Weight (mass)[kg]	Order No.
Adapter Plate Typ MA2-50	1.4	12276FIL

Dimensions with superscript values refer to the corresponding available options detailed on page 114. E.g. dimensions with superscript number ³ correspond to the option "EM" for OSP-E25BHD actuator.



Dimensions [mm] Adapter Plate

OSP-E 50, Type: MA3-25

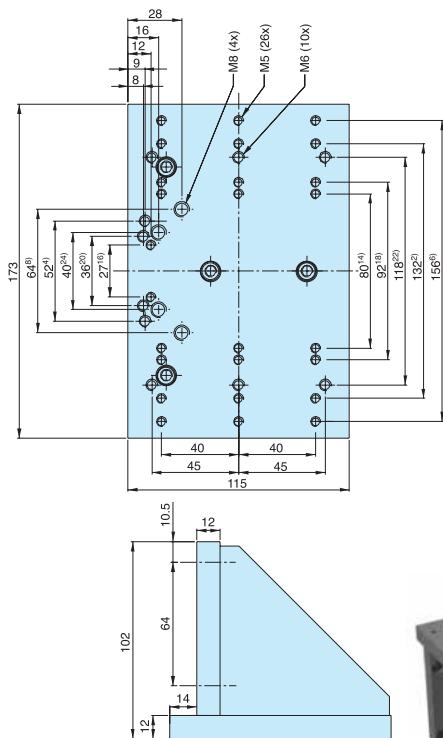


Order Instructions and Weight

Description	Weight (mass) [kg]	Order No. .
Adapter Plate Typ MA3-25	1.3	12271FIL

Dimensions [mm] Adapter Plate

OSP-E 32, Type: MA3-32

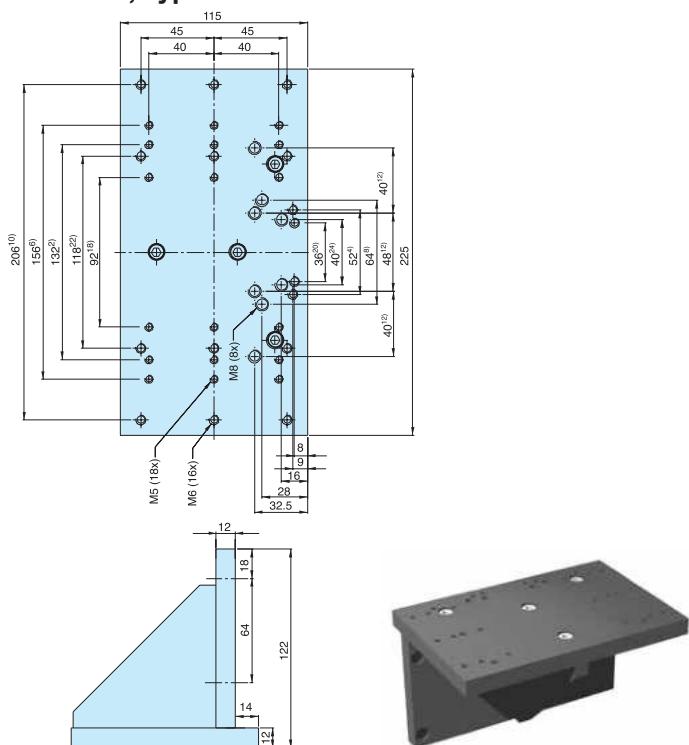



Order Instructions and Weight

Description	Weight (mass)[kg]	Order No. .
Adapter Plate Typ MA3-32	1.8	12274FIL

Dimensions with superscript values refer to the corresponding available options detailed on page 114. E.g. dimensions with superscript number ⁴ correspond to the option "EM" for OSP-E25BHD actuator.

Dimensions [mm] Adapter Plate

OSP-E 50, Type: MA3-50

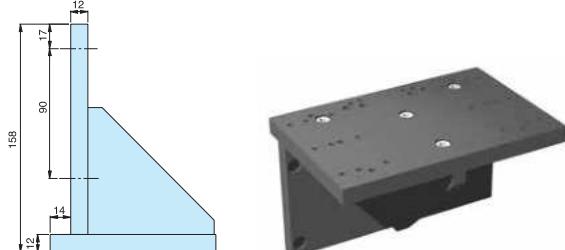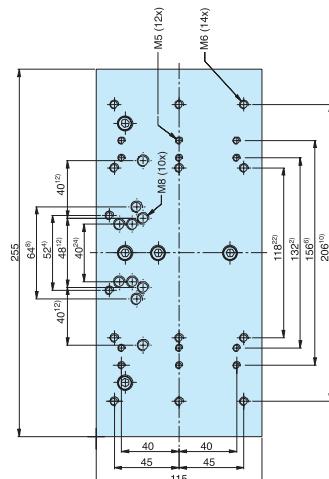

Order Instructions and Weight

Description	Weight (mass) [kg]	Order No. .
Adapter Plate Typ MA3-50	2.3	12277FIL

Complete Intermediate Drive Shaft

Size 20, 25, 32, 50

for Actuator Series OSP-E..BHD

Note:

For Series OSP-E..BHD with integrated gearbox, please contact your local Parker technical support.


Features:

- Backlash-free shaft connection under pre-stress
- Design up to speed 1500 rpm
- Intermediate drive shaft with double coupling for larger displacements of parallel actuators
- Easy to mount


Material:

Aluminium (AL-H) / Steel St-H


Polyurethane/Hytrel

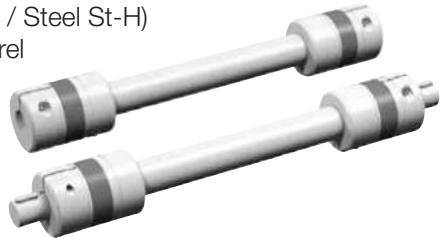


Intermediate Drive Shaft with Clamp Shaft Series OSP-E25BHD to E50BHD, Type MAS-..

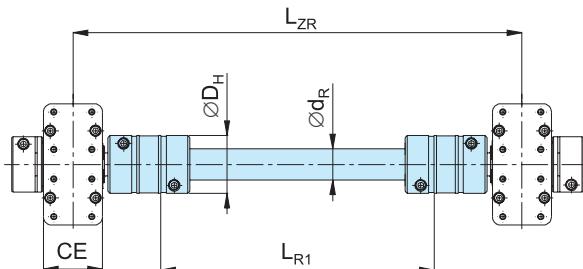

Intermediate Drive Shaft with Plain Shaft and Keyway Series OSP-E25BHD to E50BHD, Type MAS-..

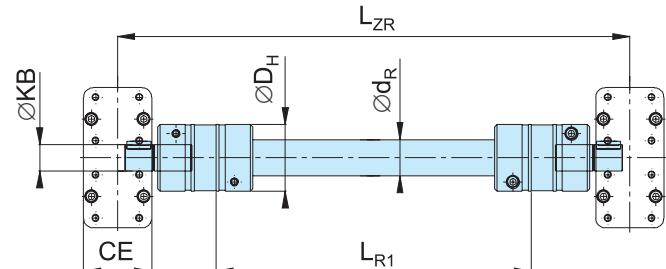

Critical Speed v. for Coupling Length

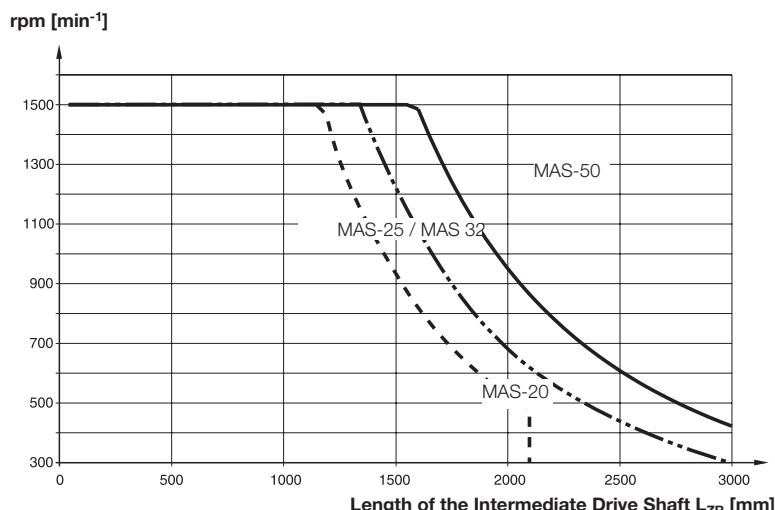

Characteristics / Dimension [mm] and Order Instructions

Series	Type	Max. Torque [Nm] **	CE	DH	KB***	LZR	LR1	dR	Order No. *	
									for clamp shaft for hollow shaft	
OSP-E20BHD	MAS-20	28	38	40	12 _{k6}	< 2100	L _{ZR} - 98	20 x 3,0	16256 - ...	16257 - ...
OSP-E25BHD	MAS-25	39	42	55	16 _{k6}	< 3000	L _{ZR} - 112	25 x 2,5	12305 - ...	12281 - ...
OSP-E32BHD	MAS-32	42	56	55	22 _{k6}	< 3000	L _{ZR} - 126	25 x 2,5	12306 - ...	12282 - ...
OSP-E50BHD	MAS-50	102	87	65	32 _{k6}	< 3000	L _{ZR} - 167	35 x 4,0	12307 - ...	12283 - ...

* Complete with L_{R1} in mm. Example: 12305 - 1200 (Length L_{R1} = 1200 mm)



** For higher torque requirement, please contact your local Parker technical support

*** Other dimensions for KB on request.

Mounting Dimensions for Motor and Gears

Code	Description	A	B*	D	E	F	G
for motor and gears with clearance mounting holes							
A0	SY563T	66.50	M4	38.10	2.50	6.35	21.00
A1	SY873T	99.00	M6	73.00	3.00	9.52	31.50
A2	SMx60 xx xxx 8 11 ...	63.00	M5	40.00	2.50	11.00	23.00
A3	SMx82 xx xx 8 14 ...	100.00	M6	80.00	3.50	14.00	30.00
A4	SMx100 xx xx 5 19...	115.00	M8	95.00	3.50	19.00	40.00
A5	SMx115 xx xx 5 24... / SMx142 xx xx 5 24...	165.00	M10	130.00	3.50	24.00	50.00
A6	SMx115 xx xx 5 28... / SMx142 xx xx 5 28...	165.00	M10	130.00	3.50	28.00	60.00
A7	PS60	70.00	M5	50.00	11.00	16.00	40.00
A8	PS90	100.00	M6	80.00	15.00	22.00	52.00
A9	PS115	130.00	M8	110.00	16.00	32.00	68.00




* size of thread (e.g. M4) or counter bore (e.g. S4) used to mount motor or gear to the flange plate

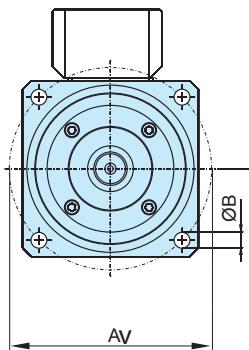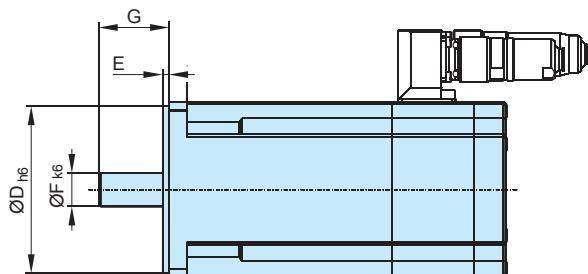

for gears with threaded mounting holes

Code	Description	Ø IM	JG*	Ø GA	HA	Ø F	FL
C0	LP050 / PV40-TA	44.00	S4	35.00	4.00	12.00	24.50
C1	LP070 / PV60-TA	62.00	S5	52.00	5.00	16.00	36.00
C2	LP090 / PV90-TA	80.00	S6	68.00	5.00	22.00	46.00
C3	LP120	108.00	S8	90.00	6.00	32.00	70.00

* size of thread (e.g. M4) or counter bore (e.g. S4) used to mount motor or gear to the flange plate

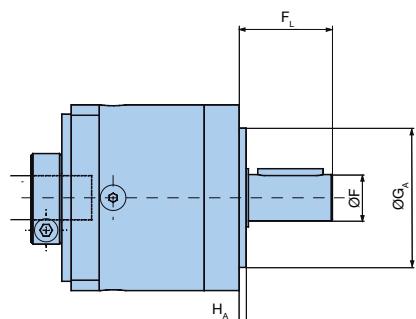

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates, Dubai

Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt

Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt

Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku

Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles

Tel: +32 (0)67 280 900
parker.belgium@parker.com

BG – Bulgaria, Sofia

Tel: +359 2 980 1344
parker.bulgaria@parker.com

BY – Belarus, Minsk

Tel: +48 (0)22 573 24 00
parker.poland@parker.com

CH – Switzerland, Etoy

Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany

Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst

Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup

Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid

Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa

Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve

Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens

Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budaörs

Tel: +36 23 885 470
parker.hungary@parker.com

IE – Ireland, Dublin

Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IL – Israel

Tel: +972 2 45 19 21
parker.israel@parker.com

IT – Italy, Corsico (MI)

Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty

Tel: +7 7273 561 000
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal

Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker

Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw

Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal

Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest

Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow

Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga

Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SL – Slovenia, Novo Mesto

Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul

Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev

Tel: +380 22 573 24 00
parker.poland@parker.com

UK – United Kingdom, Warwick

Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park

Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario

Tel: +1 905 693 3000

US – USA, Cleveland

Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill

Tel: +61 (0)2-9634 7777

CN – China, Shanghai

Tel: +86 21 2899 5000

HK – Hong Kong

Tel: +852 2428 8008

IN – India, Mumbai

Tel: +91 22 6513 7081-85

JP – Japan, Tokyo

Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul

Tel: +82 2 559 0400

MY – Malaysia, Shah Alam

Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington

Tel: +64 9 574 1744

SG – Singapore

Tel: +65 6887 6300

TH – Thailand, Bangkok

Tel: +662 186 7000

TW – Taiwan, Taipei

Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires

Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos Campos

Tel: +55 800 727 5374

CL – Chile, Santiago

Tel: +56 2 623 1216

MX – Mexico, Toluca

Tel: +52 72 2275 4200

European Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)