

# Axial Piston Pumps

Series PVplus  
Variable Displacement



[parker.com/pmde](http://parker.com/pmde)




ENGINEERING YOUR SUCCESS.

| <b>Contents</b>                                     | <b>Page</b> |
|---|-------------|
| Introduction and general Information.....           | 4           |
| Technical Data.....                                 | 5           |
| Ordering Code.....                                  | 6           |
| Pressure Controls.....                              | 18          |
| Remote Pressure Controls .....                      | 20          |
| Load Sensing Controls .....                         | 22          |
| Horse Power/Torque Controls.....                    | 26          |
| Performance Curves.....                             | 30          |
| Electronic P/Q Controls .....                       | 32          |
| Efficiency and Case Drain Flows.....                | 34          |
| Performance Curves and Case Drain Flows PV 360..... | 39          |
| Accessories Control.....                            | 40          |
| Proportional pressure relief valve PVACRE* .....    | 42          |
| Dimensions.....                                     | 44          |
| Pump Dimensions .....                               | 57          |
| Electronic Module PQDXXA.....                       | 61          |
| Electronic Module PQDXXA-PROFINET-Z10.....          | 62          |
| Through Drive, Mounting Kits .....                  | 62          |
| Through Drive, Flange Load Limitation .....         | 63          |
| Multiple Pump Combinations - Maximum Moment.....    | 63          |
| Through Drive, Shaft Load Limitations .....         | 64          |

## With through drive for single and multiple pumps

Swash plate type for open circuit

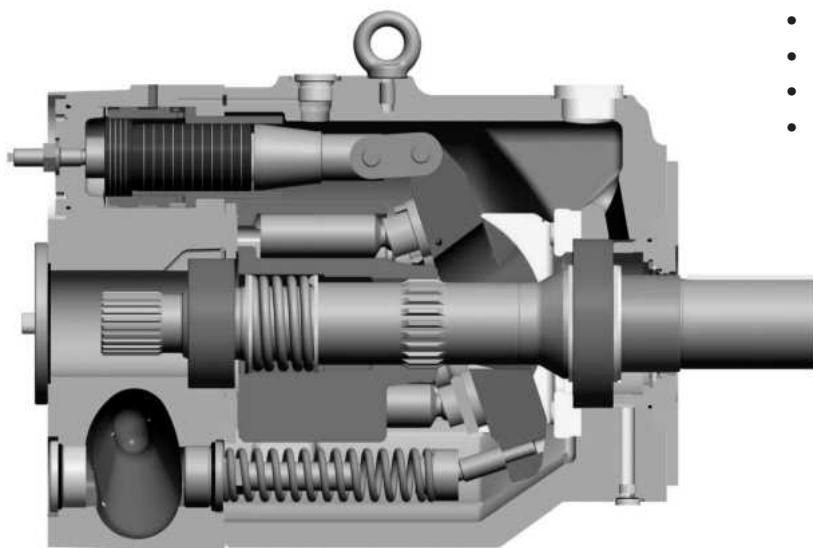

## General Information

### Fluid recommendations

Premium quality hydraulic mineral fluid is recommended, like HLP oils to DIN 51524 (part 2 & 3) or ISO6743/4 (HM & HV). Brugger- value recommended to be 30 N/mm<sup>2</sup> minimum for general application and 50 N/mm<sup>2</sup> for heavily loaded hydraulic equipment and fast cycling machines and/or high dynamic loads, measured in accordance with DIN 51 347-2. See also Document HY30-3248/UK Parker Hydraulic Fluids.

### Viscosity

The normal operating viscosity should range between 16 and 100 mm<sup>2</sup>/s (cSt). Max. start-up viscosity is 1000 mm<sup>2</sup>/s (cSt).

### Filtration

For maximum pump and system component functionality and life, the system should be protected from contamination by effective filtration.

Fluid cleanliness should be in accordance with ISO classification ISO 4406:1999. The quality of filter elements should be in accordance with ISO standards. General hydraulic systems for satisfactory operation: Class 20/18/15, according to ISO 4406:1999

### Technical Features

- Low noise level
- Fast response
- Service-friendly
- High self-priming speed
- Compact design
- Through drive for 100% nominal torque

Recommended cleanliness for maximum component life and functionality: Class 18/16/13, according to ISO 4406:1999

### Seals

Check hydraulic fluid specification for chemical resistance of seal material.

Check temperature range of seal material and compare with max. system and ambient temperature.

|                               |               |
|-------------------------------|---------------|
| N – Nitrile (FKM shaft seal)  | -25...+90 °C  |
| V – FKM (FKM shaft seal)      | -25...+115 °C |
| W – Nitrile (PTFE shaft seal) | -30...+90 °C  |

**Note:** The highest fluid temperature will be at the drain port of the pump, up to 25 °C higher than in the reservoir.

|   |                         | PV016  | PV020  | PV023  | PV028  | PV032  | PV040  | PV046  |
|---|-------------------------|--------|--------|--------|--------|--------|--------|--------|
| Frame size  |                         | 1      | 1      | 1      | 1      | 2      | 2      | 2      |
| Max. Displacement                                     | [cm <sup>3</sup> /rev.] | 16     | 20     | 23     | 28     | 32     | 40     | 46     |
| Output flow at 1500 rpm                               | [l/min]                 | 24     | 30     | 34,5   | 42     | 48     | 60     | 69     |
| Nominal pressure pN                                   | [bar]                   | 350    | 350    | 350    | 350    | 350    | 350    | 350    |
| Min. outlet pressure                                  | [bar]                   | 15     | 15     | 15     | 15     | 15     | 15     | 15     |
| Max. pressure pmax at 20% working cycle <sup>1)</sup> | [bar]                   | 420    | 420    | 420    | 420    | 420    | 420    | 420    |
| Case drain pressure, continuous                       | [bar]                   | 0.5    | 0.5    | 0.5    | 0.5    | 0.5    | 0.5    | 0.5    |
| Case drain pressure, max. peak                        | [bar]                   | 2.0    | 2.0    | 2.0    | 2.0    | 2.0    | 2.0    | 2.0    |
| Min. Inlet pressure, abs.                             | [bar]                   | 0.8    | 0.8    | 0.8    | 0.8    | 0.8    | 0.8    | 0.8    |
| Max. Inlet pressure                                   | [bar]                   | 16     | 16     | 16     | 16     | 16     | 16     | 16     |
| Input power at 1500 rpm and 350 bar                   | [kW]                    | 15.5   | 19.5   | 22.5   | 27.5   | 31     | 39     | 45     |
| Max speed at 1 bar, abs, inlet pressure               | [rpm]                   | 3000   | 3000   | 3000   | 3000   | 2800   | 2800   | 2800   |
| Min. speed  | [rpm]                   | 50     | 50     | 50     | 50     | 50     | 50     | 50     |
| Moment of inertia                                     | [kgm <sup>2</sup> ]     | 0.0017 | 0.0017 | 0.0017 | 0.0017 | 0.0043 | 0.0043 | 0.0043 |
| Weight  | [kg]                    | 19     | 19     | 19     | 19     | 30     | 30     | 30     |

|   |                         | PV063 | PV080 | PV092 | PV140 | PV180 | PV270 | PV360 |
|---|-------------------------|-------|-------|-------|-------|-------|-------|-------|
| Frame size  |                         | 3     | 3     | 3     | 4     | 4     | 5     | 6     |
| Max. Displacement                                     | [cm <sup>3</sup> /rev.] | 63    | 80    | 92    | 140   | 180   | 270   | 360   |
| Output flow at 1500 rpm                               | [l/min]                 | 94.5  | 120   | 138   | 210   | 270   | 405   | 540   |
| Nominal pressure pN                                   | [bar]                   | 350   | 350   | 350   | 350   | 350   | 350   | 350   |
| Min. outlet pressure                                  | [bar]                   | 15    | 15    | 15    | 15    | 15    | 15    | 15    |
| Max. pressure pmax at 20% working cycle <sup>1)</sup> | [bar]                   | 420   | 420   | 420   | 420   | 420   | 420   | 420   |
| Case drain pressure, continuous                       | [bar]                   | 0.5   | 0.5   | 0.5   | 0.5   | 0.5   | 0.5   | 0.5   |
| Case drain pressure, max. peak                        | [bar]                   | 2.0   | 2.0   | 2.0   | 2.0   | 2.0   | 2.0   | 2.0   |
| Min. Inlet pressure, abs.                             | [bar]                   | 0.8   | 0.8   | 0.8   | 0.8   | 0.8   | 0.8   | 0.8   |
| Max. Inlet pressure                                   | [bar]                   | 16    | 16    | 16    | 16    | 16    | 16    | 16    |
| Input power at 1500 rpm and 350 bar                   | [kW]                    | 61.5  | 78    | 89.5  | 136   | 175   | 263   | 350   |
| Max speed at 1 bar, abs, inlet pressure               | [rpm]                   | 2800  | 2500  | 2300  | 2400  | 2200  | 1800  | 1750  |
| Min. speed  | [rpm]                   | 50    | 50    | 50    | 50    | 50    | 50    | 50    |
| Moment of inertia                                     | [kgm <sup>2</sup> ]     | 0.018 | 0.018 | 0.018 | 0.030 | 0.030 | 0.098 | 0.103 |
| Weight  | [kg]                    | 59    | 59    | 59    | 90    | 90    | 172   | 180   |

1) Check adjustment range each compensator.

**P V** **R 1 K 1 T 1 N**

axial piston  
pump  
variable  
displacement

size  
and  
displacement

rotation

mounting  
interface

through  
drive  
code

coupling  
code

seals

control

see next page

| Code | Displacement            | Size |
|------|-------------------------|------|
| 016  | 16 cm <sup>3</sup> /rev | 1    |
| 020  | 20 cm <sup>3</sup> /rev | 1    |
| 023  | 23 cm <sup>3</sup> /rev | 1    |
| 028  | 28 cm <sup>3</sup> /rev | 1    |

| Code | Rotation <sup>1)</sup> |
|------|------------------------|
| R    | Clockwise              |
| L    | Counter clockwise      |

<sup>1)</sup> When looked on shaft

| Code | Variation                                    |
|------|--|
| 1    | Standard                                     |
| 2    | Electronic displacement sensor <sup>2)</sup> |
| 9    | Special adjustment <sup>3)</sup>             |

<sup>2)</sup> not for horse power control

<sup>3)</sup> requires Kxxxx number

| Code | Mounting interface | Shaft                                   |
|------|--------------------|---|
| K    | metr. ISO 3019/2   | 4-hole flange Ø100 mm Cylindric, key    |
| L    | 3019/2             | 4-hole flange Ø100 mm Splined, DIN 5480 |
| D    | SAE ISO 3019/1     | 4-hole flange SAE B Cylindric, key      |
| E    |                    | 4-hole flange SAE B-B Splined, SAE      |

| Code            | Port <sup>4)</sup> | Threads <sup>5)</sup> |
|-----------------|--------------------|-----------------------|
| 1               | BSPP               | metric                |
| 3               | UNF                | UNC                   |
| 8 <sup>6)</sup> | ISO 6149           | metric                |

<sup>4)</sup> Drain, gage and flushing ports

<sup>5)</sup> All mounting and connecting threads

<sup>6)</sup> Mounting interface, code K and L only

| Code | Seals | Shaft seal |
|------|-------|------------|
| N    | NBR   | FKM        |
| V    | FKM   | FKM        |
| W    | NBR   | PTFE       |

| Code | Coupling for through drive            | as single part <sup>7)</sup> |
|------|---------------------------------------|------------------------------|
| 1    | Single pump, no coupling              |                              |
| H    | with coupling 25 x 1.5 x 15, DIN 5480 | MK-PVBG1K01                  |
| Y    | with coupling SAE A 9T-16/32 DP       | MK-PVBG1K11                  |
| A    | with coupling SAE - 11T-16/32 DP      | MK-PVBG1K12                  |
| B    | with coupling SAE B 13T-16/32 DP      | MK-PVBG1K13                  |
| C    | with coupling SAE B-B 15T-16/32 DP    | MK-PVBG1K14                  |

| Code | Through drive option                   |
|------|--|
|      | No adaptor for 2nd pump                |
| T    | Single pump prepared for through drive |
|      | with adaptor for 2nd pump              |
|      | as single part <sup>7)</sup>           |
| A    | SAE A, Ø 82.55 mm                      |
| B    | SAE B, Ø 101.6 mm (4bolt only)         |
| H    | metric, Ø 80 mm                        |
| J    | metric, Ø 100 mm                       |

See dimensions for details

<sup>7)</sup> to be ordered separately as single part  
see page 63.

Standard pump is not painted. Black painted pump and ATEX (excludes electronic components) certification (Zone 2) is available as special option. For additional informations please contact Parker Hannifin.

| Code              |   |   | Control options   |
|-------------------|---|---|---|
| 0                 | 0 | 1 | No control  |
| 1                 | 0 | 0 | With cover plate, no control function (fixed displacement pump)                     |
| M                 | M |   | Standard pressure control   |
| M                 | R |   | Remote pressure control   |
| M                 | F |   | Load Sensing (flow) control   |
| M                 | T |   | Two spool LS control  |
| Control variation |   |   |   |
|                   | C |   | Standard version, integrated pilot valve <sup>1)</sup>                              |
|                   | 1 |   | NG6 interface top side for pilot valves <sup>1)</sup>                               |
|                   | 2 |   | Remote pressure port int. supply , NG6 interface <sup>2)</sup>                      |
|                   | 3 |   | Remote pressure port ext. supply <sup>2)</sup>                                      |
|                   | W |   | With unloading function, 24VDC solenoid <sup>1)</sup>                               |
|                   | K |   | Prop.-pilot valve type PVACRE...K35 mounted   |
|                   | Z |   | Without integrated pilot valve, NG6 interface, for mounting of accessory code PVAC* |
|                   | B |   | Without integrated pilot valve, without NG6 interface <sup>3)</sup>                 |
|                   | P |   | MT1 with mounted pilot valve PVAC1P <sup>2)</sup>                                   |

1) not for MT &amp; \*Z

2) only for MT &amp; \*Z

3) not for MT &amp; MM

| Horse power / Torque control |   |   |
|------------------------------|---|---|
| Code                         |   |   |
|                              |   | Nominal HP at 1.500 rpm   |
| B                            |   | 3 kW  |
| C                            |   | 4 kW  |
| D                            |   | 5.5 kW  |
| E                            |   | 7.5 kW  |
| G                            |   | 11 kW   |
| H                            |   | 15 kW   |
| K                            |   | 18.5 kW   |
| Function                     |   |   |
|                              | L | Horse power control with pressure control <sup>4)</sup>   |
|                              | C | Horse power control with load sensing (single spool)  |
|                              | Z | Horse power control with two spool LS control   |
| Control variation            |   |   |
|                              | C | Standard version, integrated pilot valve <sup>1)</sup>  |
|                              | 1 | NG 6 interface top side <sup>1)</sup>   |
|                              | W | With unloading function, 24 VDC solenoid  |
|                              | K | Prop.-pilot valve type PVACRE...K35 mounted   |
|                              | Z | Without integrated pilot valve, NG6 interface, for mounting of accessory code PVAC* <sup>4)</sup> |
|                              | B | Without integrated pilot valve, without NG6 interface <sup>1), 4)</sup>                           |
|                              | P | *ZZ with mounted pilot valve PVAC1P <sup>2)</sup>   |

4) control variation Z and B without pressure pilot

| Code   |   |   | Control option  |
|--|---|---|---|
| <b>Electro hydraulic control <sup>5)</sup></b> |   |   |   |
| F  | D | V | Proportional displacement control, no pressure compensation   |
| U  | D |   | Proportional displacement control, with pressure compensation   |
| <b>Control variation</b>                       |   |   |   |
|  | R |   | pilot operated pressure control, open NG6 interface   |
|  | K |   | pilot operated pressure control, proportional pilot valve type PVACRE...K35 mounted   |
|  | M |   | pilot operated pressure control, pressure sensor and proportional pilot valve type PVACRE...K35 mounted for pressure control and/or power control |

5) further info in HY30-3254

**P V** **R 1 K 1 T 1 N**

axial piston  
pump  
variable  
displacement

size  
and  
displacement

rotation

mounting  
interface

through  
drive  
code

seals

control

see next page

| Code | Displacement            | Size |
|------|-------------------------|------|
| 032  | 32 cm <sup>3</sup> /rev | 2    |
| 040  | 40 cm <sup>3</sup> /rev | 2    |
| 046  | 46 cm <sup>3</sup> /rev | 2    |

| Code | Seals | Shaft seal |
|------|-------|------------|
| N    | NBR   | FKM        |
| V    | FKM   | FKM        |
| W    | NBR   | PTFE       |

| Code | Rotation <sup>1)</sup> |
|------|------------------------|
| R    | Clockwise              |
| L    | Counter clockwise      |

1) When looked on shaft

| Code | Variation                                    |
|------|--|
| 1    | Standard                                     |
| 2    | Electronic displacement sensor <sup>2)</sup> |
| 9    | Special adjustment <sup>3)</sup>             |

2) not for horse power control

3) requires Kxxxx number

| Code | Mounting interface | Shaft                                   |
|------|--------------------|---|
| K    | metr. ISO 3019/2   | 4-hole flange Ø125 mm Cylindric, key    |
| L    |                    | 4-hole flange Ø125 mm Splined, DIN 5480 |
| D    | SAE ISO 3019/1     | 4-hole flange SAE C Cylindric, key      |
| E    |                    | 4-hole flange SAE C Splined, SAE        |

| Code            | Port <sup>4)</sup> | Threads <sup>5)</sup> |
|-----------------|--------------------|-----------------------|
| 1               | BSPP               | metric                |
| 3               | UNF                | UNC                   |
| 8 <sup>6)</sup> | ISO 6149           | metric                |

4) Drain, gage and flushing ports

5) All mounting and connecting threads

6) Mounting interface, code K and L only

| Code | Coupling for through drive            | as single part <sup>7)</sup> |
|------|---------------------------------------|------------------------------|
| 1    | Single pump, no coupling              |                              |
| H    | with coupling 25 x 1.5 x 15, DIN 5480 | MK-PV рG2K01                 |
| J    | with coupling 32 x 1.5 x 20, DIN 5480 | MK-PV рG2K02                 |
| Y    | with coupling SAE A 9T-16/32 DP       | MK-PV рG2K11                 |
| A    | with coupling SAE - 11T-16/32 DP      | MK-PV рG2K12                 |
| B    | with coupling SAE B 13T-16/32 DP      | MK-PV рG2K13                 |
| C    | with coupling SAE B-B 15T-16/32 DP    | MK-PV рG2K14                 |
| D    | with coupling SAE C 14T-12/24 DP      | MK-PV рG2K15                 |

| Code | Through drive option                   |
|------|--|
|      | No adaptor for 2nd pump                |
| T    | Single pump prepared for through drive |
|      | with adaptor for 2nd pump              |
|      | as single part <sup>7)</sup>           |
| A    | SAE A, Ø 82.55 mm                      |
| B    | SAE B, Ø 101.6 mm                      |
| C    | SAE C, Ø 127 mm (4bolt only)           |
| H    | metric, Ø 80 mm                        |
| J    | metric, Ø 100 mm                       |
| K    | metric, Ø 125 mm                       |

See dimensions for details

7) to be ordered separately as single part  
 see page 63.

Standard pump is not painted. Black painted pump and ATEX (excludes electronic components) certification (Zone 2) is available as special option. For additional informations please contact Parker Hannifin.

| Code              |   |   | Control options   |
|-------------------|---|---|---|
| 0                 | 0 | 1 | No control  |
| 1                 | 0 | 0 | With cover plate, no control function (fixed displacement pump)                     |
| M                 | M |   | Standard pressure control   |
| M                 | R |   | Remote pressure control   |
| M                 | F |   | Load Sensing (flow) control   |
| M                 | T |   | Two spool LS control  |
| Control variation |   |   |   |
|                   | C |   | Standard version, integrated pilot valve <sup>1)</sup>                              |
|                   | 1 |   | NG6 interface top side for pilot valves <sup>1)</sup>                               |
|                   | 2 |   | Remote pressure port int. supply , NG6 interface <sup>2)</sup>                      |
|                   | 3 |   | Remote pressure port ext. supply <sup>2)</sup>                                      |
|                   | W |   | With unloading function, 24VDC solenoid <sup>1)</sup>                               |
|                   | K |   | Prop.-pilot valve type PVACRE...K35 mounted   |
|                   | Z |   | Without integrated pilot valve, NG6 interface, for mounting of accessory code PVAC* |
|                   | B |   | Without integrated pilot valve, without NG6 interface <sup>3)</sup>                 |
|                   | P |   | MT1 with mounted pilot valve PVAC1P <sup>2)</sup>                                   |

1) not for MT & \*Z  
 2) only for MT & \*Z  
 3) not for MT & MM

| Horse power / Torque control |   |   |   |
|------------------------------|---|---|---|
| Code                         |   |   |   |
|                              |   |   | Nominal HP at 1.500 rpm   |
| D                            |   |   | 5.5 kW  |
| E                            |   |   | 7.5 kW  |
| G                            |   |   | 11 kW   |
| H                            |   |   | 15 kW   |
| K                            |   |   | 18.5 kW   |
| M                            |   |   | 22 kW   |
| S                            |   |   | 30 kW   |
| Function                     |   |   |   |
|                              | L |   | Horse power control with pressure control <sup>4)</sup>   |
|                              | C |   | Horse power control with load sensing (single spool)  |
|                              | Z |   | Horse power control with two spool LS control   |
| Control variation            |   |   |   |
|                              |   | C | Standard version, integrated pilot valve <sup>1)</sup>  |
|                              |   | 1 | NG 6 interface top side <sup>1)</sup>   |
|                              |   | W | With unloading function, 24 VDC solenoid  |
|                              |   | K | Prop.-pilot valve type PVACRE...K35 mounted   |
|                              |   | Z | Without integrated pilot valve, NG6 interface, for mounting of accessory code PVAC* <sup>4)</sup> |
|                              |   | B | Without integrated pilot valve, without NG6 interface <sup>1), 4)</sup>                           |
|                              |   | P | *ZZ with mounted pilot valve PVAC1P <sup>2)</sup>   |

4) control variation Z and B without pressure pilot

| Code   |   |   | Control option  |
|--|---|---|---|
| <b>Electro hydraulic control <sup>5)</sup></b> |   |   |   |
| F  | D | V | Proportional displacement control, no pressure compensation   |
| U  | D |   | Proportional displacement control, with pressure compensation   |
| Control variation                              |   |   |   |
|  | R |   | pilot operated pressure control, open NG6 interface   |
|  | K |   | pilot operated pressure control, proportional pilot valve type PVACRE...K35 mounted   |
|  | M |   | pilot operated pressure control, pressure sensor and proportional pilot valve type PVACRE...K35 mounted for pressure control and/or power control |

5) further info in HY30-3254

| P                                       | V  |                             |                   | R        | 1         | K                  | 1            | T                  | 1             | N     |  |             |  |               |
|---|--|-----------------------------|-------------------|----------|-----------|--------------------|--------------|--------------------|---------------|-------|--|-------------|--|---------------|
| axial piston pump variable displacement |  | size and displacement       |                   | rotation |           | mounting interface |              | through drive code |               | seals |  | compensator |  | see next page |
|   |  |                             |                   |          | variation |                    | threads code |                    | coupling code |       |  |             |  |               |
|   |  |                             |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| <b>Code</b>                             | <b>Displacement</b>                          | <b>Size</b>                 |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| 063                                     | 63 cm <sup>3</sup> /rev                      | 3                           |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| 080                                     | 80 cm <sup>3</sup> /rev                      | 3                           |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| 092                                     | 92 cm <sup>3</sup> /rev                      | 3                           |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| <b>Code</b>                             | <b>Rotation <sup>1)</sup></b>                |                             |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| R                                       | Clockwise                                    |                             |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| L                                       | Counter clockwise                            |                             |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| <b>Code</b>                             | <b>Variation</b>                             |                             |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| 1                                       | Standard                                     |                             |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| 2                                       | Electronic displacement sensor <sup>2)</sup> |                             |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| 9                                       | Special adjustment <sup>3)</sup>             |                             |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| 2)                                      | not for horse power control                  |                             |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| 3)                                      | requires Kxxxx number                        |                             |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| <b>Code</b>                             | <b>Mounting interface</b>                    | <b>Shaft</b>                |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| K                                       | metr. ISO 3019/2                             | 4-hole flange Ø160 mm       | Cylindric, key    |          |           |                    |              |                    |               |       |  |             |  |               |
| L                                       |  | 4-hole flange Ø160 mm       | Splined, DIN 5480 |          |           |                    |              |                    |               |       |  |             |  |               |
| D                                       | SAE ISO 3019/1                               | 4-hole flange SAE D         | Cylindric, key    |          |           |                    |              |                    |               |       |  |             |  |               |
| E                                       |  | 4-hole flange SAE D         | Splined, SAE      |          |           |                    |              |                    |               |       |  |             |  |               |
| <b>Code</b>                             | <b>Port<sup>4)</sup></b>                     | <b>Threads<sup>5)</sup></b> |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| 1                                       | BSPP   | metric                      |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| 3                                       | UNF  | UNC                         |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| 4 <sup>6)</sup>                         | BSPP   | metr. M14                   |                   |          |           |                    |              |                    |               |       |  |             |  |               |
| 8 <sup>7)</sup>                         | ISO 6149                                     | metric                      |                   |          |           |                    |              |                    |               |       |  |             |  |               |

4) Drain, gage and flushing ports

5) All mounting and connecting threads

6) For PV063-PV092 only: pressure port 1 1/4" with 4 x M14 instead of 4 x M12

7) for mounting interface K and L only

Standard pump is not painted. Black painted pump and ATEX (excludes electronic components) certification (Zone 2) is available as special option. For additional informations please contact Parker Hannifin.

| Code | Seals | Shaft seal |
|------|-------|------------|
| N    | NBR   | FKM        |
| V    | FKM   | FKM        |
| W    | NBR   | PTFE       |

| Code | Coupling for through drive            | as single part <sup>8)</sup> |
|------|---------------------------------------|------------------------------|
| 1    | Single pump, no coupling              |                              |
| H    | with coupling 25 x 1.5 x 15, DIN 5480 | MK-PV рG3K01                 |
| J    | with coupling 32 x 1.5 x 20, DIN 5480 | MK-PV рG3K02                 |
| K    | with coupling 40 x 1.5 x 25, DIN 5480 | MK-PV рG3K03                 |
| Y    | with coupling SAE A 9T-16/32 DP       | MK-PV рG3K11                 |
| A    | with coupling SAE - 11T-16/32 DP      | MK-PV рG3K12                 |
| B    | with coupling SAE B 13T-16/32 DP      | MK-PV рG3K13                 |
| C    | with coupling SAE B-B 15T-16/32 DP    | MK-PV рG3K14                 |
| D    | with coupling SAE C 14T-12/24 DP      | MK-PV рG3K15                 |
| E    | with coupling SAE C-C 17T-12/24 DP    | MK-PV рG3K16                 |
| F    | with coupling SAE D, E 13T-8/16 DP    | MK-PV рG3K17                 |

| Code | Through drive option                   |
|------|--|
|      | No adaptor for 2nd pump                |
| T    | Single pump prepared for through drive |
|      | with adaptor for 2nd pump              |
|      | as single part <sup>8)</sup>           |
| A    | SAE A, Ø 82.55 mm                      |
| B    | SAE B, Ø 101.6 mm                      |
| C    | SAE C, Ø 127 mm                        |
| D    | SAE D, Ø 152.4 mm                      |
| H    | metric, Ø 80 mm                        |
| J    | metric, Ø 100 mm                       |
| K    | metric, Ø 125 mm                       |
| L    | metric, Ø 160 mm                       |

See dimensions for details

8) to be ordered separately as single part  
see page 63

| Code              |   |   | Control options   |
|-------------------|---|---|---|
| 0                 | 0 | 1 | No control  |
| 1                 | 0 | 0 | With cover plate, no control function (fixed displacement pump)                     |
| M                 | M |   | Standard pressure control   |
| M                 | R |   | Remote pressure control   |
| M                 | F |   | Load Sensing (flow) control   |
| M                 | T |   | Two spool LS control  |
| Control variation |   |   |   |
|                   | C |   | Standard version, integrated pilot valve <sup>1)</sup>                              |
|                   | 1 |   | NG6 interface top side for pilot valves <sup>1)</sup>                               |
|                   | 2 |   | Remote pressure port int. supply , NG6 interface <sup>2)</sup>                      |
|                   | 3 |   | Remote pressure port ext. supply <sup>2)</sup>                                      |
|                   | W |   | With unloading function, 24VDC solenoid <sup>1)</sup>                               |
|                   | K |   | Prop.-pilot valve type PVACRE...K35 mounted   |
|                   | Z |   | Without integrated pilot valve, NG6 interface, for mounting of accessory code PVAC* |
|                   | B |   | Without integrated pilot valve, without NG6 interface <sup>3)</sup>                 |
|                   | P |   | MT1 with mounted pilot valve PVAC1P <sup>2)</sup>                                   |

1) not for MT &amp; \*Z

2) only for MT &amp; \*Z

3) not for MT &amp; MM

| Horse power / Torque control |   |                            |   |
|------------------------------|---|----------------------------|---|
| Code                         |   |                            |   |
|                              |   | Nominal HP<br>at 1.500 rpm | Nominal<br>torque   |
| G                            |   | 11 kW                      | 71 Nm   |
| H                            |   | 15 kW                      | 97 Nm   |
| K                            |   | 18.5 kW                    | 120 Nm  |
| M                            |   | 22 kW                      | 142 Nm  |
| S                            |   | 30 kW                      | 195 Nm  |
| T                            |   | 37 kW                      | 240 Nm  |
| U                            |   | 45 kW                      | 290 Nm  |
| W                            |   | 55 kW                      | 355 Nm  |
| Function                     |   |                            |   |
|                              | L |                            | Horse power control with pressure control <sup>4)</sup>   |
|                              | C |                            | Horse power control with load sensing (single spool)  |
|                              | Z |                            | Horse power control with two spool LS control   |
| Control variation            |   |                            |   |
|                              | C |                            | Standard version, integrated pilot valve <sup>1)</sup>  |
|                              | 1 |                            | NG 6 interface top side <sup>1)</sup>   |
|                              | W |                            | With unloading function, 24 VDC solenoid  |
|                              | K |                            | Prop.-pilot valve type PVACRE...K35 mounted   |
|                              | Z |                            | Without integrated pilot valve, NG6 interface, for mounting of accessory code PVAC* <sup>4)</sup> |
|                              | B |                            | Without integrated pilot valve, without NG6 interface <sup>1), 4)</sup>                           |
|                              | P |                            | *ZZ with mounted pilot valve PVAC1P <sup>2)</sup>   |

4) control variation Z and B  
without pressure pilot

| Code                                    |   | Control option  |
|---|---|---|
| Electro hydraulic control <sup>5)</sup> |   |   |
| F                                       | D | V   |
| U                                       | D |   |
| Control variation                       |   |   |
|   | R | pilot operated pressure control, open NG6 interface   |
|   | K | pilot operated pressure control, proportional pilot valve type PVACRE...K35 mounted   |
|   | M | pilot operated pressure control, pressure sensor and proportional pilot valve type PVACRE...K35 mounted for pressure control and/or power control |

5) further info in HY30-3254

| P                                       | V  |                             |  | R        | 1         | K                  | 1            | T                  | 1             | N     |  |  |  | control       |
|---|--|-----------------------------|--|----------|-----------|--------------------|--------------|--------------------|---------------|-------|--|--|--|---------------|
| axial piston pump variable displacement |  |                             |  | rotation |           | mounting interface |              | through drive code |               | seals |  |  |  | see next page |
|   | size and displacement                        |                             |  |          | variation |                    | threads code |                    | coupling code |       |  |  |  |               |
| <b>Code</b>                             | <b>Displacement</b>                          | <b>Size</b>                 |  |          |           |                    |              |                    |               |       |  |  |  |               |
| 140                                     | 140 cm <sup>3</sup> /rev                     | 4                           |  |          |           |                    |              |                    |               |       |  |  |  |               |
| 180                                     | 180 cm <sup>3</sup> /rev                     | 4                           |  |          |           |                    |              |                    |               |       |  |  |  |               |
| <b>Code</b>                             | <b>Rotation <sup>1)</sup></b>                |                             |  |          |           |                    |              |                    |               |       |  |  |  |               |
| R                                       | Clockwise                                    |                             |  |          |           |                    |              |                    |               |       |  |  |  |               |
| L                                       | Counter clockwise                            |                             |  |          |           |                    |              |                    |               |       |  |  |  |               |
| 1) When looked on shaft                 |  |                             |  |          |           |                    |              |                    |               |       |  |  |  |               |
| <b>Code</b>                             | <b>Variation</b>                             |                             |  |          |           |                    |              |                    |               |       |  |  |  |               |
| 1                                       | Standard                                     |                             |  |          |           |                    |              |                    |               |       |  |  |  |               |
| 2                                       | Electronic displacement sensor <sup>2)</sup> |                             |  |          |           |                    |              |                    |               |       |  |  |  |               |
| 9                                       | Special adjustment <sup>3)</sup>             |                             |  |          |           |                    |              |                    |               |       |  |  |  |               |
| 2) not for horse power control          |  |                             |  |          |           |                    |              |                    |               |       |  |  |  |               |
| 3) requires Kxxxx number                |  |                             |  |          |           |                    |              |                    |               |       |  |  |  |               |
| <b>Code</b>                             | <b>Mounting interface</b>                    |                             |  |          |           |                    |              |                    |               |       |  |  |  |               |
| K                                       | metr. ISO 3019/2                             | 4-hole flange Ø160 mm       |  |          |           |                    |              |                    |               |       |  |  |  |               |
| L                                       |  | 4-hole flange Ø160 mm       |  |          |           |                    |              |                    |               |       |  |  |  |               |
| D                                       |  | 4-hole flange SAE D         |  |          |           |                    |              |                    |               |       |  |  |  |               |
| E                                       | SAE ISO 3019/1                               | 4-hole flange SAE D         |  |          |           |                    |              |                    |               |       |  |  |  |               |
| F                                       |  | 4-hole flange SAE D         |  |          |           |                    |              |                    |               |       |  |  |  |               |
| G                                       |  | 4-hole flange SAE D         |  |          |           |                    |              |                    |               |       |  |  |  |               |
| <b>Code</b>                             | <b>Port<sup>4)</sup></b>                     | <b>Threads<sup>5)</sup></b> |  |          |           |                    |              |                    |               |       |  |  |  |               |
| 1                                       | BSPP   | metric                      |  |          |           |                    |              |                    |               |       |  |  |  |               |
| 3                                       | UNF  | UNC                         |  |          |           |                    |              |                    |               |       |  |  |  |               |
| 4 <sup>6)</sup>                         | BSPP   | metr. M14                   |  |          |           |                    |              |                    |               |       |  |  |  |               |
| 8 <sup>7)</sup>                         | ISO 6149                                     | metric                      |  |          |           |                    |              |                    |               |       |  |  |  |               |

<sup>4)</sup> Drain, gage and flushing ports

<sup>5)</sup> All mounting and connecting threads

<sup>6)</sup> Pressure port 1 1/4" with 4 x M14 instead of 4 x M12

<sup>7)</sup> Mounting interface, code K and L only

Standard pump is not painted. Black painted pump and ATEX (excludes electronic components) certification (Zone 2) is available as special option. For additional informations please contact Parker Hannifin.

See dimensions for details

<sup>8)</sup> to be ordered separately as single part  
see page 63.

| Code                                    |   |   | Control options   |
|---|---|---|---|
| 0                                       | 0 | 1 | No control  |
| 1                                       | 0 | 0 | With cover plate, no control function (fixed displacement pump)   |
| M                                       | M |   | Standard pressure control   |
| M                                       | R |   | Remote pressure control   |
| M                                       | F |   | Load Sensing (flow) control   |
| M                                       | T |   | Two spool LS control  |
| Control variation                       |   |   |   |
|   | C |   | Standard version, integrated pilot valve <sup>1)</sup>  |
|   | 1 |   | NG6 interface top side for pilot valves <sup>1)</sup>   |
|   | 2 |   | Remote pressure port int. supply , NG6 interface <sup>2)</sup>  |
|   | 3 |   | Remote pressure port ext. supply <sup>2)</sup>  |
|   | W |   | With unloading function, 24VDC solenoid <sup>1)</sup>   |
|   | K |   | Prop.-pilot valve type PVACRE...K35 mounted   |
|   | Z |   | Without integrated pilot valve, NG6 interface, for mounting of accessory code PVAC*   |
|   | B |   | Without integrated pilot valve, without NG6 interface <sup>3)</sup>   |
|   | P |   | MT1 with mounted pilot valve PVAC1P <sup>2)</sup>   |
| Horse power / Torque control            |   |   |   |
| Code                                    |   |   |   |
|   |   |   | Nominal HP at 1.500 rpm   |
|   |   |   | Nominal torque  |
| K                                       |   |   | 18.5 kW   |
| M                                       |   |   | 22 kW   |
| S                                       |   |   | 30 kW   |
| T                                       |   |   | 37 kW   |
| U                                       |   |   | 45 kW   |
| W                                       |   |   | 55 kW   |
| Y                                       |   |   | 75 kW   |
| Z                                       |   |   | 90 kW   |
| 2                                       |   |   | 110 kW  |
| 3                                       |   |   | 132 kW  |
| Function                                |   |   |   |
|   | L |   | Horse power control with pressure control <sup>4)</sup>   |
|   | C |   | Horse power control with load sensing (single spool)  |
|   | Z |   | Horse power control with two spool LS control   |
| Control variation                       |   |   |   |
|   | C |   | Standard version, integrated pilot valve <sup>1)</sup>  |
|   | 1 |   | NG 6 interface top side <sup>1)</sup>   |
|   | W |   | With unloading function, 24 VDC solenoid  |
|   | K |   | Prop.-pilot valve type PVACRE...K35 mounted   |
|   | Z |   | Without integrated pilot valve, NG6 interface, for mounting of accessory code PVAC* <sup>4)</sup>   |
|   | B |   | Without integrated pilot valve, without NG6 interface <sup>1), 4)</sup>   |
|   | P |   | *ZZ with mounted pilot valve PVAC1P <sup>2)</sup>   |
| Code                                    |   |   | Control option  |
| Electro hydraulic control <sup>5)</sup> |   |   |   |
| F                                       | D | V | Proportional displacement control, no pressure compensation   |
| U                                       | D |   | Proportional displacement control, with pressure compensation   |
| Control variation                       |   |   |   |
|   | R |   | pilot operated pressure control, open NG6 interface   |
|   | K |   | pilot operated pressure control, proportional pilot valve type PVACRE...K35 mounted   |
|   | M |   | pilot operated pressure control, pressure sensor and proportional pilot valve type PVACRE...K35 mounted for pressure control and/or power control |

1) not for MT &amp; \*Z

2) only for MT &amp; \*Z

3) not for MT &amp; MM

4) control variation Z and B without pressure pilot

5) further info in HY30-3254

|                       |                                   |                             |                   |          |          |                    |          |                    |          |          |  |             |
|-----------------------|-----------------------------------|-----------------------------|-------------------|----------|----------|--------------------|----------|--------------------|----------|----------|--|-------------|
| <b>P</b>              | <b>V</b>                          |                             |                   | <b>R</b> | <b>1</b> | <b>K</b>           | <b>1</b> | <b>T</b>           | <b>1</b> | <b>N</b> |  |             |
| axial piston pump     |                                   |                             |                   | rotation |          | mounting interface |          | through drive code |          | seals    |  | compensator |
| variable displacement |                                   |                             |                   |          |          |                    |          |                    |          |          |  |             |
|                       | size and displacement             |                             |                   |          |          |                    |          |                    |          |          |  |             |
|                       |                                   |                             |                   |          |          |                    |          |                    |          |          |  |             |
| <b>Code</b>           | <b>Displacement</b>               | <b>Size</b>                 |                   |          |          |                    |          |                    |          |          |  |             |
| 270                   | 270 cm <sup>3</sup> /rev          | 5                           |                   |          |          |                    |          |                    |          |          |  |             |
| <b>Code</b>           | <b>Rotation 1)</b>                |                             |                   |          |          |                    |          |                    |          |          |  |             |
| R                     | Clockwise                         |                             |                   |          |          |                    |          |                    |          |          |  |             |
| L                     | Counter clockwise                 |                             |                   |          |          |                    |          |                    |          |          |  |             |
| 1)                    | When looked on shaft              |                             |                   |          |          |                    |          |                    |          |          |  |             |
| <b>Code</b>           | <b>Variation</b>                  |                             |                   |          |          |                    |          |                    |          |          |  |             |
| 1                     | Standard                          |                             |                   |          |          |                    |          |                    |          |          |  |             |
| 2                     | Electronic displacement sensor 2) |                             |                   |          |          |                    |          |                    |          |          |  |             |
| 9                     | Special adjustment 3)             |                             |                   |          |          |                    |          |                    |          |          |  |             |
| 2)                    | not for horse power control       |                             |                   |          |          |                    |          |                    |          |          |  |             |
| 3)                    | requires Kxxxx number             |                             |                   |          |          |                    |          |                    |          |          |  |             |
| <b>Code</b>           | <b>Mounting interface</b>         | <b>Shaft</b>                |                   |          |          |                    |          |                    |          |          |  |             |
| K                     | metr. ISO 3019/2                  | 4-hole flange Ø200 mm       | Cylindric, key    |          |          |                    |          |                    |          |          |  |             |
| L                     |                                   | 4-hole flange Ø200 mm       | Splined, DIN 5480 |          |          |                    |          |                    |          |          |  |             |
| D                     | SAE ISO 3019/1                    | 4-hole flange SAE E         | Cylindric, key    |          |          |                    |          |                    |          |          |  |             |
| E                     |                                   | 4-hole flange SAE E         | Splined, SAE      |          |          |                    |          |                    |          |          |  |             |
| <b>Code</b>           | <b>Port<sup>4)</sup></b>          | <b>Threads<sup>5)</sup></b> |                   |          |          |                    |          |                    |          |          |  |             |
| 1                     | BSPP                              | metric                      |                   |          |          |                    |          |                    |          |          |  |             |
| 3                     | UNF                               | UNC                         |                   |          |          |                    |          |                    |          |          |  |             |
| 8                     | ISO 6149                          | metric                      |                   |          |          |                    |          |                    |          |          |  |             |

4) Drain, gage and flushing ports

5) All mounting and connecting threads

| <b>Code</b> | <b>Seals</b> | <b>Shaft seal</b> |
|-------------|--------------|-------------------|
| N           | NBR          | FKM               |
| V           | FKM          | FKM               |
| W           | NBR          | PTFE              |

| <b>Code</b> | <b>Coupling for through drive</b>     | <b>as single part<sup>6)</sup></b> |
|-------------|---------------------------------------|------------------------------------|
| 1           | Single pump, no coupling              |                                    |
| H           | with coupling 25 x 1.5 x 15, DIN 5480 | MK-PVBG5K01                        |
| J           | with coupling 32 x 1.5 x 20, DIN 5480 | MK-PVBG5K02                        |
| K           | with coupling 40 x 1.5 x 25, DIN 5480 | MK-PVBG5K03                        |
| L           | with coupling 50 x 2 x 24, DIN 5480   | MK-PVBG5K04                        |
| M           | with coupling 60 x 2 x 28, DIN 5480   | MK-PVBG5K05                        |
| Y           | with coupling SAE A 9T-16/32 DP       | MK-PVBG5K11                        |
| A           | with coupling SAE - 11T-16/32 DP      | MK-PVBG5K12                        |
| B           | with coupling SAE B 13T-16/32 DP      | MK-PVBG5K13                        |
| C           | with coupling SAE B-B 15T-16/32 DP    | MK-PVBG5K14                        |
| D           | with coupling SAE C 14T-12/24 DP      | MK-PVBG5K15                        |
| E           | with coupling SAE C-C 17T-12/24 DP    | MK-PVBG5K16                        |
| F           | with coupling SAE D, E 13T-8/16 DP    | MK-PVBG5K17                        |
| G           | with coupling SAE F 15T-8/16 DP       | MK-PVBG5K18                        |

| <b>Code</b> | <b>Through drive option</b>                   |
|-------------|---|
|             | No adaptor for 2nd pump                       |
| T           | <b>Single pump prepared for through drive</b> |
|             | with adaptor for 2nd pump                     |
|             | as single part <sup>6)</sup>                  |
| A           | SAE A, Ø 82.55 mm                             |
| B           | SAE B, Ø 101.6 mm                             |
| C           | SAE C, Ø 127 mm                               |
| D           | SAE D, Ø 152.4 mm                             |
| E           | SAE E, Ø 165.1 mm                             |
| H           | metric, Ø 80 mm                               |
| J           | metric, Ø 100 mm                              |
| K           | metric, Ø 125 mm                              |
| L           | metric, Ø 160 mm                              |
| M           | metric, Ø 200 mm                              |

See dimensions for details

6) to be ordered separately as single part  
 see page 63.

Standard pump is not painted. Black painted pump and ATEX (excludes electronic components) certification (Zone 2) is available as special option. For additional informations please contact Parker Hannifin.

| Code                                    |   |   | Control options   |
|---|---|---|---|
| 0                                       | 0 | 1 | No control  |
| 1                                       | 0 | 0 | With cover plate, no control function (fixed displacement pump)   |
| M                                       | M |   | Standard pressure control   |
| M                                       | R |   | Remote pressure control   |
| M                                       | F |   | Load Sensing (flow) control   |
| M                                       | T |   | Two spool LS control  |
| Control variation                       |   |   |   |
|   | C |   | Standard version, integrated pilot valve <sup>1)</sup>  |
|   | 1 |   | NG6 interface top side for pilot valves <sup>1)</sup>   |
|   | 2 |   | Remote pressure port int. supply , NG6 interface <sup>2)</sup>  |
|   | 3 |   | Remote pressure port ext. supply <sup>2)</sup>  |
|   | W |   | With unloading function, 24VDC solenoid <sup>1)</sup>   |
|   | K |   | Prop.-pilot valve type PVACRE...K35 mounted   |
|   | Z |   | Without integrated pilot valve, NG6 interface, for mounting of accessory code PVAC*   |
|   | B |   | Without integrated pilot valve, without NG6 interface <sup>3)</sup>   |
|   | P |   | MT1 with mounted pilot valve PVAC1P <sup>2)</sup>   |
| Horse power / Torque control            |   |   |   |
| Code                                    |   |   |   |
|   |   |   | Nominal HP at 1.500 rpm   |
| T                                       |   |   | 37 kW   |
| U                                       |   |   | 45 kW   |
| W                                       |   |   | 55 kW   |
| Y                                       |   |   | 75 kW   |
| Z                                       |   |   | 90 kW   |
| 2                                       |   |   | 110 kW  |
| 3                                       |   |   | 132 kW  |
| 4                                       |   |   | 160 kW  |
| 5                                       |   |   | 180 kW  |
| 6                                       |   |   | 200 kW  |
| Function                                |   |   |   |
|   | L |   | Horse power control with pressure control <sup>4)</sup>   |
|   | C |   | Horse power control with load sensing (single spool)  |
|   | Z |   | Horse power control with two spool LS control   |
| Control variation                       |   |   |   |
|   | C |   | Standard version, integrated pilot valve <sup>1)</sup>  |
|   | 1 |   | NG 6 interface top side <sup>1)</sup>   |
|   | W |   | With unloading function, 24 VDC solenoid  |
|   | K |   | Prop.-pilot valve type PVACRE...K35 mounted   |
|   | Z |   | Without integrated pilot valve, NG6 interface, for mounting of accessory code PVAC* <sup>4)</sup>   |
|   | B |   | Without integrated pilot valve, without NG6 interface <sup>1), 4)</sup>   |
|   | P |   | *ZZ with mounted pilot valve PVAC1P <sup>2)</sup>   |
| Code                                    |   |   | Control option  |
| Electro hydraulic control <sup>5)</sup> |   |   |   |
| F                                       | D | V | Proportional displacement control, no pressure compensation   |
| U                                       | D |   | Proportional displacement control, with pressure compensation   |
| Control variation                       |   |   |   |
|   | R |   | pilot operated pressure control, open NG6 interface   |
|   | K |   | pilot operated pressure control, proportional pilot valve type PVACRE...K35 mounted   |
|   | M |   | pilot operated pressure control, pressure sensor and proportional pilot valve type PVACRE...K35 mounted for pressure control and/or power control |

1) not for MT &amp; \*Z

2) only for MT &amp; \*Z

3) not for MT &amp; MM

4) control variation Z and B without pressure pilot

5) further info in HY30-3254

| P                     | V  |                             |                   | R        | 1         | K                  | 1            | T                  | 1             | N     |  |  |  | control       |
|-----------------------|--|-----------------------------|-------------------|----------|-----------|--------------------|--------------|--------------------|---------------|-------|--|--|--|---------------|
| axial piston pump     |  |                             |                   | rotation |           | mounting interface |              | through drive code |               | seals |  |  |  |               |
| variable displacement |  | size and displacement       |                   |          | variation |                    | threads code |                    | coupling code |       |  |  |  |               |
|                       |  |                             |                   |          |           |                    |              |                    |               |       |  |  |  | see next page |
| <b>Code</b>           | <b>Displacement</b>                          | <b>Size</b>                 |                   |          |           |                    |              |                    |               |       |  |  |  |               |
| 360                   | 360 cm <sup>3</sup> /rev                     | 6                           |                   |          |           |                    |              |                    |               |       |  |  |  |               |
| <b>Code</b>           | <b>Rotation <sup>1)</sup></b>                |                             |                   |          |           |                    |              |                    |               |       |  |  |  |               |
| R                     | Clockwise                                    |                             |                   |          |           |                    |              |                    |               |       |  |  |  |               |
| L                     | Counter clockwise                            |                             |                   |          |           |                    |              |                    |               |       |  |  |  |               |
| <b>Code</b>           | <b>Variation</b>                             |                             |                   |          |           |                    |              |                    |               |       |  |  |  |               |
| 1                     | Standard                                     |                             |                   |          |           |                    |              |                    |               |       |  |  |  |               |
| 2                     | Electronic displacement sensor <sup>2)</sup> |                             |                   |          |           |                    |              |                    |               |       |  |  |  |               |
| 9                     | Special adjustment <sup>3)</sup>             |                             |                   |          |           |                    |              |                    |               |       |  |  |  |               |
| <b>Code</b>           | <b>Mounting interface</b>                    | <b>Shaft</b>                |                   |          |           |                    |              |                    |               |       |  |  |  |               |
| K                     | 4-hole flange Ø250 mm                        | Cylindric, key              |                   |          |           |                    |              |                    |               |       |  |  |  |               |
| L                     | metr. ISO 3019/2                             | 4-hole flange Ø250 mm       | Splined, DIN 5480 |          |           |                    |              |                    |               |       |  |  |  |               |
| R                     |  | 4-hole flange Ø224 mm       | Cylindric, key    |          |           |                    |              |                    |               |       |  |  |  |               |
| T                     |  | 4-hole flange Ø224 mm       | Splined, DIN 5480 |          |           |                    |              |                    |               |       |  |  |  |               |
| D                     | SAE ISO 3019/1                               | 4-hole flange SAE E         | Cylindric, key    |          |           |                    |              |                    |               |       |  |  |  |               |
| E                     |  | 4-hole flange SAE E         | Splined, DIN 5480 |          |           |                    |              |                    |               |       |  |  |  |               |
| <b>Code</b>           | <b>Port<sup>4)</sup></b>                     | <b>Threads<sup>5)</sup></b> |                   |          |           |                    |              |                    |               |       |  |  |  |               |
| 1                     | BSPP   | metric                      |                   |          |           |                    |              |                    |               |       |  |  |  |               |
| 3                     | UNF  | UNC                         |                   |          |           |                    |              |                    |               |       |  |  |  |               |

<sup>4)</sup> Drain, gage and flushing ports

<sup>5)</sup> All mounting and connecting threads

| <b>Code</b> | <b>Coupling for through drive</b>     | <b>as single part <sup>6)</sup></b> |
|-------------|---------------------------------------|-------------------------------------|
| 1           | Single pump, no coupling              |                                     |
| H           | with coupling 25 x 1.5 x 15, DIN 5480 | MK-PV рG5K01                        |
| J           | with coupling 32 x 1.5 x 20, DIN 5480 | MK-PV рG5K02                        |
| K           | with coupling 40 x 1.5 x 25, DIN 5480 | MK-PV рG5K03                        |
| L           | with coupling 50 x 2 x 24, DIN 5480   | MK-PV рG5K04                        |
| M           | with coupling 60 x 2 x 28, DIN 5480   | MK-PV рG5K05                        |
| P           | with coupling 70 x 3 x 22, DIN 5480   | MK-PV рG5K06                        |
| Y           | with coupling SAE A 9T-16/32 DP       | MK-PV рG5K11                        |
| A           | with coupling SAE - 11T-16/32 DP      | MK-PV рG5K12                        |
| B           | with coupling SAE B 13T-16/32 DP      | MK-PV рG5K13                        |
| C           | with coupling SAE B-B 15T-16/32 DP    | MK-PV рG5K14                        |
| D           | with coupling SAE C 14T-12/24 DP      | MK-PV рG5K15                        |
| E           | with coupling SAE C-C 17T-12/24 DP    | MK-PV рG5K16                        |
| F           | with coupling SAE D, E 13T-8/16 DP    | MK-PV рG5K17                        |
| G           | with coupling SAE F 15T-8/16 DP       | MK-PV рG5K18                        |

| <b>Code</b> | <b>Through drive option</b>                   |                                     |
|-------------|---|-------------------------------------|
|             | No adaptor for 2nd pump                       |                                     |
| T           | <b>Single pump prepared for through drive</b> |                                     |
|             | with adaptor for 2nd pump                     | <b>as single part <sup>6)</sup></b> |
| A           | SAE A, Ø 82.55 mm                             | MK-PV рG5Axx                        |
| B           | SAE B, Ø 101.6 mm                             | MK-PV рG5Bxx                        |
| C           | SAE C, Ø 127 mm                               | MK-PV рG5Cxx                        |
| D           | SAE D, Ø 152.4 mm                             | MK-PV рG5Dxx                        |
| E           | SAE E, Ø 165.1 mm                             | MK-PV рG5Exx                        |
| H           | metric, Ø 80 mm                               | MK-PV рG5Hxx                        |
| J           | metric, Ø 100 mm                              | MK-PV рG5Jxx                        |
| K           | metric, Ø 125 mm                              | MK-PV рG5Kxx                        |
| L           | metric, Ø 160 mm                              | MK-PV рG5Lxx                        |
| M           | metric, Ø 200 mm                              | MK-PV рG5Mxx                        |

See dimensions for details

<sup>6)</sup> to be ordered separately as single part  
see page 63.

Standard pump is not painted. Black painted pump and ATEX (excludes electronic components) certification (Zone 2) is available as special option. For additional informations please contact Parker Hannifin.

| Code              |   |   | Control options   |
|-------------------|---|---|---|
| 0                 | 0 | 1 | No control  |
| 1                 | 0 | 0 | With cover plate, no control function (fixed displacement pump)                     |
| M                 | M |   | Standard pressure control   |
| M                 | R |   | Remote pressure control   |
| M                 | F |   | Load Sensing (flow) control   |
| M                 | T |   | Two spool LS control  |
| Control variation |   |   |   |
|                   | C |   | Standard version, integrated pilot valve <sup>1)</sup>                              |
|                   | 1 |   | NG6 interface top side for pilot valves <sup>1)</sup>                               |
|                   | 2 |   | Remote pressure port int. supply , NG6 interface <sup>2)</sup>                      |
|                   | 3 |   | Remote pressure port ext. supply <sup>2)</sup>                                      |
|                   | W |   | With unloading function, 24VDC solenoid <sup>1)</sup>                               |
|                   | K |   | Prop.-pilot valve type PVACRE...K35 mounted   |
|                   | Z |   | Without integrated pilot valve, NG6 interface, for mounting of accessory code PVAC* |
|                   | B |   | Without integrated pilot valve, without NG6 interface <sup>3)</sup>                 |
|                   | P |   | MT1 with mounted pilot valve PVAC1P <sup>2)</sup>                                   |

1) not for MT &amp; \*Z

2) only for MT &amp; \*Z

3) not for MT &amp; MM

| Horse power / Torque control |   |   |
|------------------------------|---|---|
| Code                         |   |   |
|                              |   | Nominal HP at 1.500 rpm   |
| U                            |   | 45 kW   |
| W                            |   | 55 kW   |
| Y                            |   | 75 kW   |
| Z                            |   | 90 kW   |
| 2                            |   | 110 kW  |
| 3                            |   | 132 kW  |
| 4                            |   | 160 kW  |
| 5                            |   | 180 kW  |
| 6                            |   | 200 kW  |
| Function                     |   |   |
|                              | L | Horse power control with pressure control <sup>4)</sup>   |
|                              | C | Horse power control with load sensing (single spool)  |
|                              | Z | Horse power control with two spool LS control   |
| Control variation            |   |   |
|                              | C | Standard version, integrated pilot valve <sup>1)</sup>  |
|                              | 1 | NG 6 interface top side <sup>1)</sup>   |
|                              | W | With unloading function, 24 VDC solenoid  |
|                              | K | Prop.-pilot valve type PVACRE...K35 mounted   |
|                              | Z | Without integrated pilot valve, NG6 interface, for mounting of accessory code PVAC* <sup>4)</sup> |
|                              | B | Without integrated pilot valve, without NG6 interface <sup>1), 4)</sup>                           |
|                              | P | *ZZ with mounted pilot valve PVAC1P <sup>2)</sup>   |

4) control variation Z and B without pressure pilot

| Code   |   |   | Control option  |
|--|---|---|---|
| <b>Electro hydraulic control <sup>5)</sup></b> |   |   |   |
| F  | D | V | Proportional displacement control, no pressure compensation   |
| U  | D |   | Proportional displacement control, with pressure compensation   |
| <b>Control variation</b>                       |   |   |   |
|  | R |   | pilot operated pressure control, open NG6 interface   |
|  | K |   | pilot operated pressure control, proportional pilot valve type PVACRE...K35 mounted   |
|  | M |   | pilot operated pressure control, pressure sensor and proportional pilot valve type PVACRE...K35 mounted for pressure control and/or power control |


5) further info in HY30-3254

## Standard Pressure Control

### Control option MMC


The standard pressure control adjusts the pump displacement according to the actual need of flow in the system in order to keep the pressure constant.

### Control schematics

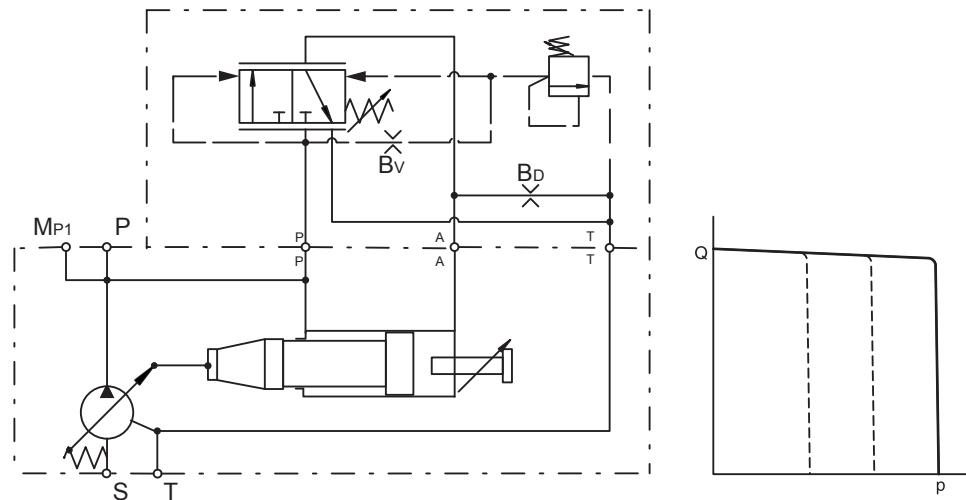

Response times of the pump are collected from a circuit as below by measuring the pumps swash angle movement at different pressures.

### Dynamic characteristic of flow control \*

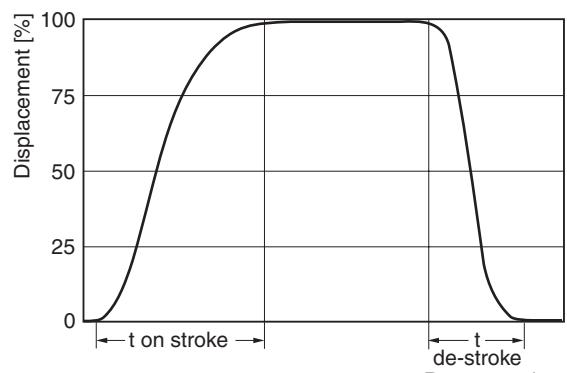

\* Curve shown exaggerated

|       | Time on-stroke [ms] |                 | Time de-stroke [ms] |                     |
|-------|---------------------|-----------------|---------------------|---------------------|
|       | against 50 bar      | against 350 bar | zero stroke 50 bar  | zero stroke 350 bar |
| PV360 | 520                 | 180             | 120                 | 82                  |


|  |                  |
|--|------------------|
| Pressure adjustment range              | 15 to 420 bar    |
| Factory setting pressure               | 50 bar           |
| Differential pressure adjustment range | 10 to 40 bar     |
| Factory setting differential pressure  | 15 bar           |
| Control oil consumption                | Max 8.0 l/min    |
| Typical pilot flow                     | approx 1.5 l/min |

## Standard Pressure Control with NG6 Interface

## Control option MM1

With code MM1 the standard pressure control has a valve interface size NG 6 DIN 24340 (CETOP 03 acc. RP35H, NFPA D03) on the top side.

This interface allows the mounting of accessories like multiple pressure selectors without the need of external piping and valve mounting.

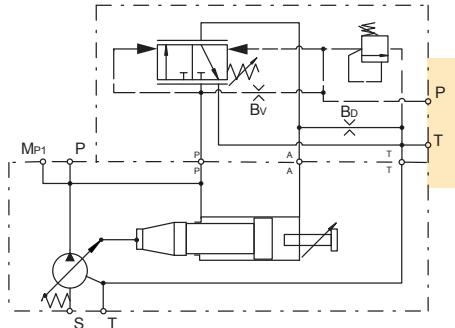


## Standard Pressure Control with Electrical Unloading

## Control option MMW

With code MMW a solenoid operated directional control valve (D1VW002KNJW) for electrical unloading is mounted on the control top side.

When the solenoid is de-energised, the pump compensates at a stand-by pressure of typically 15 bar. When the solenoid is energised, the pump compensates at the pressure adjusted on the integrated pilot valve.

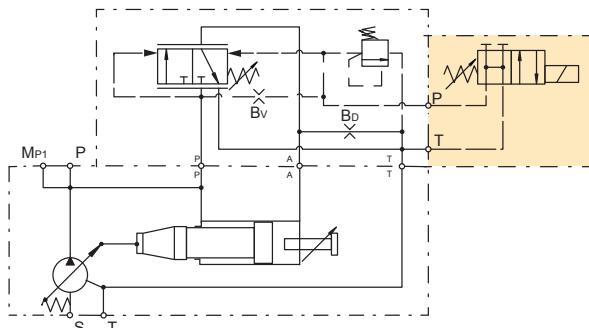


## Standard Pressure Control with Proportional Pilot Valve

## Control option MMK

With code MMK a proportional pilot valve of type PVACRE...K35 (see page 43) is mounted on the top side interface.

This allows a variation of the pump compensating pressure between 20 and 350 bar by an electrical signal.

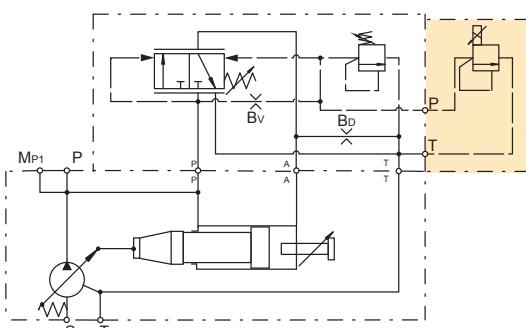


## Standard Pressure Control without Integrated Pressure Pilot Valve

## Control option MMZ

Control MMZ has no integrated pilot valve but a valve interface NG6 DIN 24340 on the top.

This version is recommended for valve accessories.

For operation at >350 bar please select respective valve accessories (see page 40)

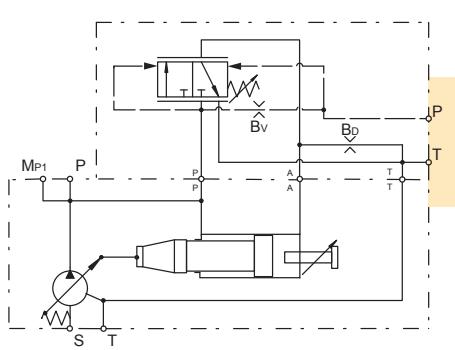


## Remote Pressure Control


### Control option MRC

The remote pressure control adjusts the pump displacement according to the actual need of flow in the system in order to keep the pressure constant at a level given by a remotely installed pilot valve.


### Control schematics

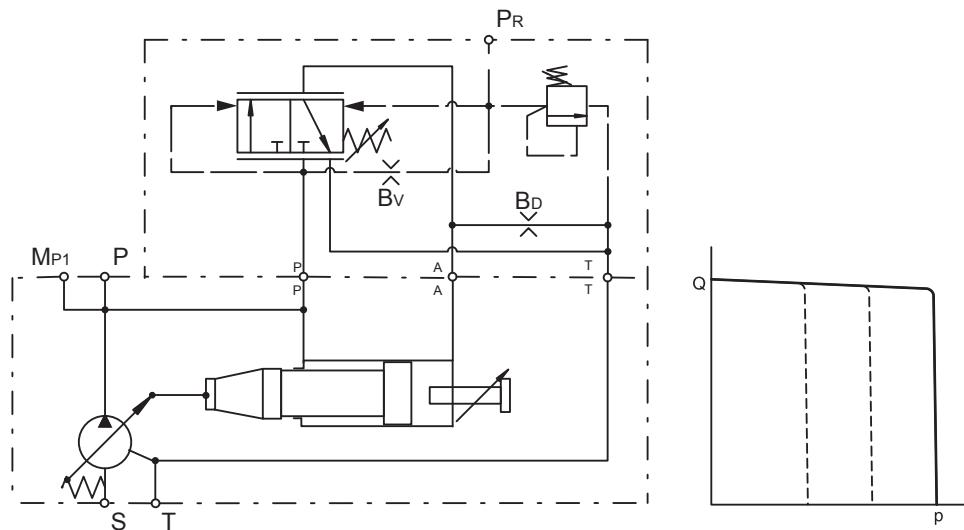

Response times of the pump are collected from a circuit as below by measuring the pumps swash angle movement at different pressures.

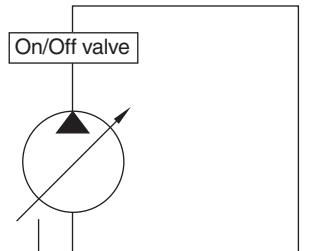

### Dynamic characteristic of flow control \*

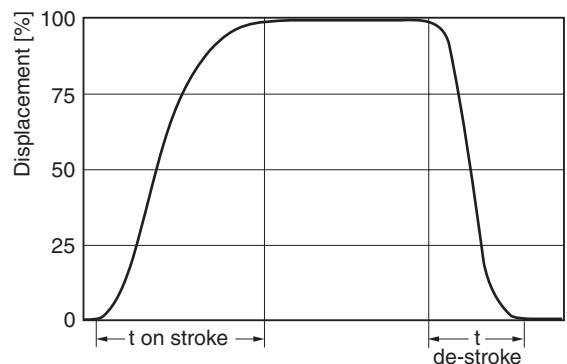

\* Curve shown exaggerated

|       | Time on-stroke [ms] |                 | Time de-stroke [ms] |                     |
|-------|---------------------|-----------------|---------------------|---------------------|
|       | against 50 bar      | against 350 bar | zero stroke 50 bar  | zero stroke 350 bar |
| PV360 | 520                 | 180             | 120                 | 82                  |


|  |                  |
|--|------------------|
| Pressure adjustment range              | 15 to 420 bar    |
| Factory setting pressure               | 50 bar           |
| Differential pressure adjustment range | 10 to 40 bar     |
| Factory setting differential pressure  | 15 bar           |
| Control oil consumption                | Max 8.0 l/min    |
| Typical pilot flow                     | approx 1.5 l/min |

## Remote Pressure Control with NG6 Interface

### Control option MR1

With code MR1 the remote pressure control has a valve interface size NG 6 DIN 24340 (CETOP 03 acc. RP35H, NFPA D03) on the top side.

This interface allows the mounting of accessories like multiple pressure selectors without the need of external piping and valve mounting.

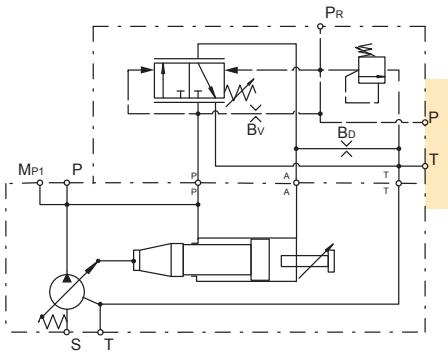


## Remote Pressure Control with Electrical Unloading

### Control option MRW

With code MRW a solenoid operated directional control valve (D1VW002KNJW) for electrical unloading is mounted on the control top side.

When the solenoid is de-energised, the pump compensates at a stand-by pressure of typically 15 bar. When the solenoid is energised, the pump compensates at the pressure adjusted on the integrated pilot valve.

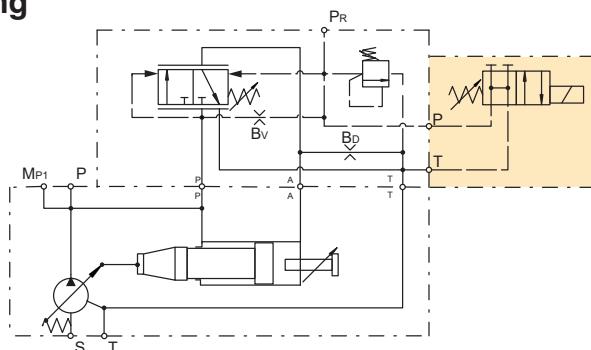


## Remote Pressure Control with Proportional Pilot Valve

### Control option MRK

With code MRK a proportional pilot valve of type PVACRE...K35 (see page 43) is mounted on the top side interface.


This allows a variation of the pump compensating pressure between 20 and 350 bar by an electrical signal.

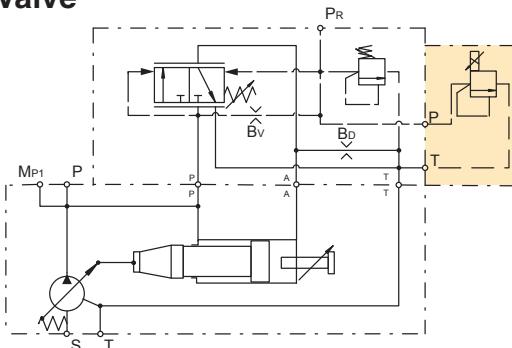

## Remote Pressure Control without Integrated Pressure Pilot Valve

### Control option MRZ


Control MRZ has no integrated pilot valve but a NG6 DIN 24340 interface topside.

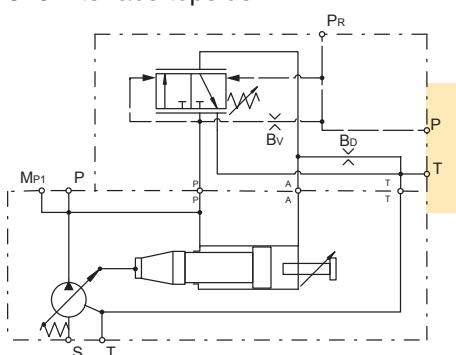

This version is recommended for valve accessories.

### Control option MRB

Control MRB has no integrated pilot valve.

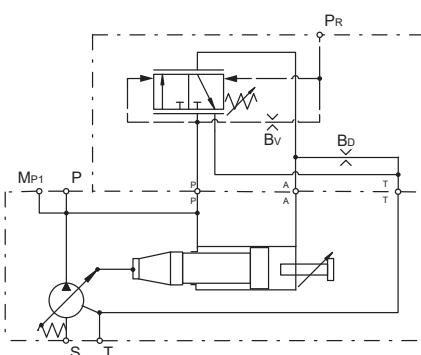


## Load Sensing Control


### Control option MFC

The pilot pressure of the load sensing control is taken from a load sensing port in the hydraulic system. It is used to match pump flow to system demands. Integrated pilot valve allows pmax adjustment.

### Control schematics

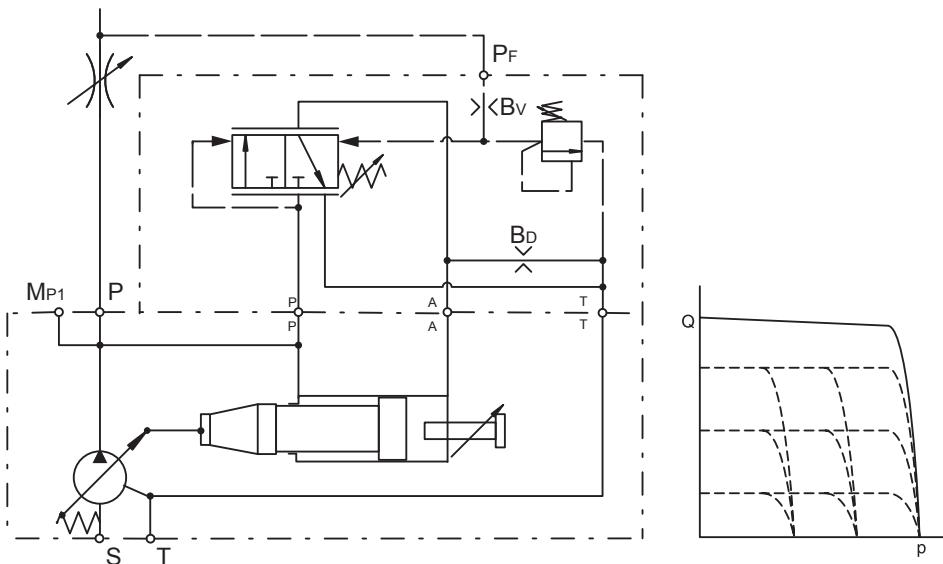


Response times of the pump are collected from a circuit as below by measuring the pumps swash angle movement at different pressures.

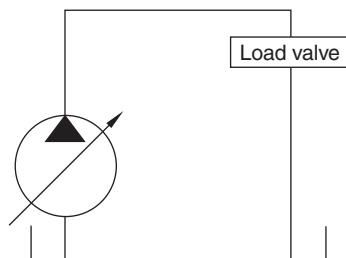

|       | Time on-stroke [ms] |                     | Time de-stroke [ms] |                     |
|-------|---------------------|---------------------|---------------------|---------------------|
|       | stand-by to 50 bar  | stand-by to 350 bar | 50 bar to stand-by  | 350 bar to stand-by |
| PV360 | 500                 | 690                 | 830                 | 50                  |

|  |                  |
|--|------------------|
| Pressure adjustment range              | 15 to 420 bar    |
| Factory setting pressure               | 50 bar           |
| Differential pressure adjustment range | 10 to 40 bar     |
| Factory setting differential pressure  | 10 bar           |
| Control oil consumption                | Max 8.0 l/min    |
| Typical pilot flow                     | approx 1.5 l/min |

### Dynamic characteristic of flow control \*

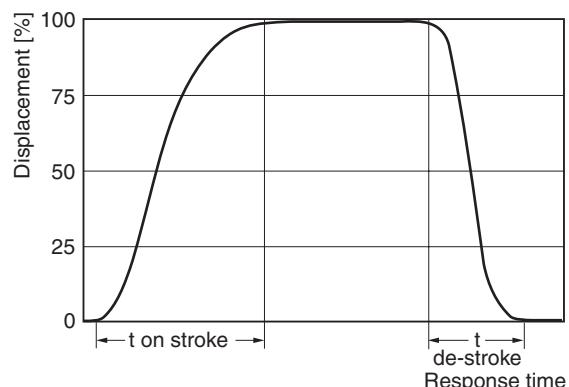


\* Curve shown exaggerated

## Load Sensing Control with NG6 Interface

### Control option MF1

With code MF1 the remote pressure control has a valve interface size NG 6 DIN 24340 (CETOP 03 acc. RP35H, NFPA D03) on the top side.

This interface allows the mounting of accessories like multiple pressure selectors without the need of external piping and valve mounting.

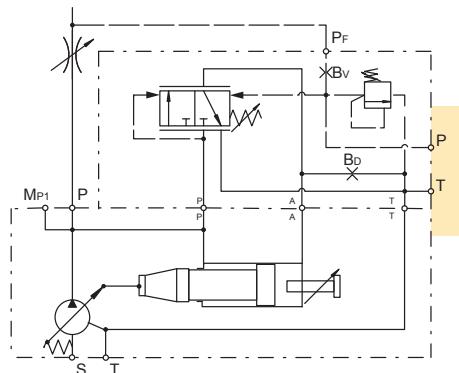


## Load Sensing Control with Electrical Unloading

### Control option MFW

With code MFW a solenoid operated directional control valve (D1VW002KNJW) for electrical unloading is mounted on the control top side.

When the solenoid is de-energised, the pump compensates at a stand-by pressure of typically 15 bar. When the solenoid is energised, the pump compensates at the pressure adjusted on the integrated pilot valve.

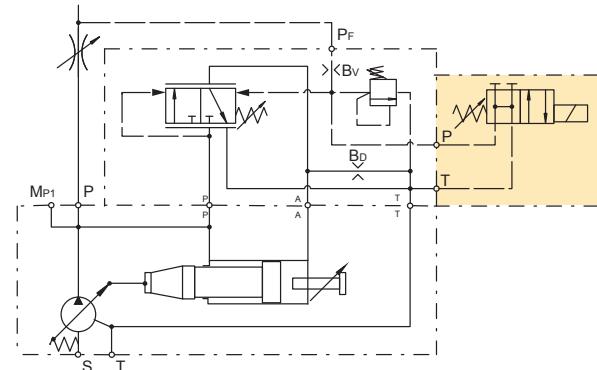


## Load Sensing Control with Proportional Pilot Valve

### Control option MFK

With code MFK a proportional pilot valve of type PVACRE...K35 (see page 43) is mounted on the top side interface.


This allows a variation of the pump compensating pressure between 20 and 350 bar by an electrical signal.

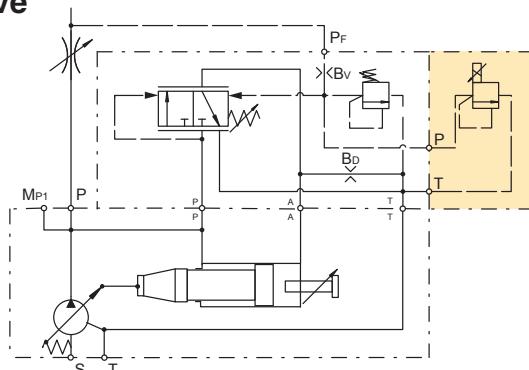

## Load Sensing Control without Integrated Pressure Pilot Valve

### Control option MFZ


Control MFZ has no integrated pilot valve but a NG6 DIN 24340 interface topside.

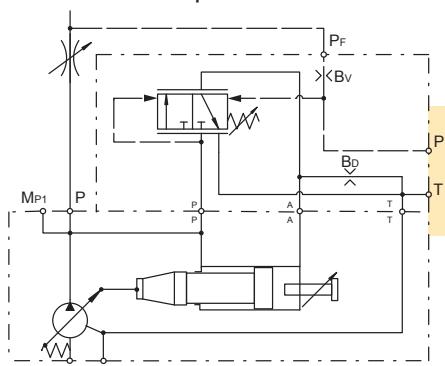

This version is recommended for valve accessories.

### Control option MFB

Control MFB has no integrated pilot valve.

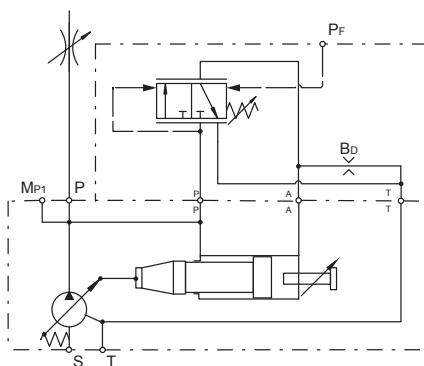


## 2 Spool Load Sensing Control


### Control option MTP

The pilot pressure of the load sensing control is taken from a load sensing port in the hydraulic system. It is used to match pump flow to system demands. With the 2 spool control the interaction of the two control functions is avoided by using two separate control valves for flow and pressure compensation.

### Control schematics

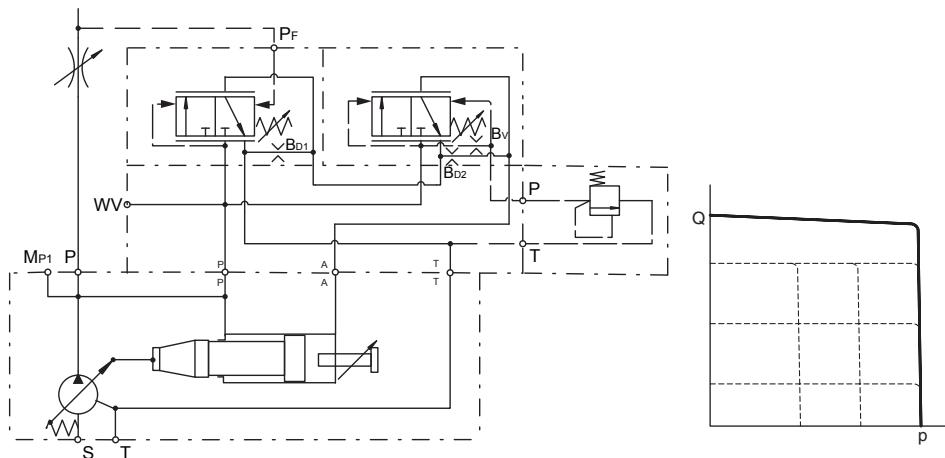


Response times of the pump are collected from a circuit as below by measuring the pumps swash angle movement at different pressures.

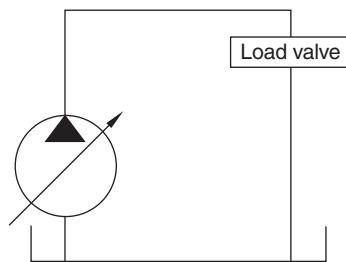

|       | Time on-stroke [ms] |                     | Time de-stroke [ms] |                     |
|-------|---------------------|---------------------|---------------------|---------------------|
|       | stand-by to 50 bar  | stand-by to 350 bar | 50 bar to stand-by  | 350 bar to stand-by |
| PV360 | 920                 | 670                 | 1000                | 170                 |

|   |                  |
|---|------------------|
| Pressure adjustment range                               | 15 to 420 bar    |
| Factory setting pressure                                | 50 bar           |
| Differential pressure adjustment range                  | 10 to 40 bar     |
| Factory setting differential pressure load sensing      | 10 bar           |
| Factory setting differential pressure, pressure control | 15 bar           |
| Control oil consumption                                 | Max 8.0 l/min    |
| Typical pilot flow                                      | approx 1.5 l/min |

### Dynamic characteristic of flow control \*

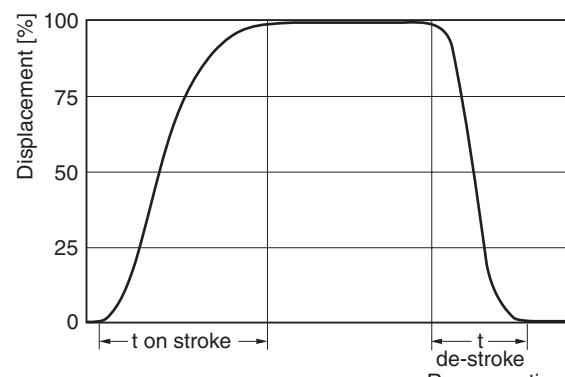


\* Curve shown exaggerated

## 2 Spool Load Sensing Control with NG6 Interface without Integrated Pressure Pilot Valve **Control option MT1 & MTZ**

Control MT1 & MTZ has no integrated pressure pilot valve but NG 6 DIN 24340 (CETOP 03 acc. RP35H, NFPA D03) on the top side.


This interface allows the mounting of accessories like multiple pressure selectors without the need of external piping and valve mounting.

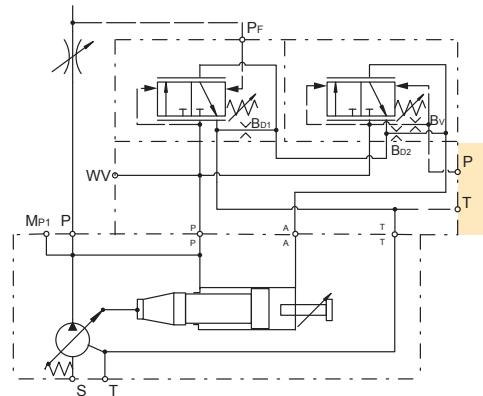

## 2 Spool Load Sensing Control with Proportional Pilot Valve **Control option MTK**


With code MTK a proportional pilot valve of type PVACRE...K35 (see page 43) is mounted on the top side interface.

This allows a variation of the pump compensating pressure between 20 and 350 bar by an electrical signal.

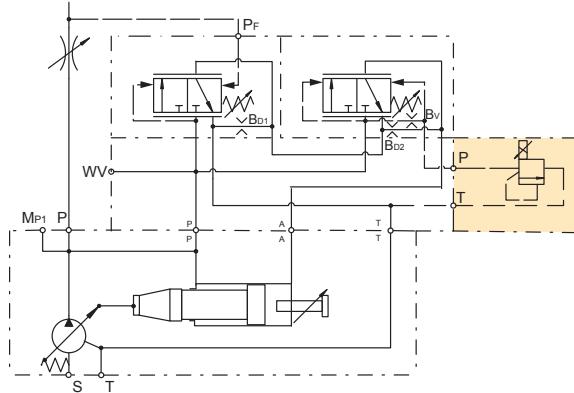


## 2 Spool Load Sensing Control without Integrated Pressure Pilot Valve **Control option MT2**

Control MT2 has a valve interface NG6 DIN 24340 on the top side and remote pressure port internal supply.

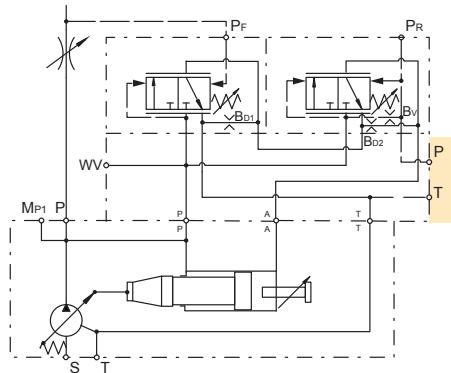

## 2 Spool Load Sensing Control without Integrated Pressure Pilot Valve **Control option MT3**

Control MT3 with pressure remote port external supply.  
 Incl. closed NG6-pad.

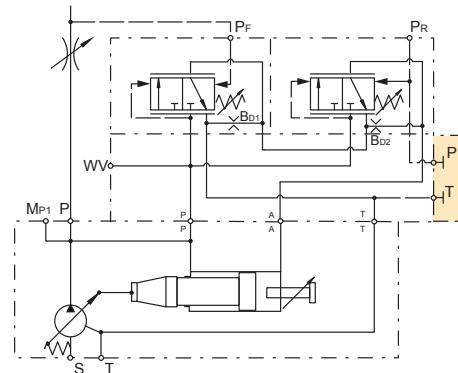


## Horse Power/Torque Controls with Pressure Control


### Control option \*LC

The horse power control type \*L\* provides the benefit of the pressure control, plus the ability to limit the input power the pump will draw. These controls are beneficial when the power available from the prime mover for the hydraulics is limited or the application power demand has both high flow/low pressure and low flow/high pressure duty cycles.


### Control schematics

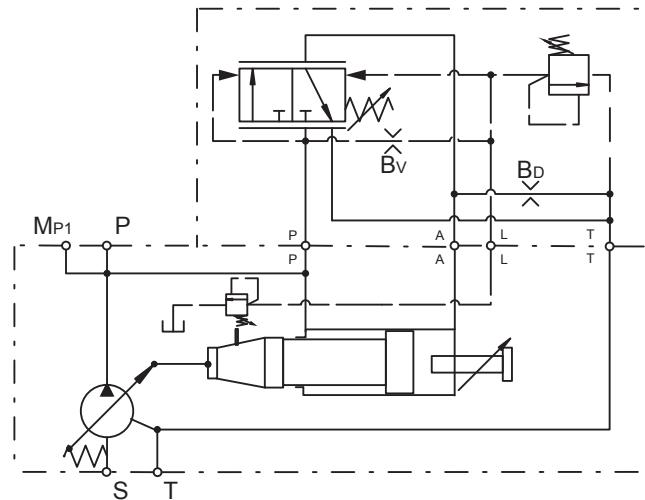

Response times of the pump are collected from a circuit as below by measuring the pumps swash angle movement at different pressures.

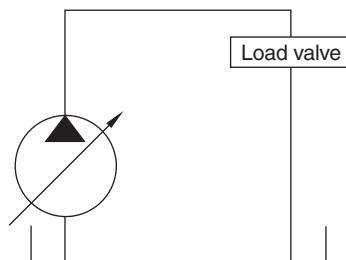

### Dynamic characteristic of flow control \*

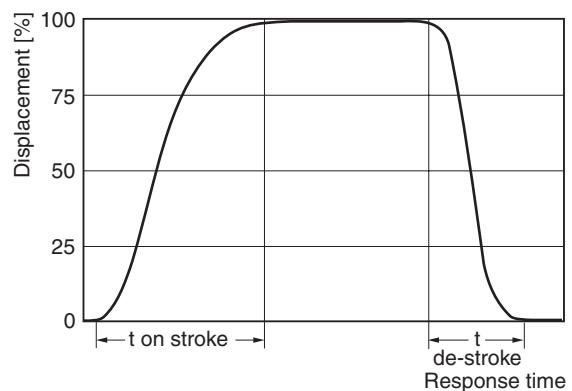

\* Curve shown exaggerated

|       | Time on-stroke [ms] |                 | Time de-stroke [ms] |                     |
|-------|---------------------|-----------------|---------------------|---------------------|
|       | against 50 bar      | against 350 bar | zero stroke 50 bar  | zero stroke 350 bar |
| PV360 | 90                  | 90              | 100                 | 100                 |

|  |                  |
|--|------------------|
| Pressure adjustment range              | 15 to 350 bar    |
| Factory setting pressure               | 350 bar          |
| Differential pressure adjustment range | 10 to 40 bar     |
| Factory setting differential pressure  | 15 bar           |
| Control oil consumption                | Max 8.0 l/min    |
| Typical pilot flow                     | approx 1.5 l/min |


See Horse Power characteristic curves on page 30

## Horse Power/Torque Control with NG6 Interface

### Control option \*L1

With code \*L1 the horse power control has a valve interface size NG 6 DIN 24340 (CETOP 03 acc. RP35H, NFPA D03) on the top side.

This interface allows the mounting of accessories like multiple pressure selectors without the need of external piping and valve mounting.

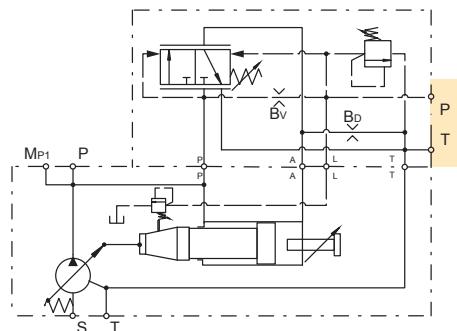


## Horse Power/Torque Control with Electrical Unloading

### Control option \*LW

With code \*LW a solenoid operated directional control valve (D1VW002KNJW) for electrical unloading is mounted on the control top side.

When the solenoid is de-energised, the pump compensates at a stand-by pressure of typically 15 bar. When the solenoid is energised, the pump compensates at the pressure adjusted on the integrated pilot valve.

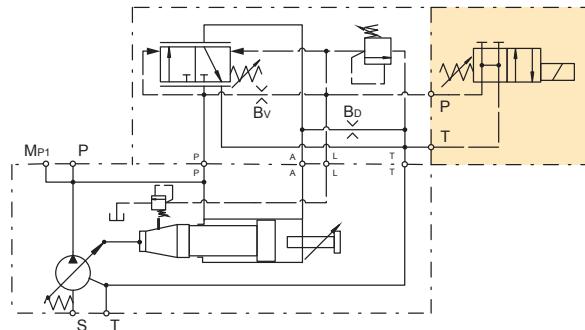


## Horse Power/Torque Control with Proportional Pilot Valve

### Control option \*LK

With code \*LK a proportional pilot valve of type PVACRE...K35 (see page 43) is mounted on the top side interface.


This allows a variation of the pump compensating pressure between 20 and 350 bar by an electrical signal.

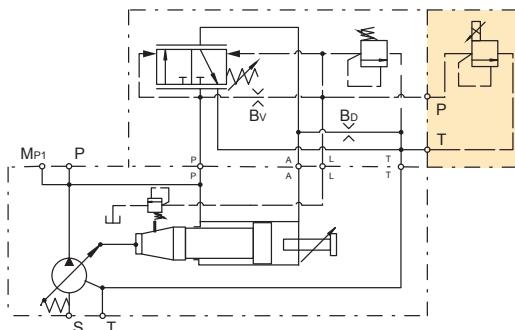

## Horse Power/Torque Control without Integrated Pressure Pilot Valve

### Control option \*LZ


Control \*LZ has no integrated pilot valve but a NG6 DIN 24340 interface topside.

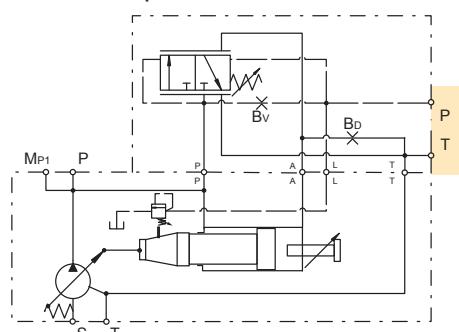

This version is recommended for valve accessories.

### Control option \*LB

Control \*LB has no integrated pilot valve.

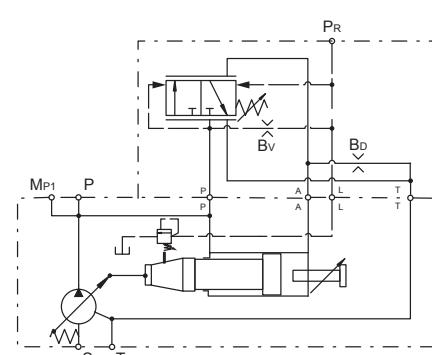


## Horse Power/Torque Controls with Load Sensing


### Control option \*CC

The horse power control type \*C\* provides the benefit of the load sensing control, plus the ability to limit the input power the pump will draw. These controls are beneficial when the power available from the prime mover for the hydraulics is limited or the application power demand has both high flow/low pressure and low flow/high pressure duty cycles.

### Control schematics

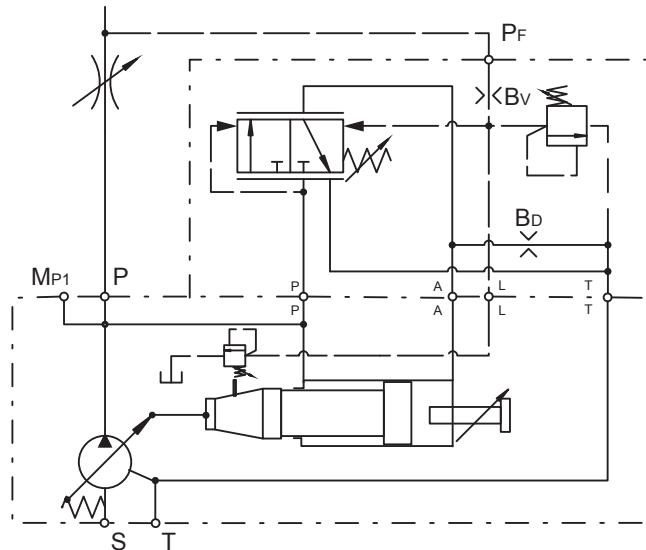


Response times of the pump are collected from a circuit as below by measuring the pumps swash angle movement at different pressures.

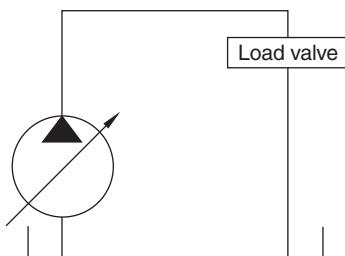

|       | Time on-stroke [ms] |                     | Time de-stroke [ms] |                     |
|-------|---------------------|---------------------|---------------------|---------------------|
|       | stand-by to 50 bar  | stand-by to 350 bar | 50 bar to stand-by  | 350 bar to stand-by |
| PV360 | 90                  | 90                  | 100                 | 100                 |

|  |                  |
|--|------------------|
| Pressure adjustment range              | 15 to 350 bar    |
| Factory setting pressure               | 350 bar          |
| Differential pressure adjustment range | 10 to 40 bar     |
| Factory setting differential pressure  | 15 bar           |
| Control oil consumption                | Max 8.0 l/min    |
| Typical pilot flow                     | approx 1.5 l/min |

### Dynamic characteristic of flow control \*

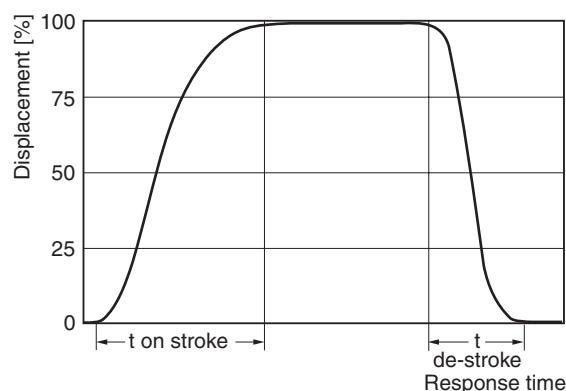

\* Curve shown exaggerated


See Horse Power characteristic curves on page 30

## Horse Power/Torque Control with Load Sensing & NG6 Interface

### Control option \*C1

With code \*C1 the horse power control has a valve interface size NG 6 DIN 24340 (CETOP 03 acc. RP35H, NFPA D03) on the top side.

This interface allows the mounting of accessories like multiple pressure selectors without the need of external piping and valve mounting.

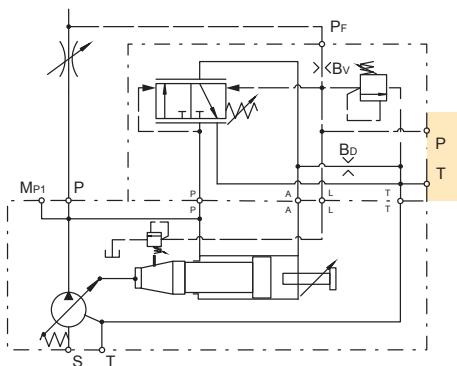


## Horse Power/Torque Control with Load Sensing & Electrical Unloading

### Control option \*CW

With code \*CW a solenoid operated directional control valve (D1VW002KNJW) for electrical unloading is mounted on the control top side.

When the solenoid is de-energised, the pump compensates at a stand-by pressure of typically 15 bar. When the solenoid is energised, the pump compensates at the pressure adjusted on the integrated pilot valve.

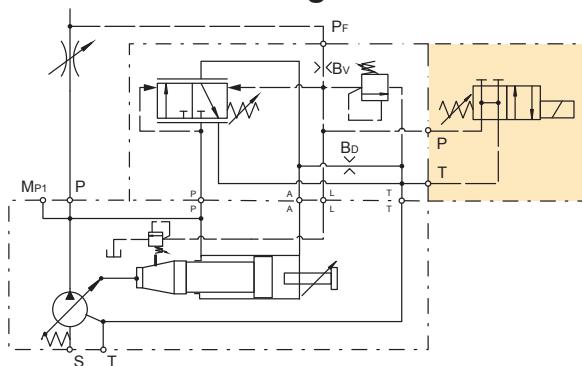


## Horse Power/Torque Control with Load Sensing & Proportional Valve

### Control option \*CK

With code \*CK a proportional pilot valve of type PVACRE...K35 (see page 43) is mounted on the top side interface.


This allows a variation of the pump compensating pressure between 20 and 350 bar by an electrical signal.

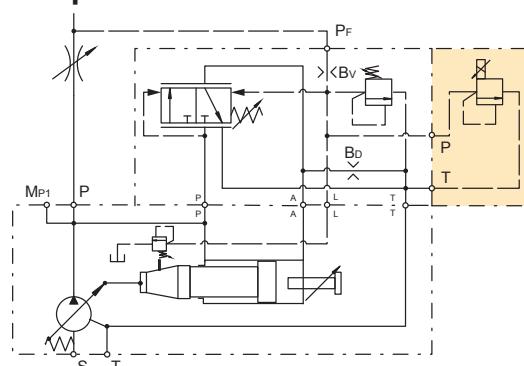

## Horse Power/Torque Control with Load Sensing without Integrated Pilot Valve


### Control option \*CZ

Control \*CZ has no integrated pilot valve but NG6 DIN 24340 interface topside.




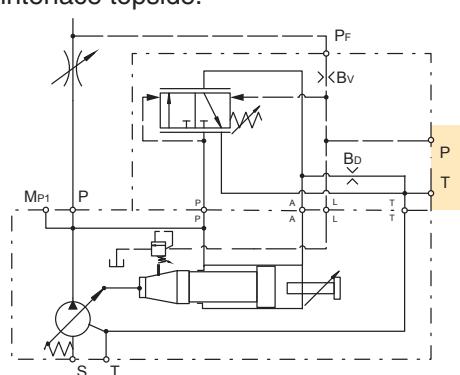


### Control option \*CB




Control \*CB has no integrated pilot valve.

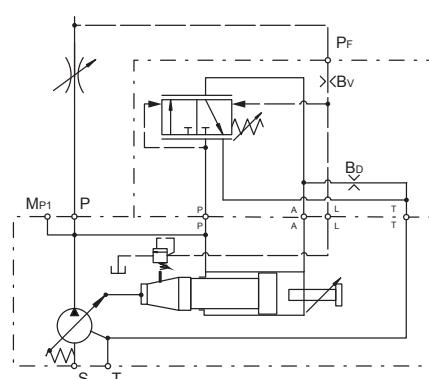

**Typical Horse Power/Torque Control Characteristics**

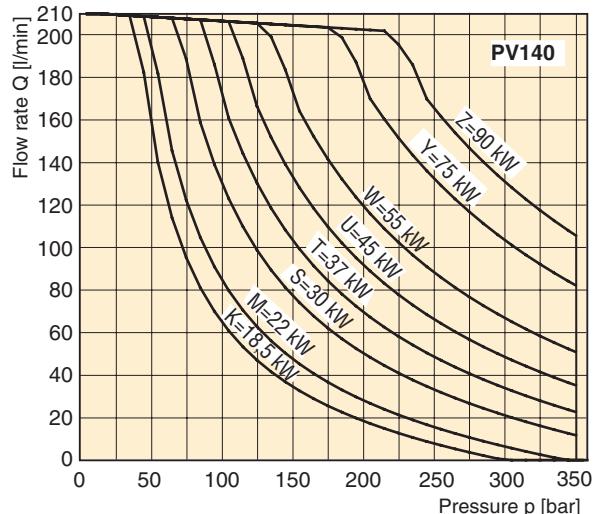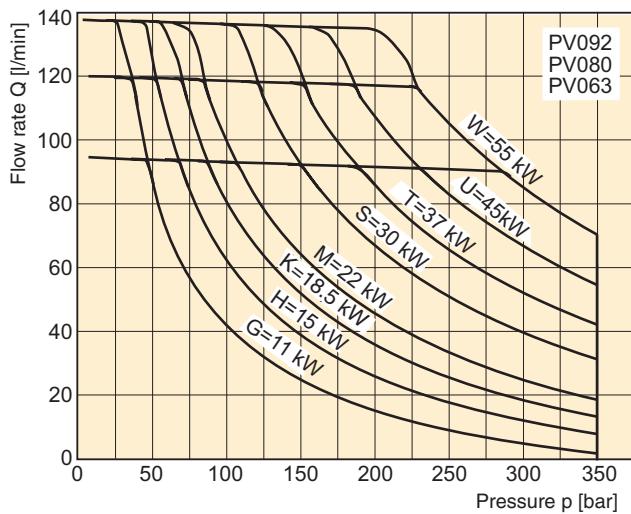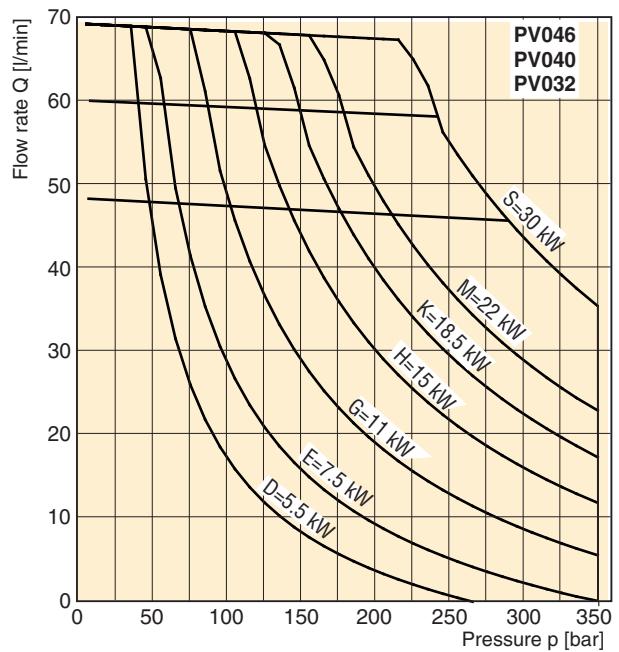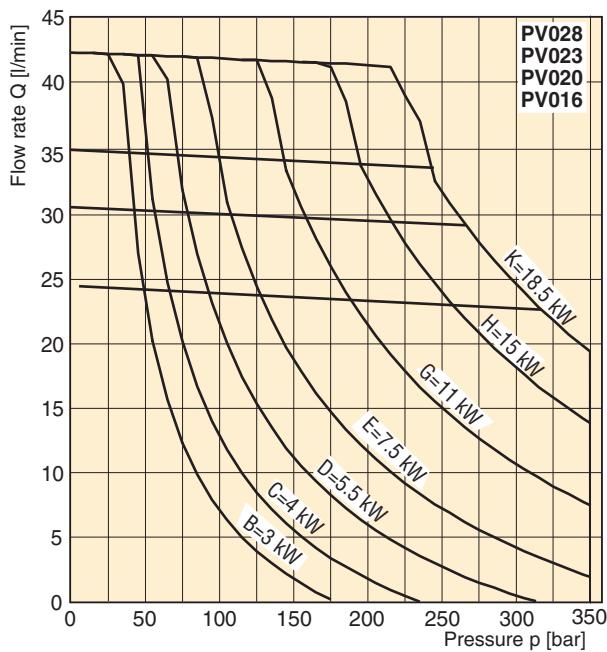

**Typical Horse Power/Torque Control Characteristics**

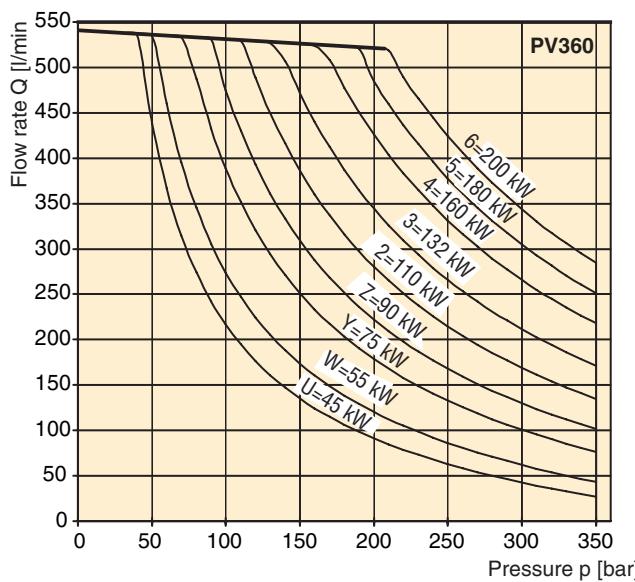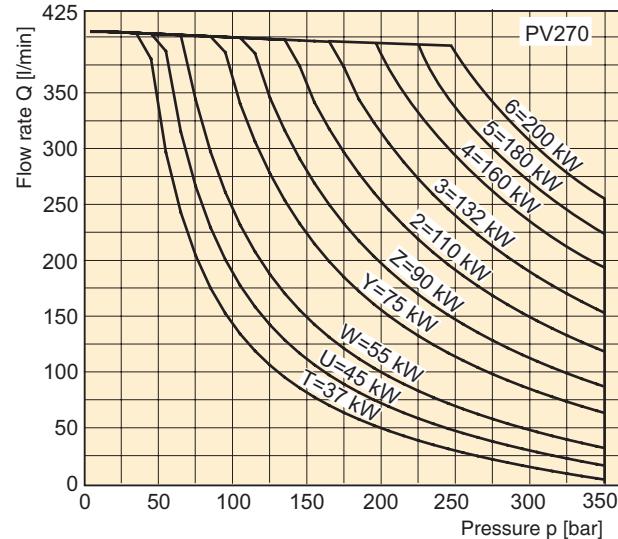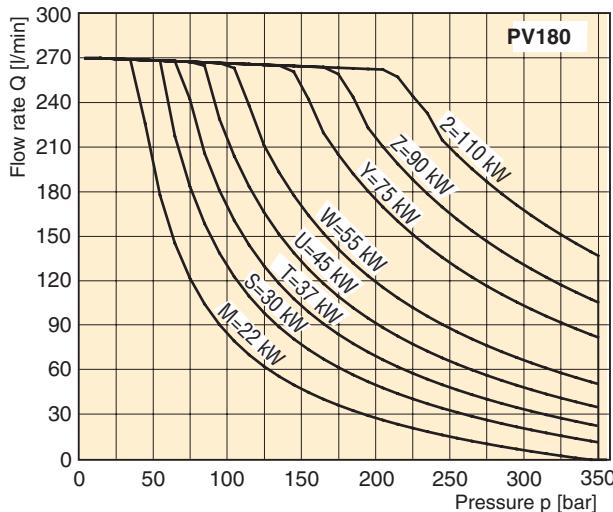


Speed :  $n = 1500$  rev/min  
 Temperature :  $t = 50$  °C  
 Fluid : HLP, ISO VG46  
 Viscosity :  $v = 46$  mm<sup>2</sup>/s at 40 °C  
 Pressure : Maximum 350 bar, depending on HP level

## Proportional Displacement Control


### Control option FDV

The proportional displacement control allows the adjustment of the pump's output flow by an electrical input signal. The actual displacement of the pump is monitored by an electronic displacement sensor and compared with the commanded displacement in an electronic control module PQDXXA-Z10. The command is given as an electrical input signal (0 - 10 V alternatively 4 - 20 mA) from the supervising machine control or a potentiometer. Version FDV of the proportional control does not provide a pressure compensation. Therefore the hydraulic circuit must be protected by a pressure relief valve.

### Control schematics

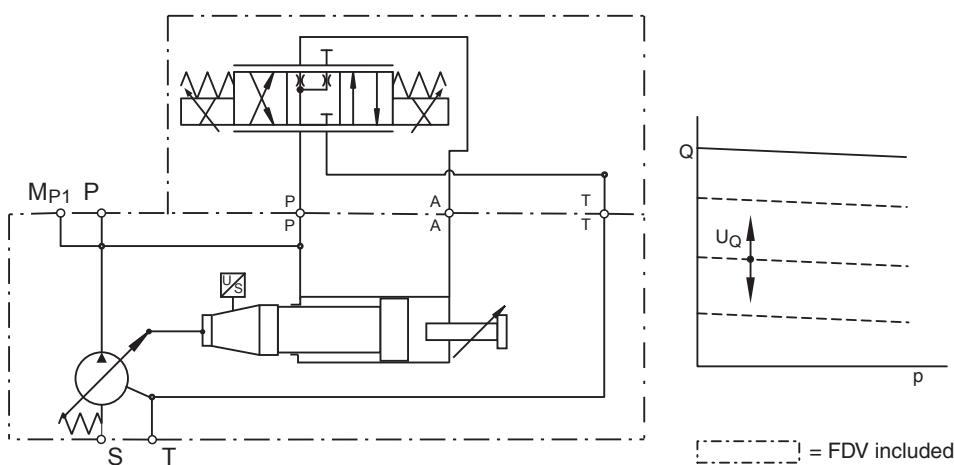


Response times of the pump are collected from a circuit as below by measuring the pumps swash angle movement at different pressures.

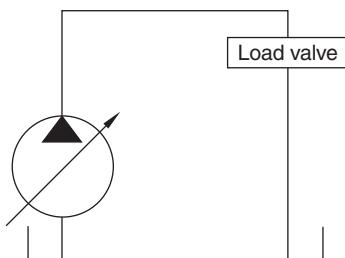

|       | Time on-stroke [ms] |                     | Time de-stroke [ms] |                     |
|-------|---------------------|---------------------|---------------------|---------------------|
|       | stand-by to 50 bar  | stand-by to 350 bar | 50 bar to stand-by  | 350 bar to stand-by |
| PV360 | 255                 | 154                 | 266                 | 183                 |

### Dynamic characteristic of flow control \*

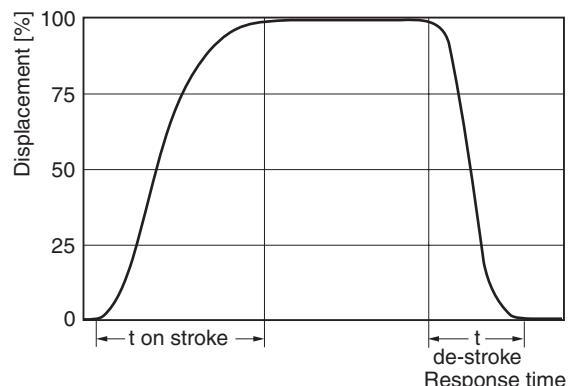

\* Curve shown exaggerated

|  |               |
|--|---------------|
| Pressure adjustment range*               | 35 to 350 bar |
| Differential pressure adjustment range * | 10 to 40 bar  |
| Factory setting differential pressure *  | 15 bar        |
| Control oil consumption (FDV only)       | Max 0.3 l/min |

| Internal pilot pressure required to control the pump |        |
|--|--------|
| FDV  | 15 bar |
| UDR  | 25 bar |
| UDK  | 25 bar |
| UDM  | 25 bar |


\* Data valid for UD\* version

## Proportional Displacement Control with Overriding Pressure Control

### Control option UDR

Control version UDR provides electro-hydraulic displacement control and pressure stage mounted on an elbow manifold.

The elbow manifold provides NG6/D03 interface on top to mount a pressure pilot valve (not included in UDR).

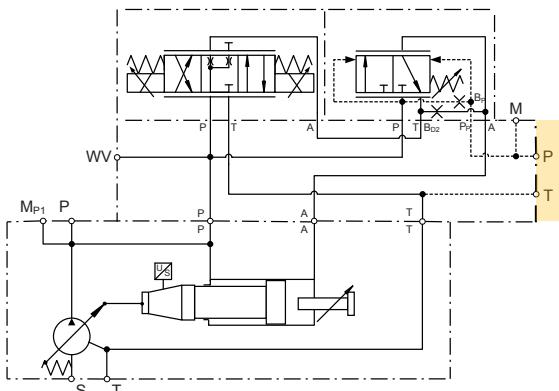


## Proportional Displacement Control with Proportional Pressure Control

### Control option UDK

Control version UDK features proportional pressure pilot valve PVACRE...K35, which enables for electro-hydraulic p/Q control.



By using the digital module PQDXXA-Z10 it is possible to control the displacement proportionally with overriding open loop proportional pressure control.

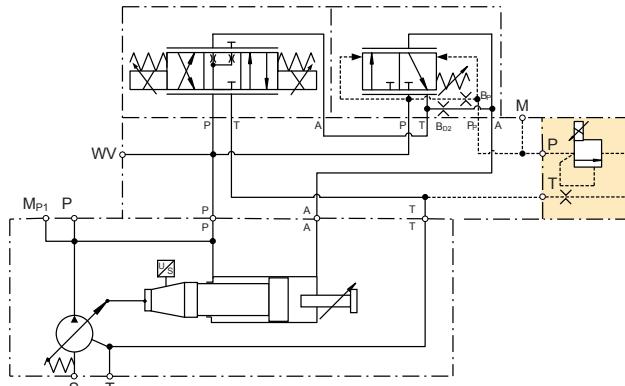

## Proportional Displacement Control with Closed Loop Pressure Control

### Control option UDM


Control version UDM includes pressure transducer Parker SCP 8181 CE. In combination with control module PQDXXA-Z10 both closed loop pressure control as well as electronic power limitation can be realized.

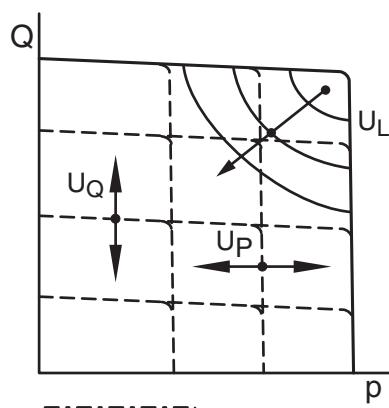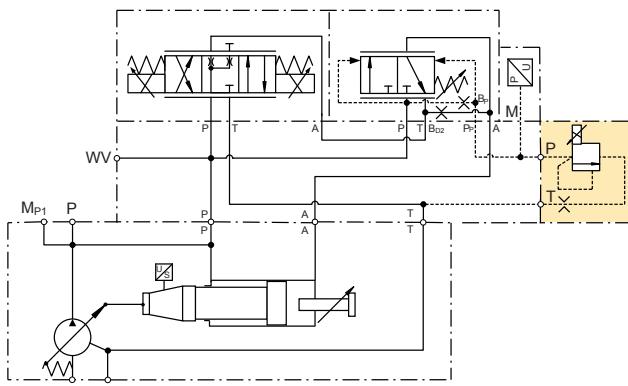


= UD\* included

## Efficiency, power consumption


## PV016

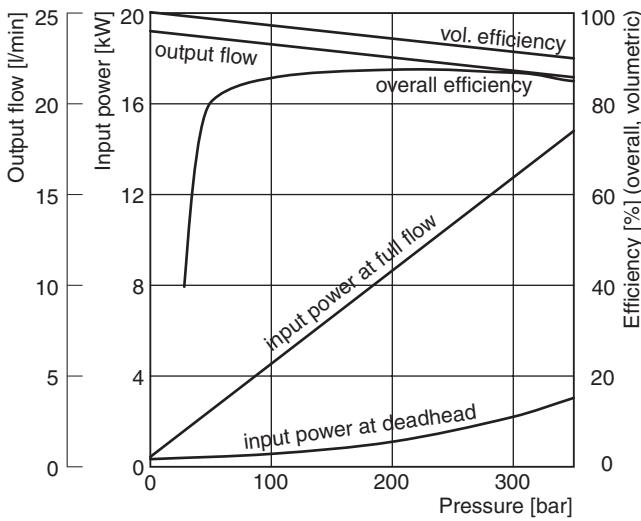

## PV020

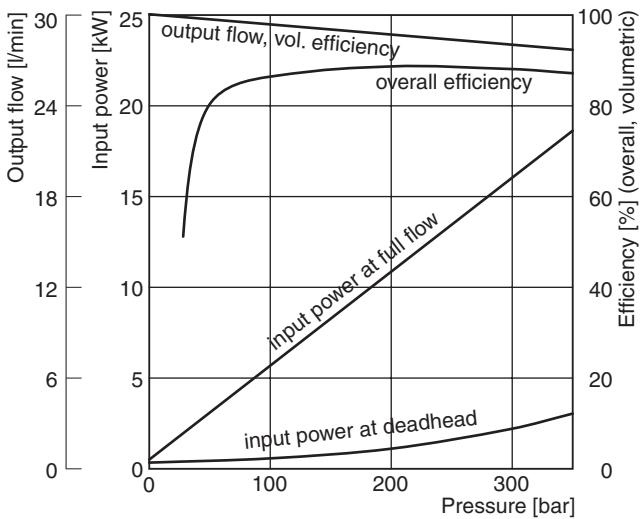

## PV023

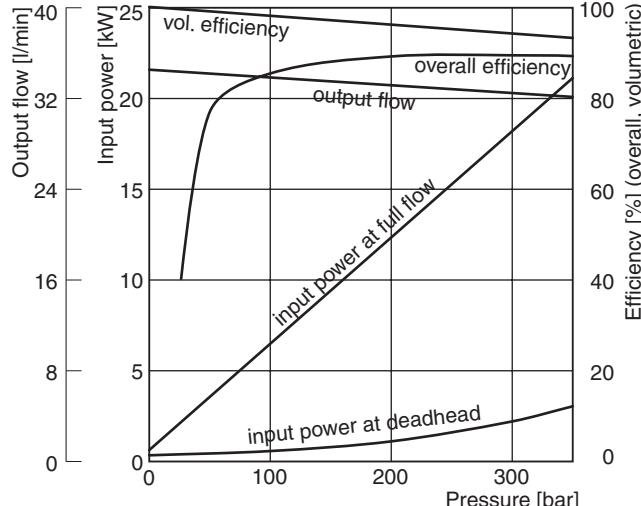


## Efficiency and case drain flows PV016, PV020, PV023 and PV028

The efficiency and power graphs are measured at an input speed of  $n = 1500$  rpm, a temperature of  $50^\circ\text{C}$  and a fluid viscosity of  $30 \text{ mm}^2/\text{s}$ .


Case drain flow and compensator control flow leave via the drain port of the pump. To the values shown are to be added 1 to 1.2 l/min, if at pilot operated compensators the control flow of the pressure pilot valve also goes through the pump.

**Please note:** The values shown below are only valid for static operation. Under dynamic conditions and at rapid compensation of the pump the volume displaced by the servo piston also leaves the case drain port. This dynamic control flow can reach up to 40 l/min! Therefore the case drain line is to lead to the reservoir at full size and without restrictions as short and direct as possible.


## Case drain flow PV016-028 with pressure compensator

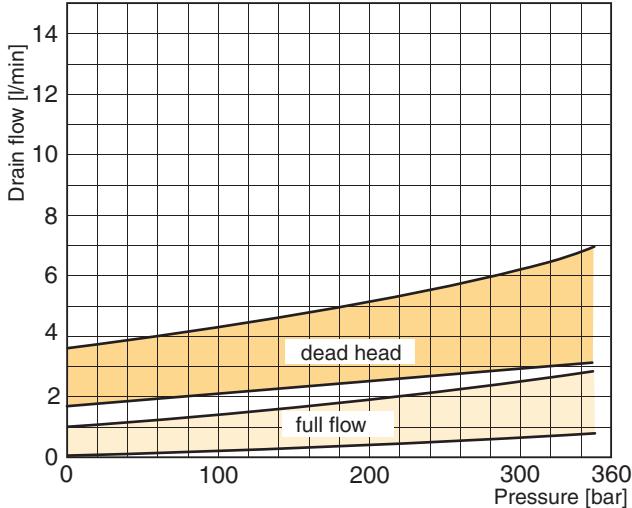


## PV028

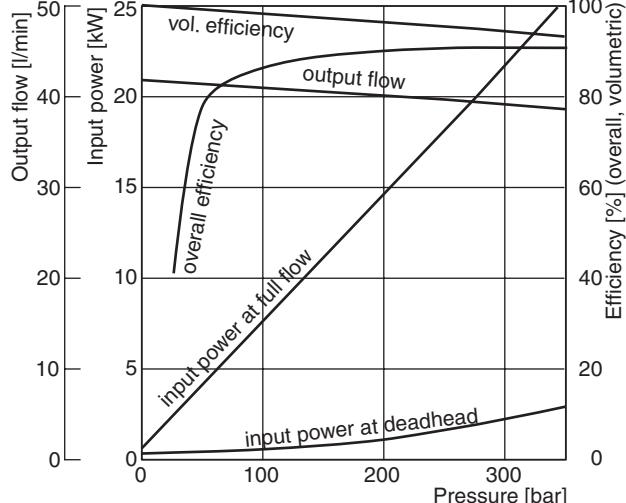


**Efficiency, power consumption  
PV032**

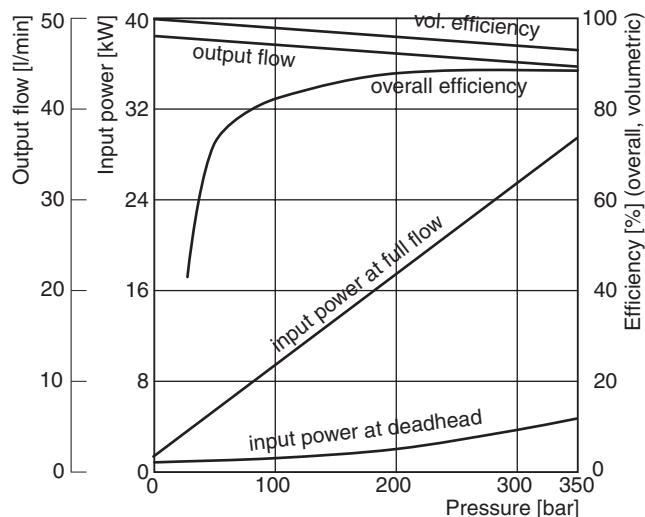

**PV040**

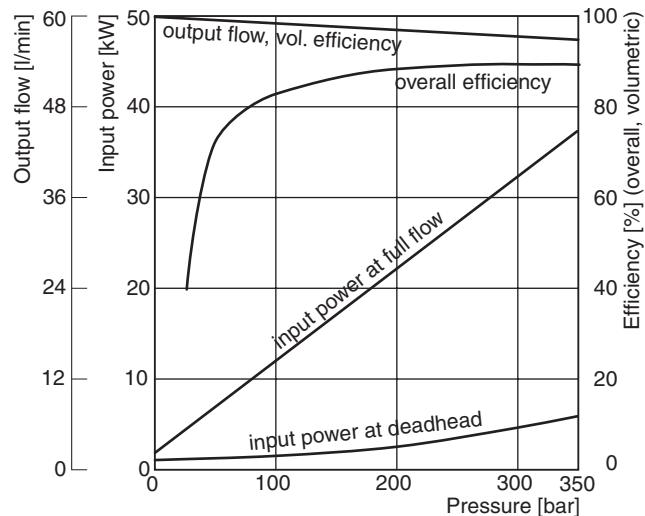

**PV046**

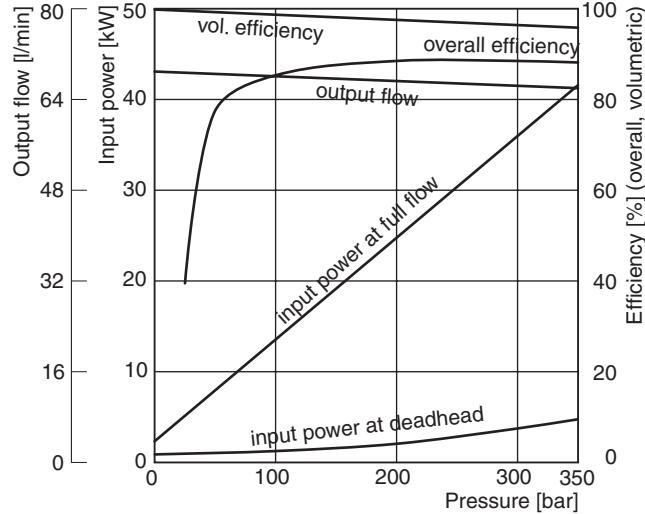


**Efficiency and case drain flows PV032 to PV046**

The efficiency and power graphs are measured at an input speed of  $n = 1500$  rpm, a temperature of  $50^\circ\text{C}$  and a fluid viscosity of  $30 \text{ mm}^2/\text{s}$ .

Case drain flow and compensator control flow leave via the drain port of the pump. To the values shown are to be added 1 to 1.2 l/min, if at pilot operated compensators the control flow of the pressure pilot valve also goes through the pump.


**Please note:** The values shown below are only valid for static operation. Under dynamic conditions and at rapid compensation of the pump the volume displaced by the servo piston also leaves the case drain port. This dynamic control flow can reach up to 60 l/min! Therefore the case drain line is to lead to the reservoir at full size and without restrictions as short and direct as possible.

**Case drain flow PV032-046 with pressure compensator**

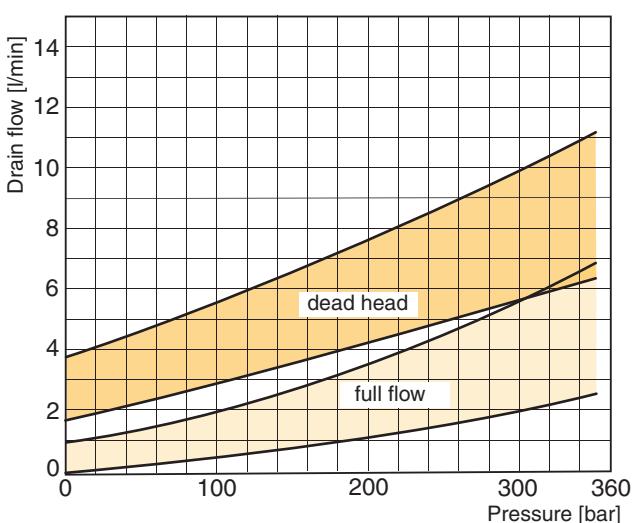


## Efficiency, power consumption


## PV063

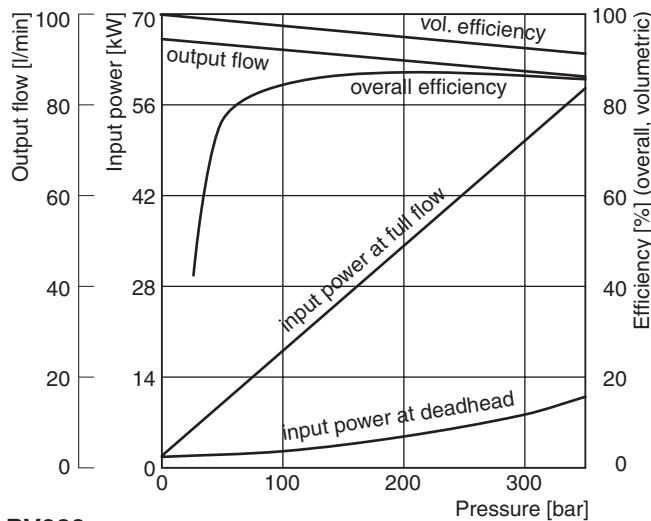

## PV080

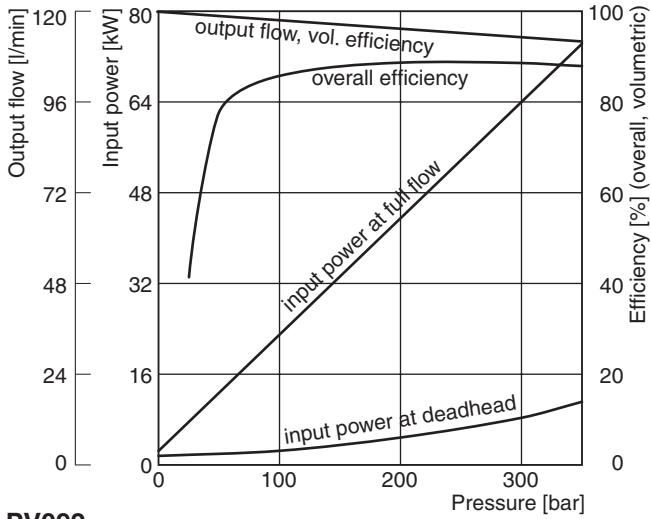

## PV092

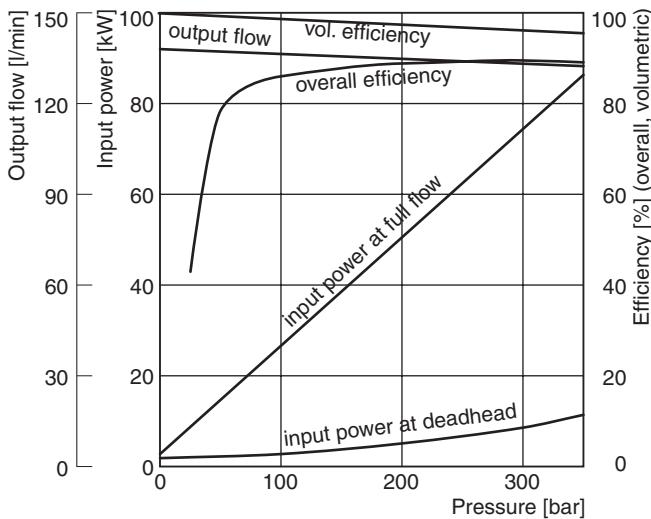


## Efficiency and case drain flows PV063, PV080, PV092

The efficiency and power graphs are measured at an input speed of  $n = 1500$  rpm, a temperature of  $50^\circ\text{C}$  and a fluid viscosity of  $30 \text{ mm}^2/\text{s}$ .

Case drain flow and compensator control flow leave via the drain port of the pump. To the values shown are to be added 1 to 1.2 l/min, if at pilot operated compensators the control flow of the pressure pilot valve also goes through the pump.


**Please note:** The values shown below are only valid for static operation. Under dynamic conditions and at rapid compensation of the pump the volume displaced by the servo piston also leaves the case drain port. This dynamic control flow can reach up to 80 l/min! Therefore the case drain line is to lead to the reservoir at full size and without restrictions as short and direct as possible.

## Case drain flows PV063-092

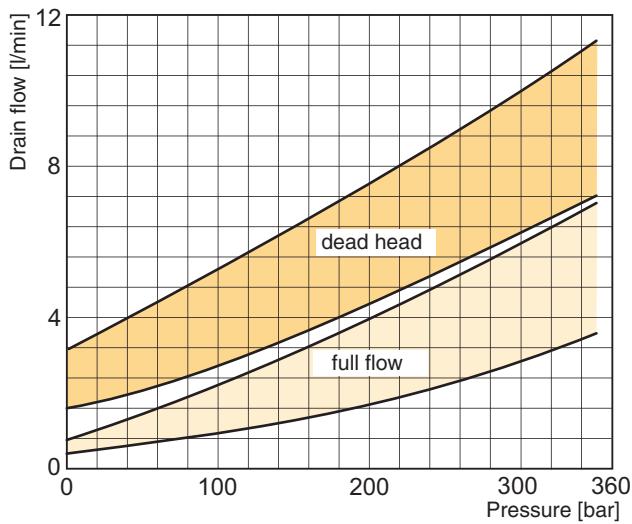


**Efficiency, power consumption**

**PV140**

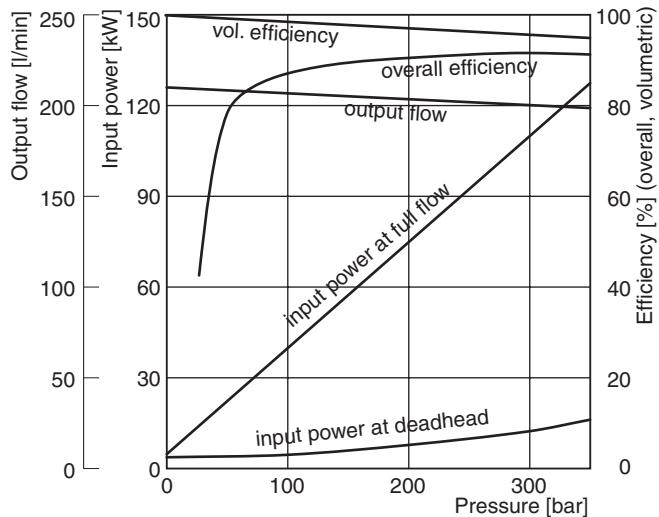

**PV180**

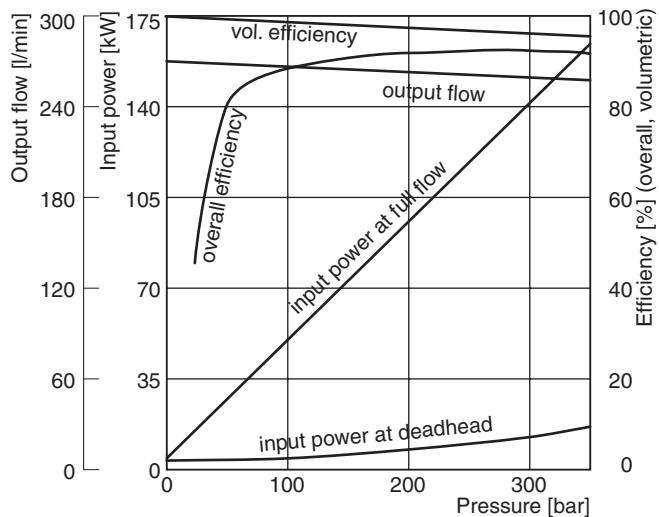


**Efficiency and case drain flows PV140, PV180**

The efficiency and power graphs are measured at an input speed of  $n = 1500$  rpm, a temperature of  $50^\circ\text{C}$  and a fluid viscosity of  $30 \text{ mm}^2/\text{s}$ .

Case drain flow and compensator control flow leave via the drain port of the pump. To the values shown are to be added 1 to 1.2 l/min, if at pilot operated compensators the control flow of the pressure pilot valve also goes through the pump.


**Please note:** The values shown below are only valid for static operation. Under dynamic conditions and at rapid compensation of the pump the volume displaced by the servo piston also leaves the case drain port. This dynamic control flow can reach up to 120 l/min! Therefore the case drain line is to lead to the reservoir at full size and without restrictions as short and direct as possible.

**Case drain flows PV140-180**

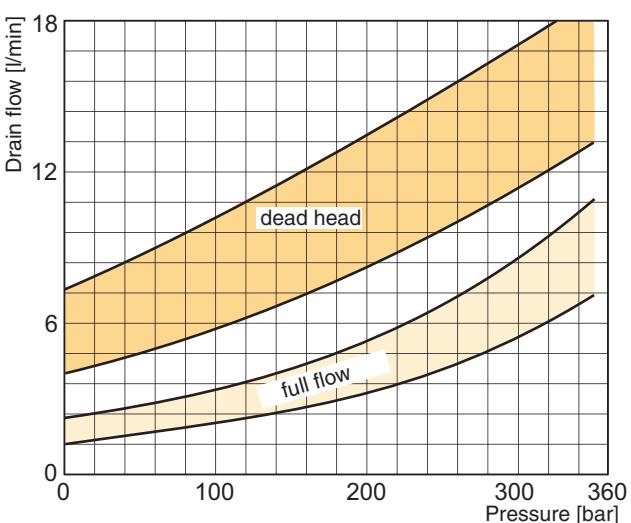


## Efficiency, power consumption

PV270

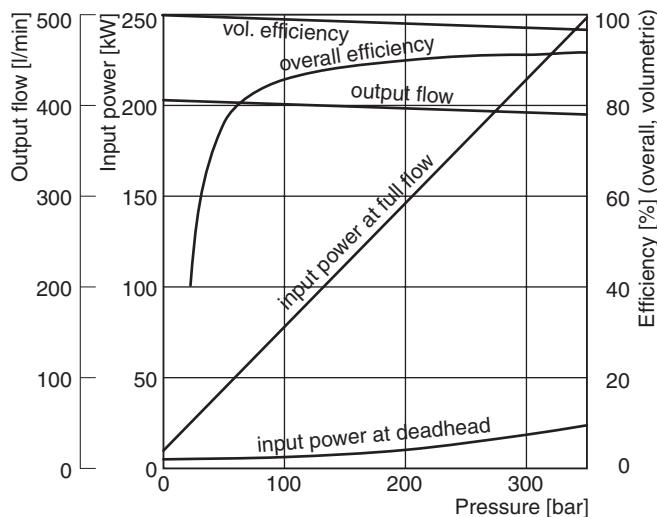

## Case drain flows PV270

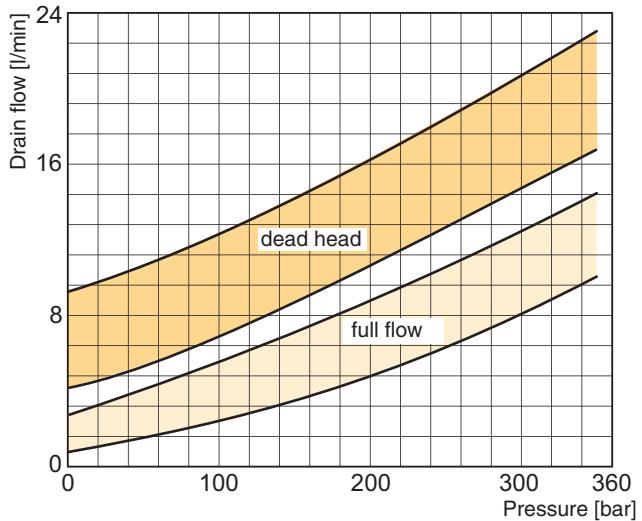


## Efficiency and case drain flows PV270

The efficiency and power graphs are measured at an input speed of  $n = 1500$  rpm, a temperature of  $50$  °C and a fluid viscosity of  $30$  mm $^2$ /s.


Case drain flow and compensator control flow leave via the drain port of the pump. To the values shown are to be added 1 to 1.2 l/min, if at pilot operated compensators the control flow of the pressure pilot valve also goes through the pump.

**Please note:** The values shown below are only valid for static operation. Under dynamic conditions and at rapid compensation of the pump the volume displaced by the servo piston also leaves the case drain port. This dynamic control flow can reach up to 120 l/min! Therefore the case drain line is to lead to the reservoir at full size and without restrictions as short and direct as possible.


**Typical inlet characteristics vs. speed at various percentage displacements**  
**Inlet characteristics PV360**

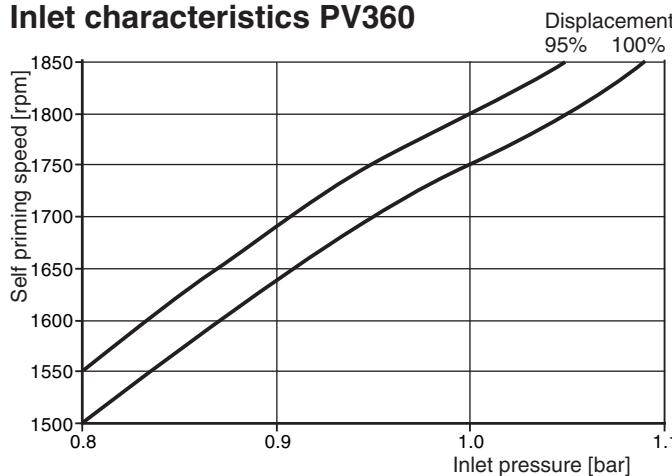


**Typical efficiency at full displacement and 1500 rpm PV360**

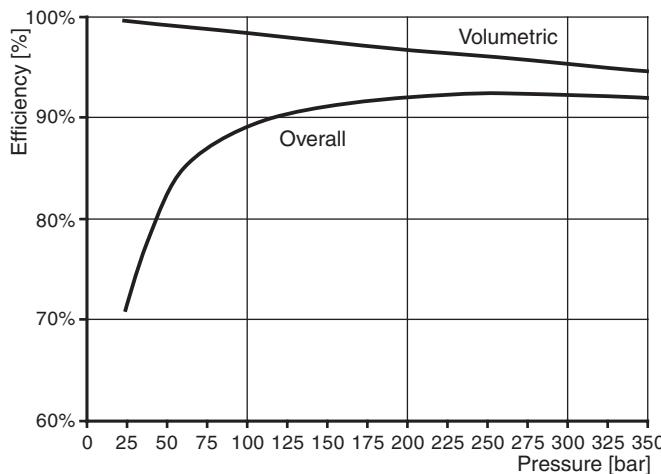


**Case drain flows PV360**

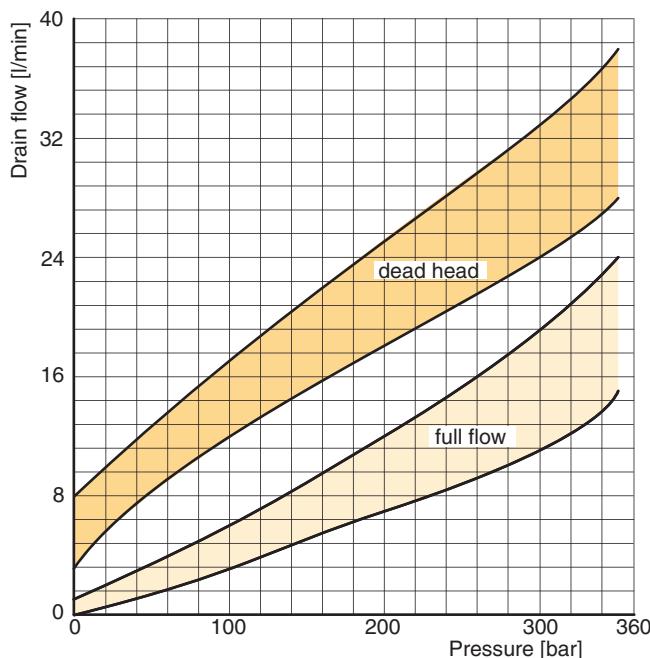

**Typical drive power at full displacement**  
**Input power – full stroke PV360**

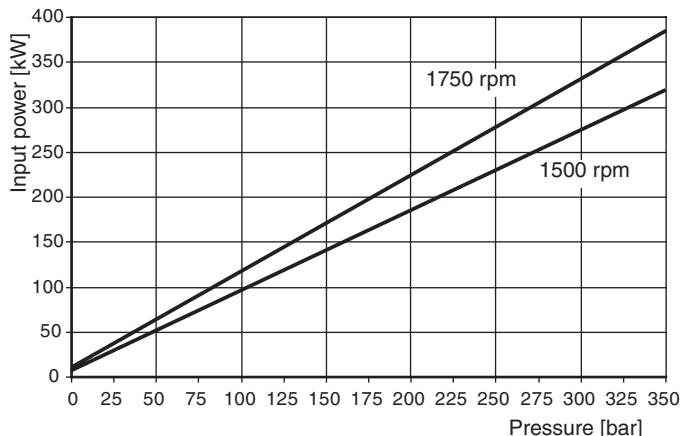

**Typical compensated power**  
**Input power – zero stroke PV360**

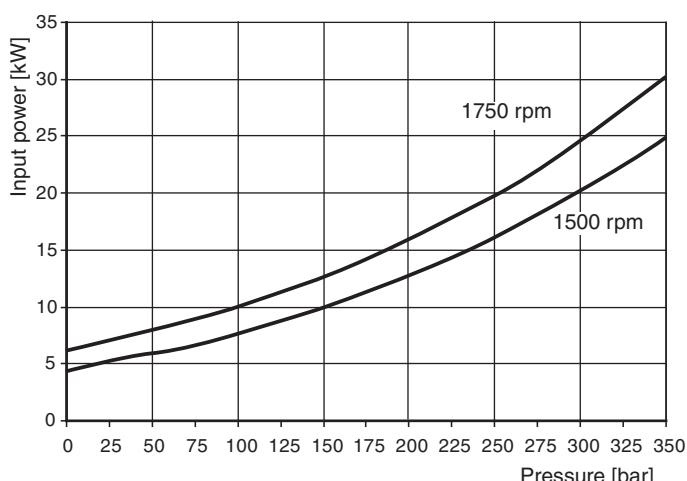


The curves show typical characteristics measured under following conditions:  
Fluid: Mineral oil ISO VG 22 at 32 °C  
Inlet pressure 1,0 bar (absolute), measured at inlet port.

| PV                 | AC                       | Function | Mounting bolts | Threads | Seals | Adjustment             | Solenoid | Solenoid accessories | Nominal pressure |  |
|--------------------|--------------------------|----------|----------------|---------|-------|------------------------|----------|----------------------|------------------|--|
| For PV pump series | Accessories for controls |          |                |         |       |                        |          |                      |                  |  |
|                    |                          |          |                |         | Code  | Threads                |          |                      |                  |  |
|                    |                          |          |                |         | M     | Metric                 |          |                      |                  |  |
|                    |                          |          |                |         | S     | SAE / UNC              |          |                      |                  |  |
|                    |                          |          |                |         | Code  | Seals                  |          |                      |                  |  |
|                    |                          |          |                |         | N     | NBR                    |          |                      |                  |  |
|                    |                          |          |                |         | V     | FPM                    |          |                      |                  |  |
|                    |                          |          |                |         | Code  | Mounting bolts         |          |                      |                  |  |
|                    |                          |          |                |         | C     | For single controls    |          |                      |                  |  |
|                    |                          |          |                |         | S     | Without bolts          |          |                      |                  |  |
|                    |                          |          |                |         | M     | For code UD*/MT*       |          |                      |                  |  |
|                    |                          |          |                |         | Code  | Adjustment             |          |                      |                  |  |
|                    |                          |          |                |         | S     | Spindle with lock nut  |          |                      |                  |  |
|                    |                          |          |                |         | L     | DIN lock <sup>1)</sup> |          |                      |                  |  |
|                    |                          |          |                |         | Code  | Solenoid voltage       |          |                      |                  |  |
|                    |                          |          |                |         | omit  | For function 1P        |          |                      |                  |  |
|                    |                          |          |                |         | Y     | 110V/50Hz - 120V/60Hz  |          |                      |                  |  |
|                    |                          |          |                |         | T     | 220V/50Hz - 240V/60Hz  |          |                      |                  |  |
|                    |                          |          |                |         | J     | 24V DC                 |          |                      |                  |  |


1) only for 1P & 2P

## Dimensions


### PVAC1P\*

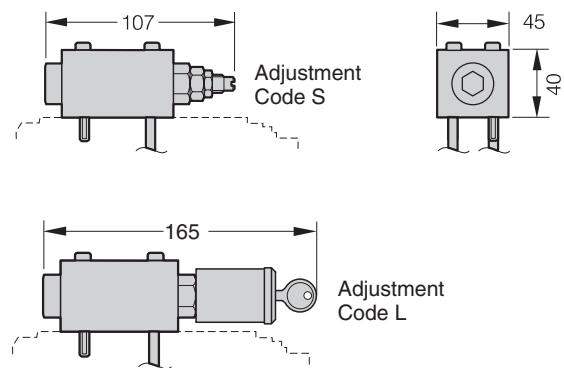


### PVAC1E\*

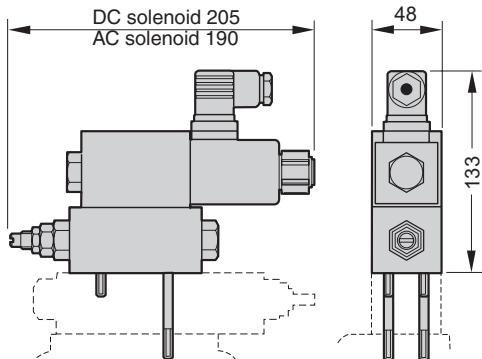


### PVAC2P\*

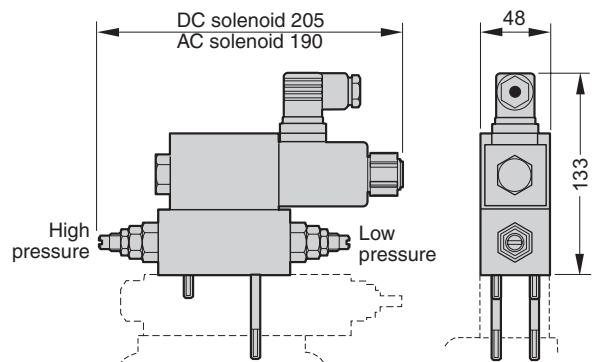


### PVAC2M\*/PVAC2E\*

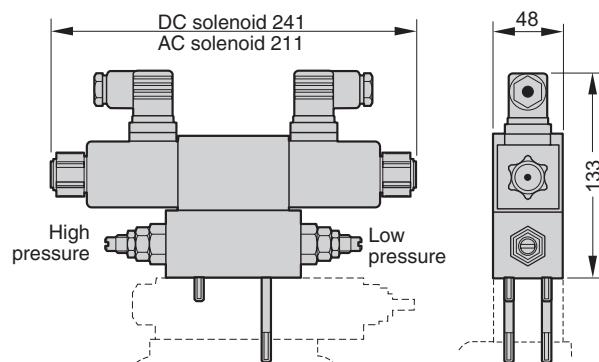


**Schematics PVAC1P\***

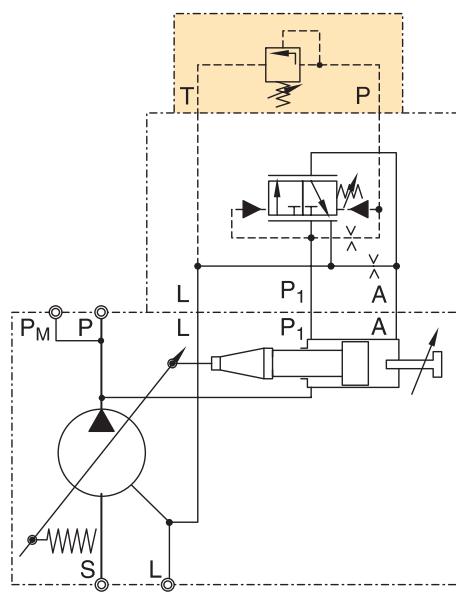


**Schematics PVAC1E\***

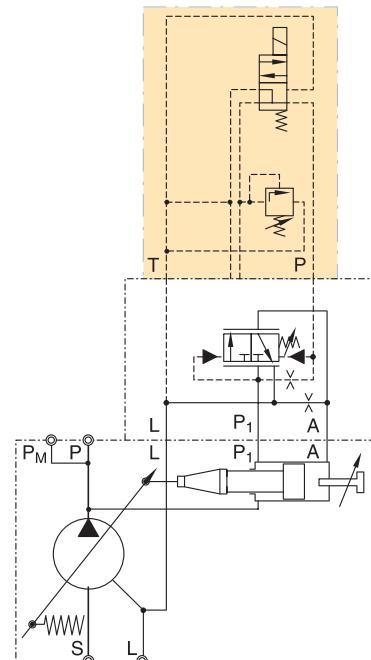

**Schematics PVAC2P\***

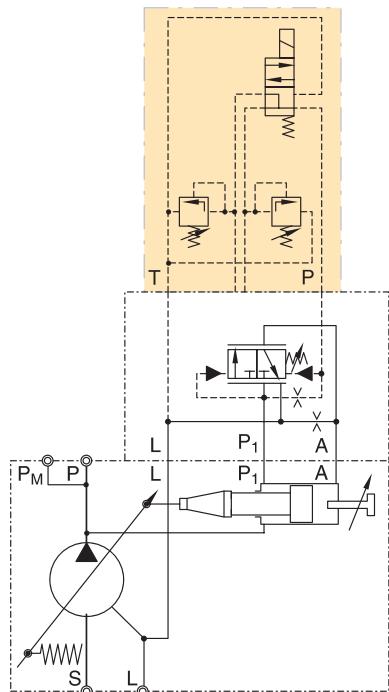

**Schematics PVAC2M\*/PVAC2E\***


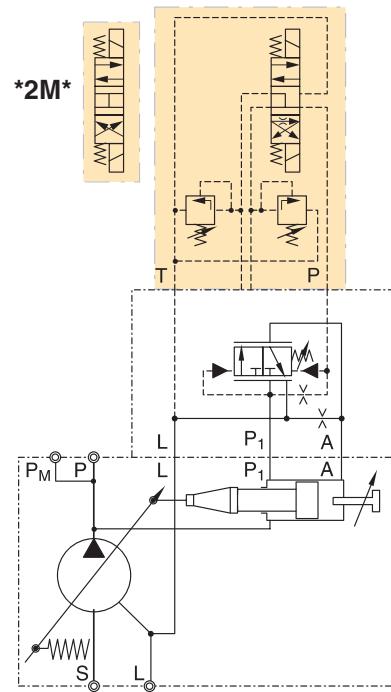


## Proportional pressure relief valve PVACRE\*

### Function

When the pressure in port P exceeds the pressure setting at the solenoid, the poppet opens to port T and limits the pressure in port P to the adjusted level.


The optimum performance can be achieved in combination with the digital amplifier module PCD00A-400 (see catalogue HY11-3500 for reference).

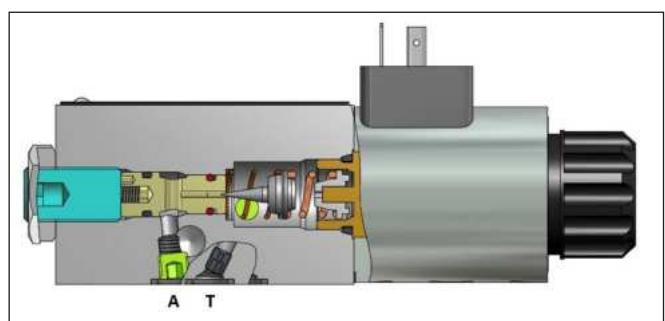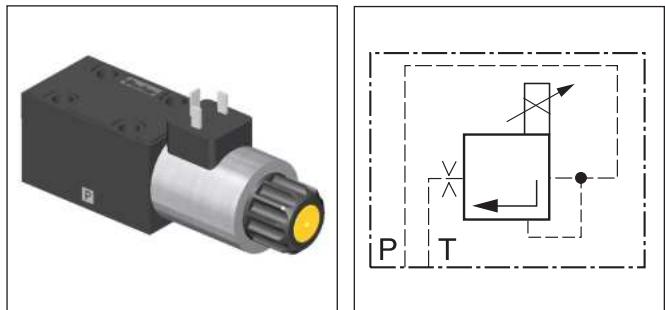

### Technical data


| General                             |   |
|-------------------------------------|---|
| Nominal size                        | DIN NG06 / CETOP03 / NFPA D03                           |
| Mounting position                   | as desired, horizontal mounting preferred               |
| Ambient temperature                 | [°C] -20 ... +70  |
| Weight                              | [kg] 1.8  |
| Hydraulic                           |   |
| Max. operating pressure             | [bar] Port P up to 420; port T depressurized            |
| Pressure stages                     | [bar] 350, 420  |
| Fluid                               | Hydraulic oil as per DIN 51524 ... 525                  |
| Viscosity, recommended<br>permitted | [cSt]/ [mm²/s] 30 ... 80<br>[cSt]/ [mm²/s] 12 ... 380   |
| Fluid temperature                   | [°C] -20 ... +60  |
| Filtration                          | ISO 4406 (1999), 18/16/13                               |
| Linearity                           | [%] ±4  |
| Repeatability                       | [%] ±2  |
| Hysteresis                          | [%] ±4.5 of p <sub>max</sub>                            |
| Electrical                          |   |
| Duty ratio                          | [%] 100 ED  |
| Protection class                    | IP 65 in accordance with EN 60529 (plugged and mounted) |
| Nominal voltage                     | [V] 12 (2.2 A for nominal pressure)                     |
| Coil resistance                     | [Ohm] 4.4 at 20°C                                       |
| Solenoid connection                 | Connector as per EN 175301-803                          |
| Power amplifier, recommended        | PCD00A-400, PWDXXA                                      |

## Ordering code proportional pressure relief valve

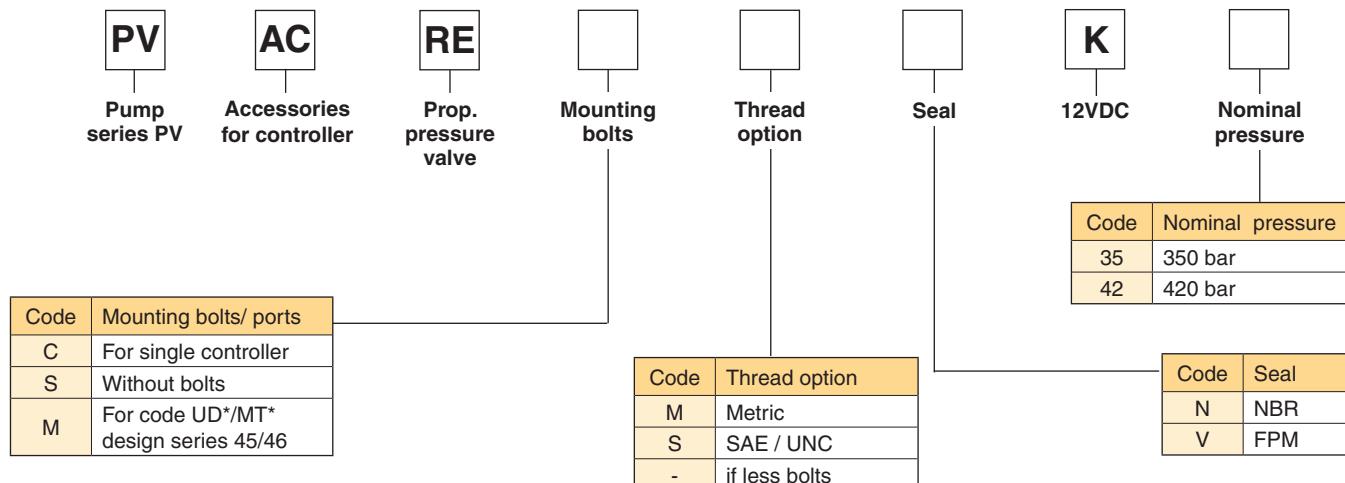


## Schematic PVACRE\*


### Example for PVACRE\* mounted

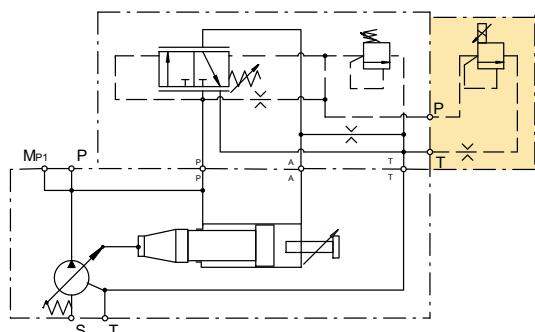

## Dimensions PVACRE\*

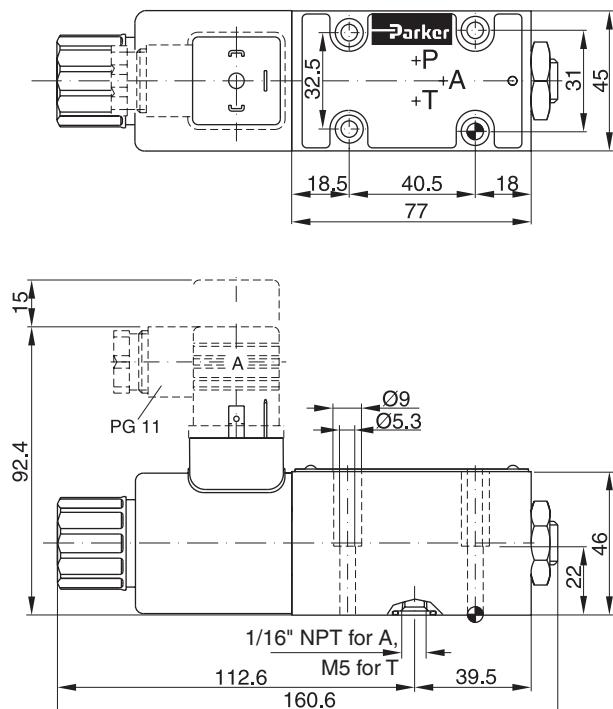


**PV016 - 028, metric version**

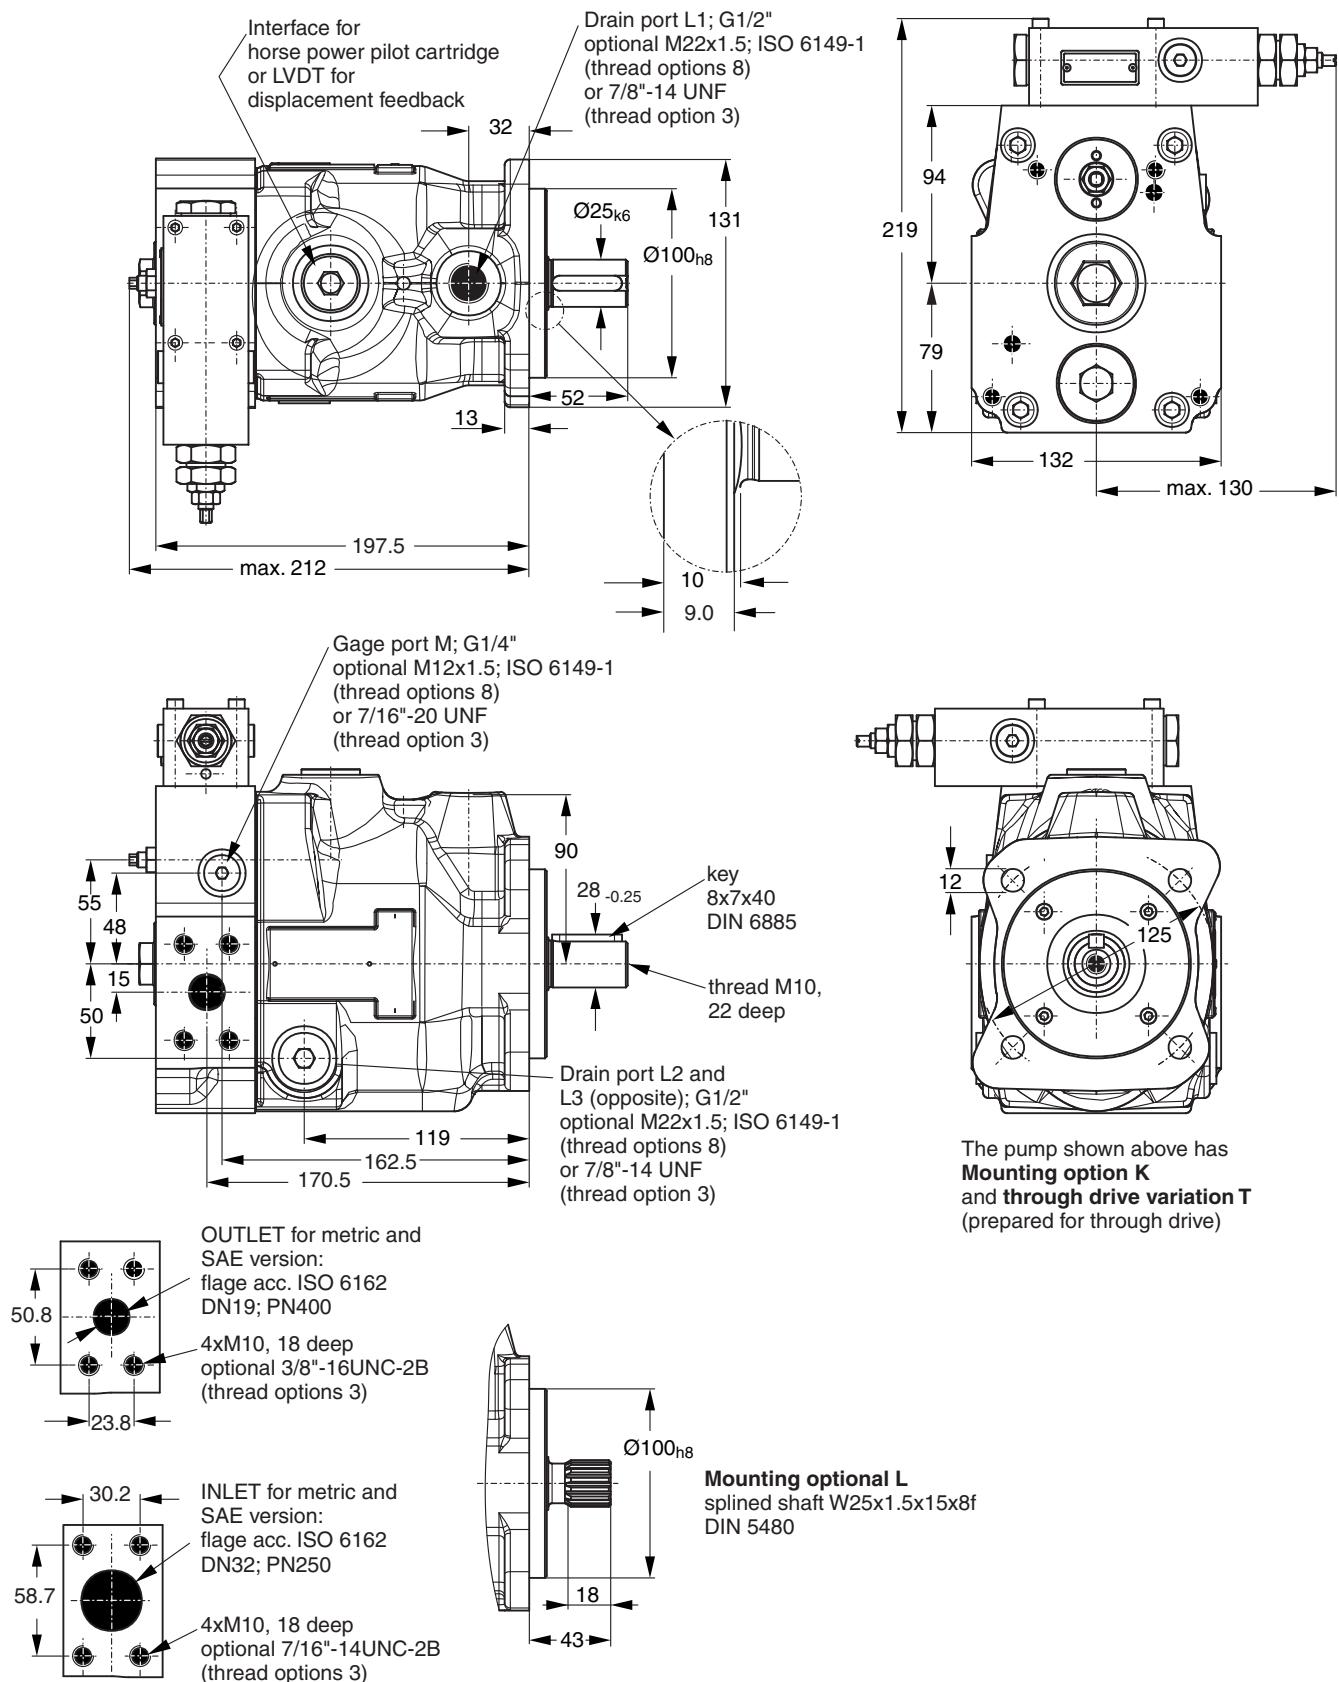


The pump shown above has  
**Mounting option K**  
**and through drive variation T**  
 (prepared for through drive)

Shown is a clockwise rotating pump with standard pressure compensator.  
 Counter clockwise rotating pumps have inlet, outlet and gage port reversed.


**PV016 - 028, SAE version**

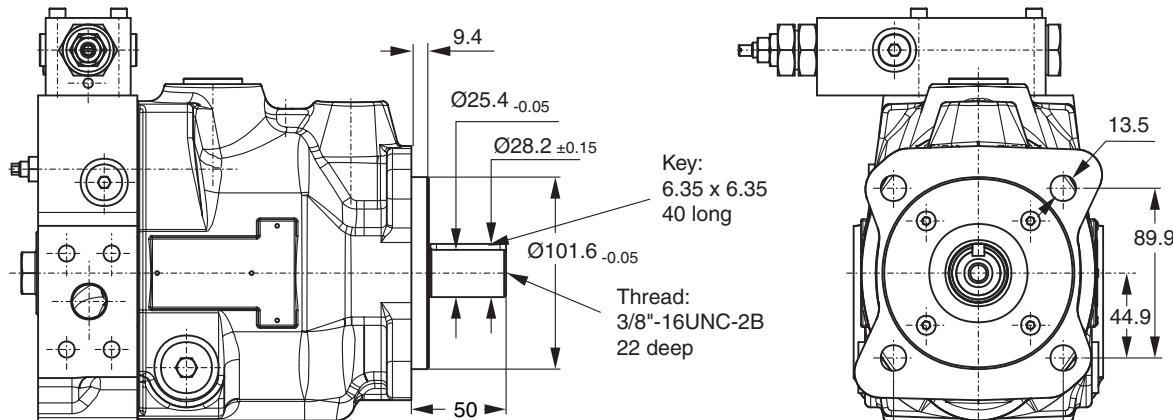

Shown above is  
**Mounting option D**

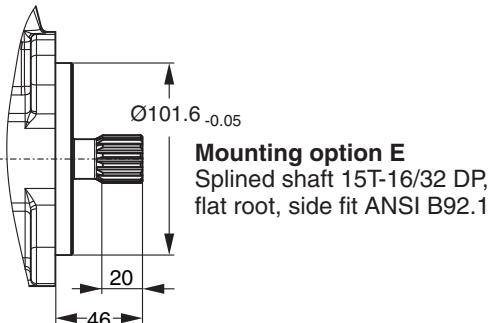


**Variation with through drive**

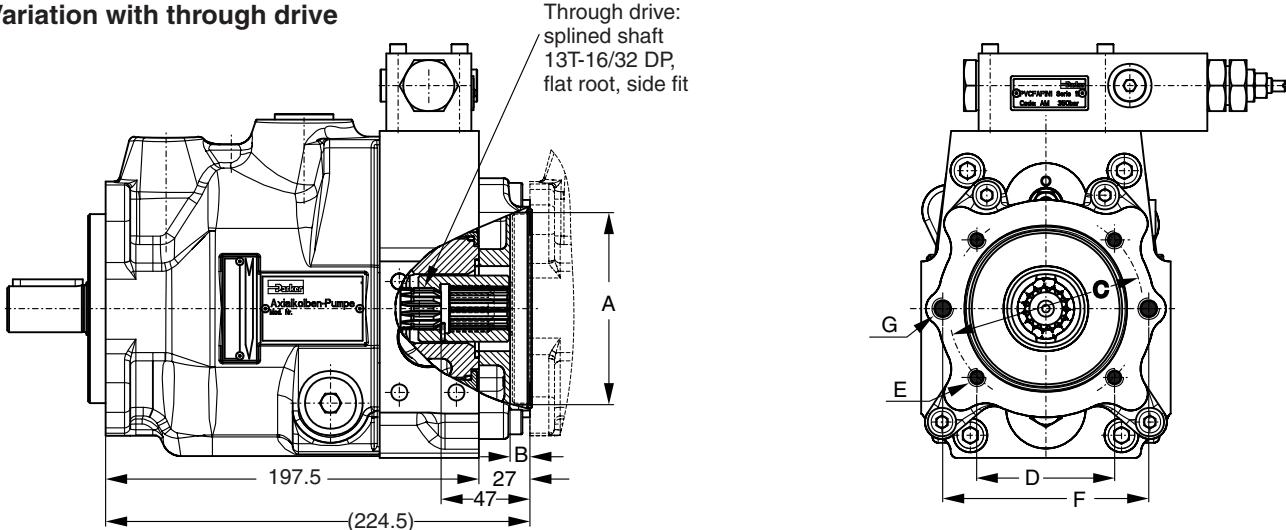

**Through drive adaptors are available with the following dimensions**


| Drawing Dimension    | A     | B    | C   | D    | E    |          | F   | G    |         | Remark       |
|----------------------|-------|------|-----|------|------|----------|-----|------|---------|--------------|
|                      |       |      |     |      | Metr | UNC      |     | Metr | UNC     |              |
| Through drive option |       |      |     |      |      |          |     |      |         |              |
| A                    | 82.55 | 8    | -   | -    | -    | -        | 106 | M10  | 3/8"-16 | SAE A 2-Bolt |
| B                    | 101.6 | 10.5 | 127 | 89.8 | M12  | 1/2"-13  | -   | -    | -       | SAE B 4-Bolt |
| H                    | 80    | 8.5  | 103 | 72.8 | M8   | 5/16"-18 | 109 | M10  | 3/8"-16 | 2/4-Bolt     |
| J                    | 100   | 10.5 | 125 | 88.4 | M10  | 3/8"-16  | -   | -    | -       | 4-Bolt       |

PV032 - 046, metric version

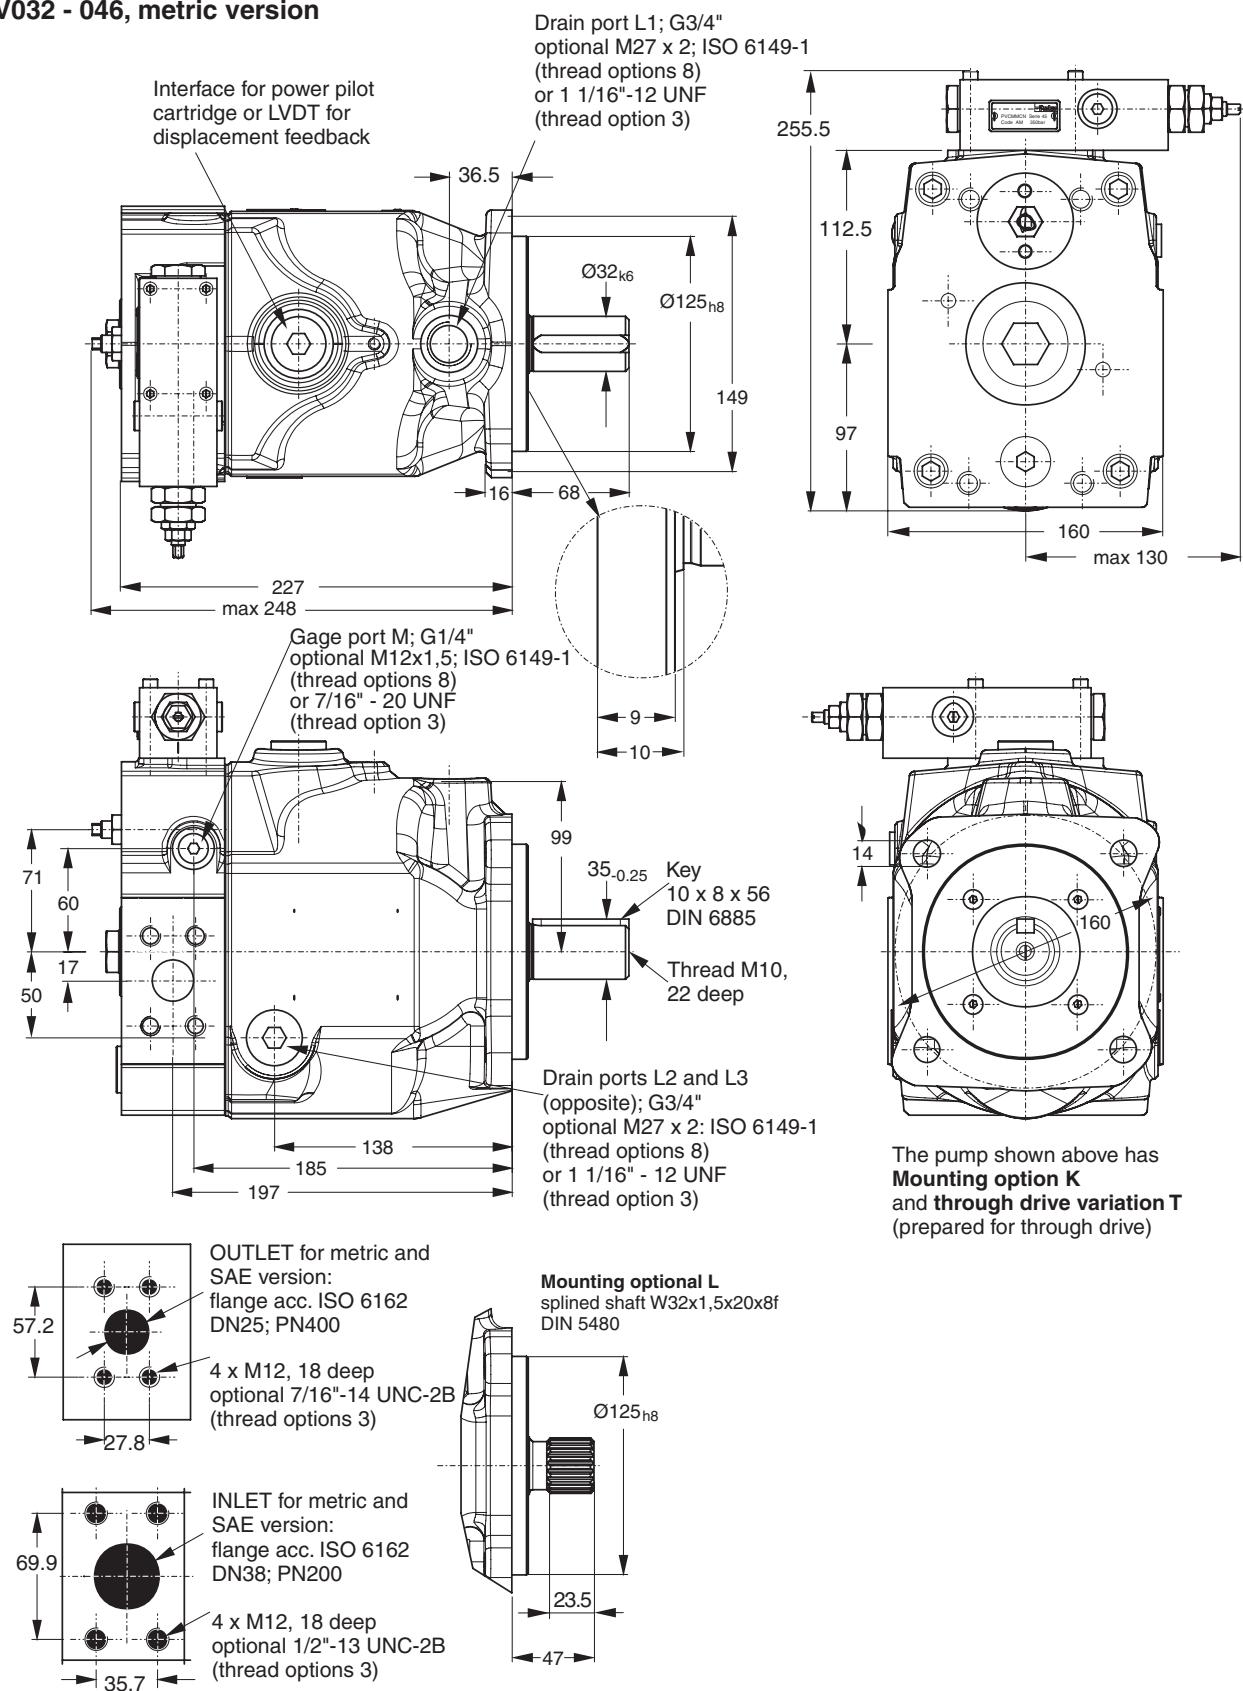


Shown is a clockwise rotating pump with standard pressure compensator. Counter clockwise rotating pumps have inlet, outlet and gage port reversed.

**PV032 - 046, SAE version**

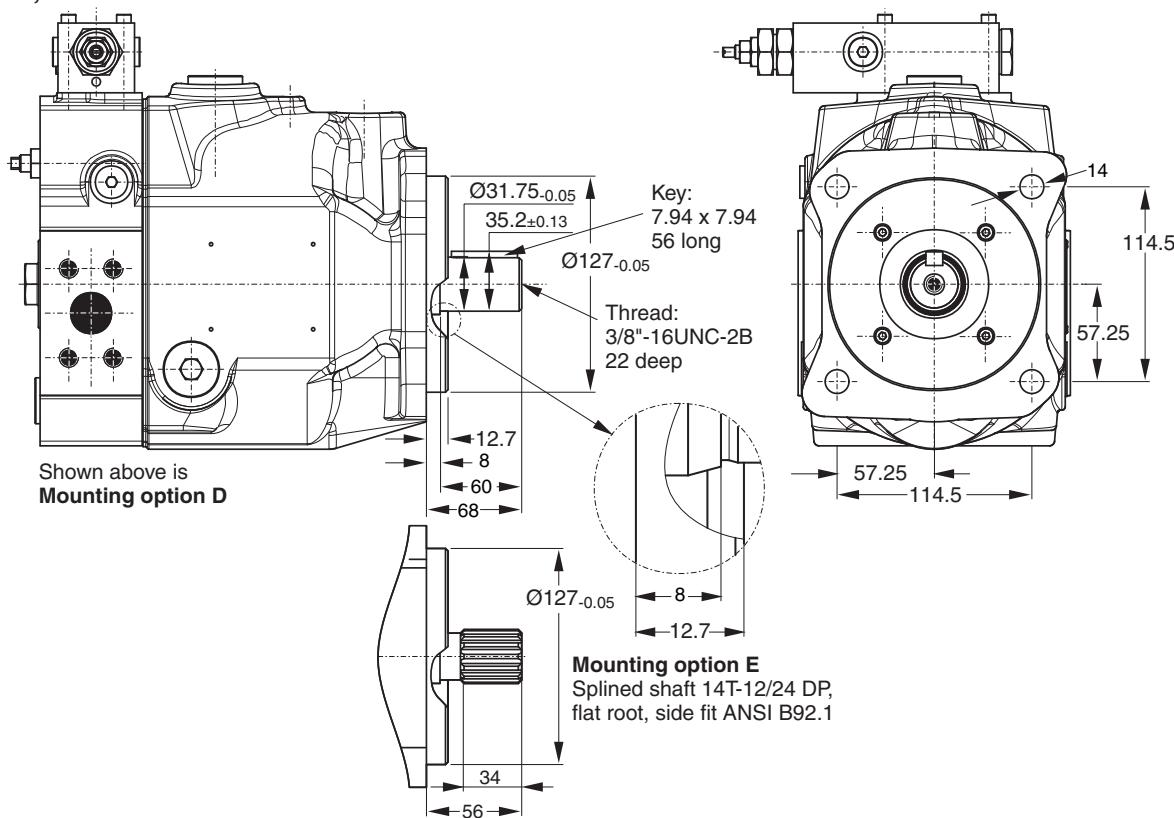

**Variation with through drive**




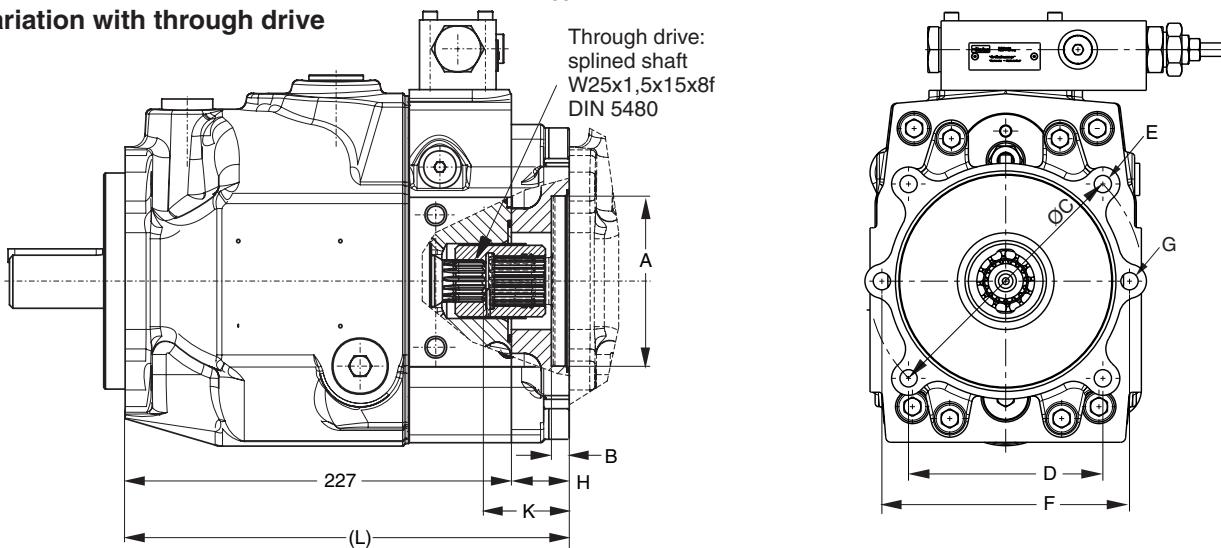


At threads options 3 and 7 the dimensions E and G are UNC - 2B threads.




| Through drive adaptors are available with the following dimensions |       |      |     |       |      |          |     |      |         |    |    |     |                |
|--|-------|------|-----|-------|------|----------|-----|------|---------|----|----|-----|----------------|
| Drawing Dimension  | A     | B    | C   | D     | E    |          | F   | G    |         | H  | K  | L   | Remark         |
|  |       |      |     |       | Metr | UNC      |     | Metr | UNC     |    |    |     |                |
| Through drive option   |       |      |     |       |      |          |     |      |         |    |    |     |                |
| A  | 82.55 | 8    | -   | -     | -    | -        | 106 | M10  | 3/8"-16 | 34 | 48 | 261 | SAE A 2-Bolt   |
| B  | 101.6 | 11   | 127 | 89.8  | M12  | 1/2"-13  | 146 | M12  | 1/2"-13 | 34 | 48 | 261 | SAE B 2/4-Bolt |
| C  | 127   | 13.5 | 162 | 114.6 | M12  | 1/2"-13  | -   | -    | -       | 49 | 63 | 276 | SAE C 4-Bolt   |
| H  | 80    | 8.5  | 103 | 72.8  | M8   | 5/16"-18 | 109 | M10  | 3/8"-16 | 34 | 48 | 261 | 2/4-Bolt       |
| J  | 100   | 10.5 | 125 | 88.4  | M10  | 3/8"-16  | 140 | M12  | 1/2"-13 | 34 | 48 | 261 | 2/4-Bolt       |
| K  | 125   | 10.5 | 160 | 113.1 | M12  | 1/2"-13  | -   | -    | -       | 34 | 48 | 261 | 4-Bolt         |

**PV 063 - 092 Metric**

Mounting interface for  
horse power pilot or LVDT  
for displacement feedback

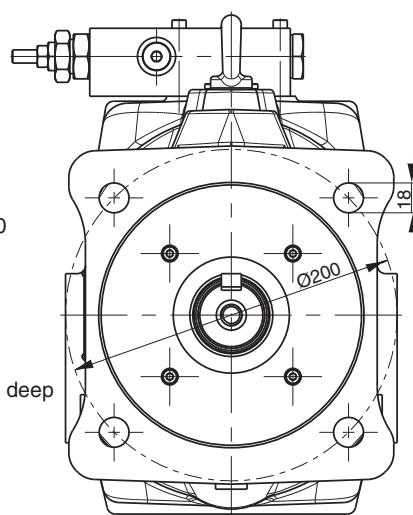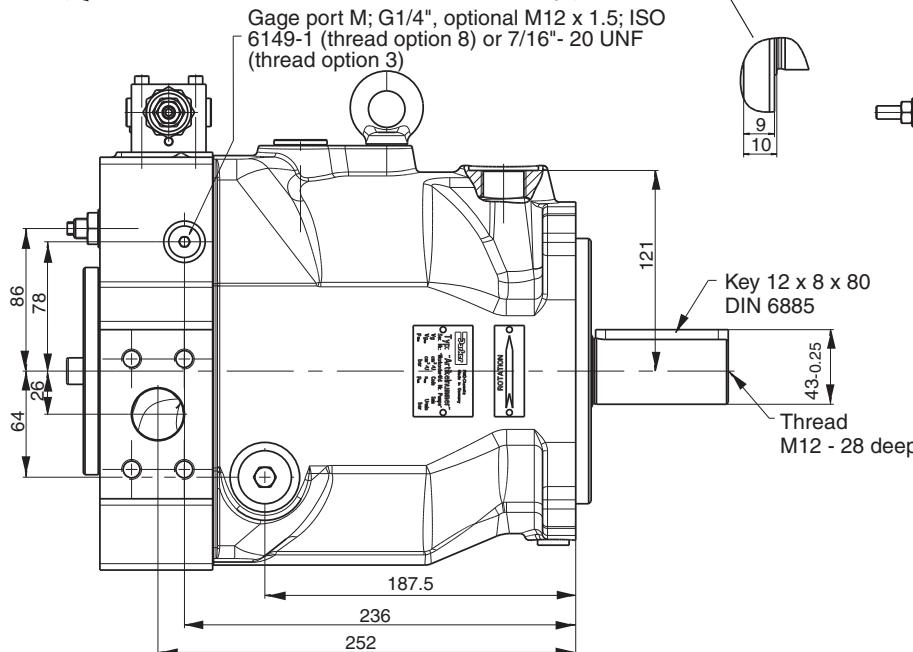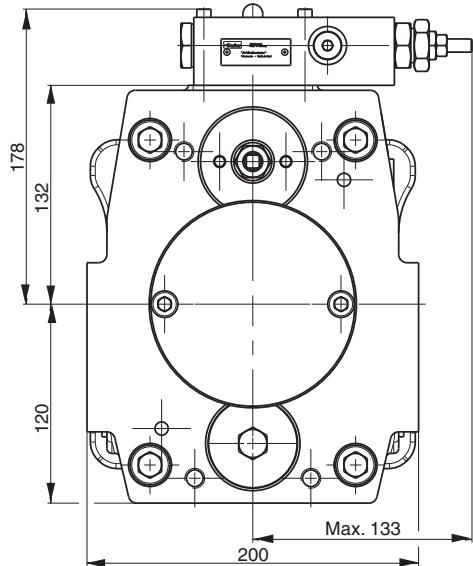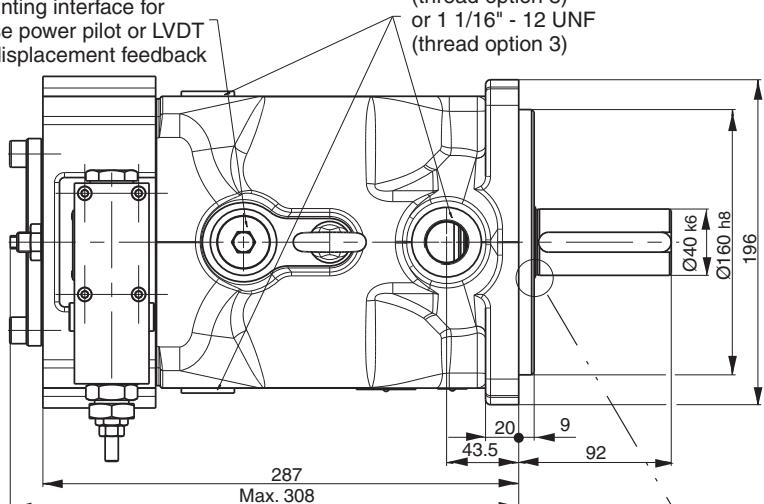


The pump shown above has  
**Mounting option K**  
and **through drive variation T**  
(prepared for through drive)

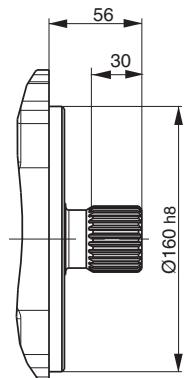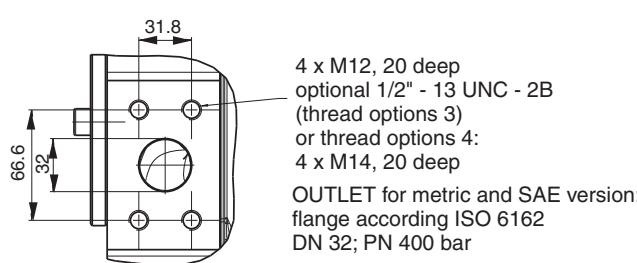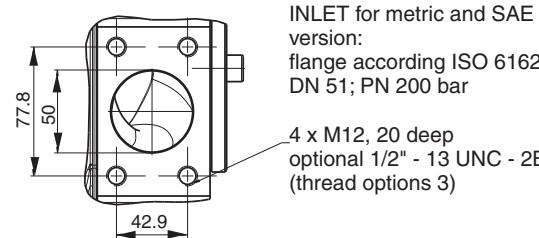


**Mounting option L**, splined shaft  
W40 x 1.5 x 25 x 8f DIN 5480

Shown is a clockwise rotating pump with standard  
pressure compensator.  
Counter clockwise rotating pumps have inlet, outlet and  
gage port reversed.

**PV 063 - 092 SAE Version**

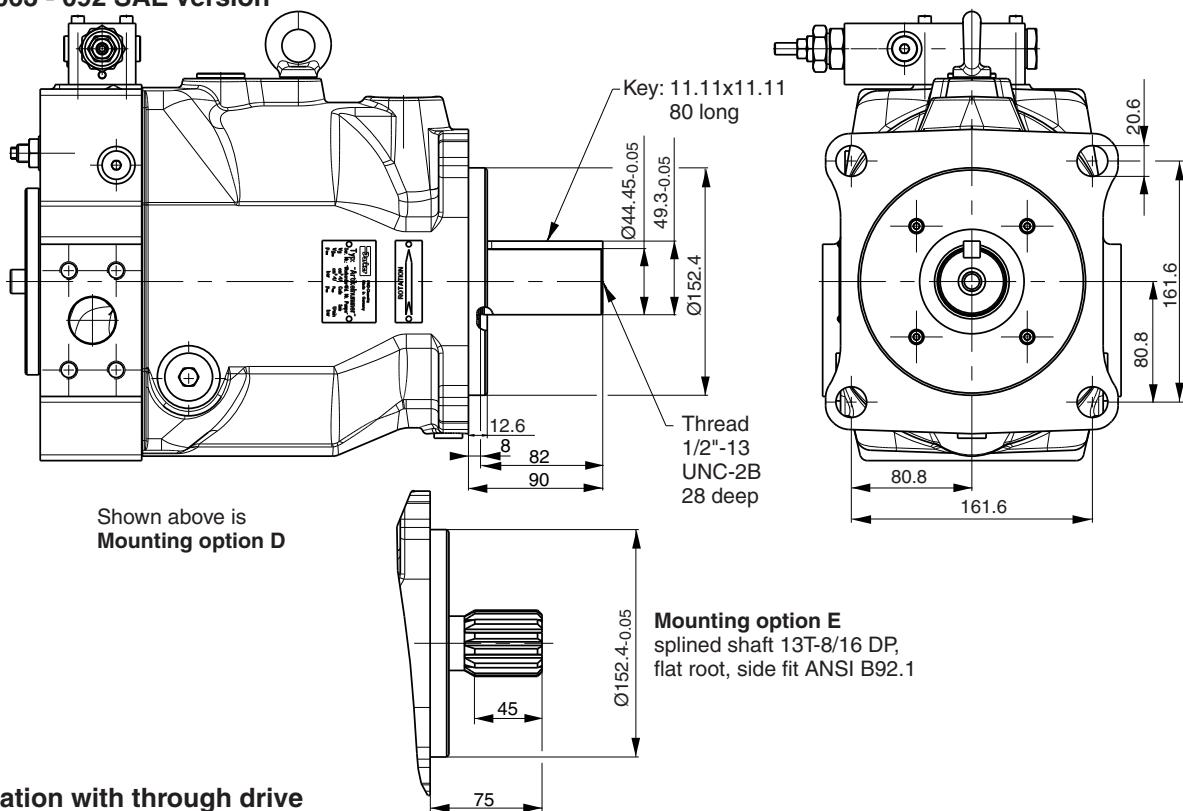

**Variation with through drive**

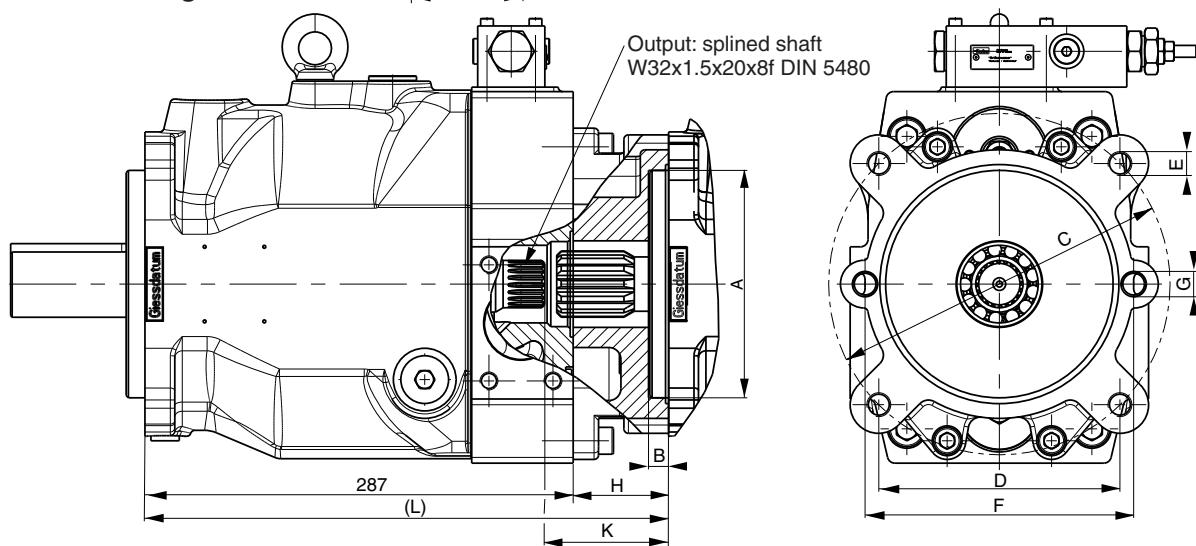




**Through drive adaptors are available with the following dimensions**

| Drawing Dimension<br>Through drive option | A     | B    | C     | D     | E    |          | F   | G    |         | H  | K  | L   | Remark         |
|---|-------|------|-------|-------|------|----------|-----|------|---------|----|----|-----|----------------|
|   |       |      |       |       | Metr | UNC      |     | Metr | UNC     |    |    |     |                |
|   |       |      |       |       |      |          |     |      |         |    |    |     |                |
| A   | 82.55 | 8    | -     | -     | -    | -        | 106 | M10  | 3/8"-16 | 39 | 58 | 326 | SAE A 2-Bolt   |
| B   | 101.6 | 11   | 127   | 89.8  | M12  | 1/2"-13  | 146 | M12  | 1/2"-13 | 39 | 58 | 326 | SAE B 2/4-Bolt |
| C   | 127   | 13.5 | 162   | 114.6 | M12  | 1/2"-13  | 181 | M16  | 5/8"-11 | 39 | 58 | 326 | SAE C 2/4-Bolt |
| D   | 152.4 | 13.5 | 228.5 | 161.6 | M16  | 5/8"-11  | -   | -    | -       | 64 | 83 | 351 | SAE D 4-Bolt   |
| H   | 80    | 8.5  | 103   | 72.8  | M8   | 5/16"-18 | 109 | M10  | 3/8"-16 | 39 | 58 | 326 | 2/4-Bolt       |
| J   | 100   | 10.5 | 125   | 88.4  | M10  | 3/8"-16  | 140 | M12  | 1/2"-13 | 39 | 58 | 326 | 2/4-Bolt       |
| K   | 125   | 10.5 | 160   | 113.1 | M12  | 1/2"-13  | 180 | M16  | 5/8"-11 | 39 | 58 | 326 | 2/4-Bolt       |
| L   | 160   | 13.5 | 200   | 141.4 | M16  | 5/8"-11  | -   | -    | -       | 39 | 58 | 326 | 4-Bolt         |


**PV 140 - 180 Metric**

Mounting interface for  
 horse power pilot or LVDT for displacement  
 feedback

Drain ports L2; G1"  
 optional M33 x 2; ISO 6149-1  
 (thread option 8)  
 or 1 5/16" - 12 UNF  
 (thread option 3)

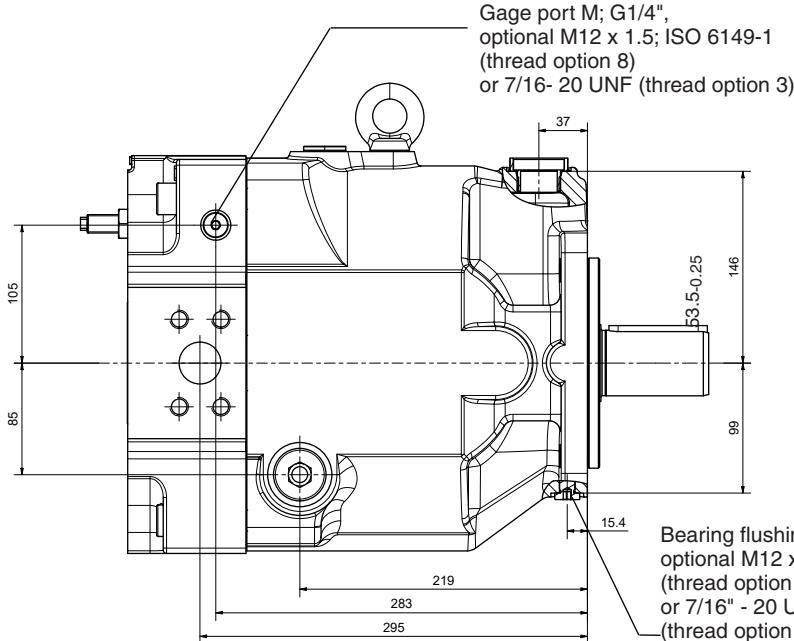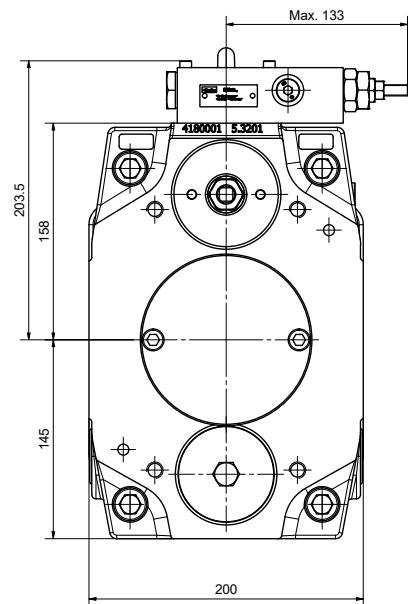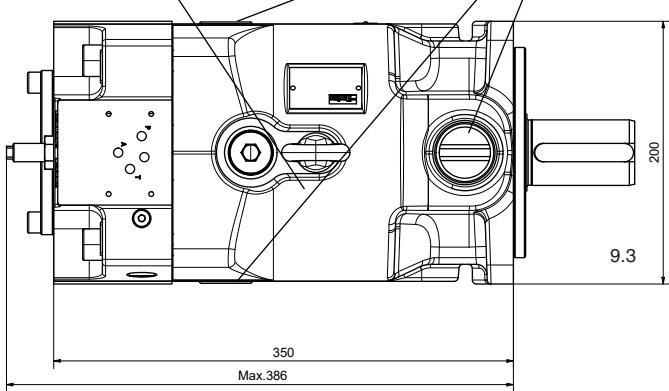


Bearing flushing port L4; G1/4",  
 optional M12 x 1.5; ISO 6149-1  
 (thread option 8)  
 or 7/16" - 20 UNF  
 (thread option 3)

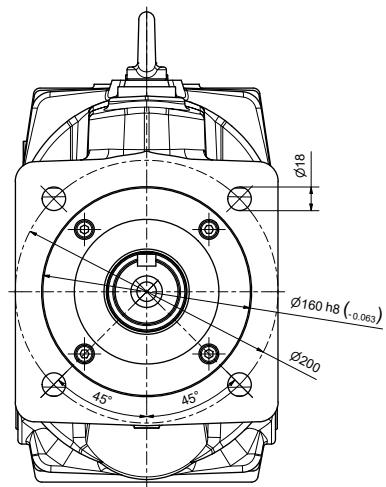

Flange according DIN ISO 3019-2 Metric  
 for mounting interface code K and L

**INLET for metric and SAE**


version:  
 flange according ISO 6162  
 DN 89; PN 160 bar

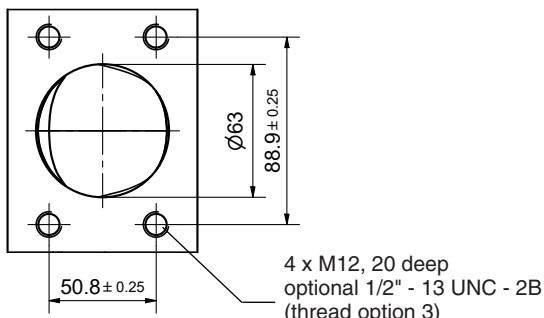

4 x M12, 20 deep  
 optional 1/2" - 13 UNC - 2B  
 (thread option 3)

**OUTLET for metric and SAE**

version:  
 flange according ISO 6162  
 DN 32; PN 400 bar


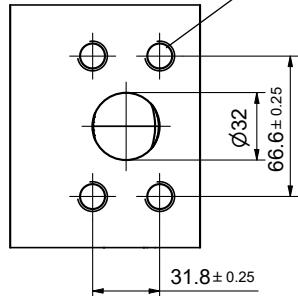


4 x M12, 20 deep  
 optional 1/2" - 13 UNC - 2B  
 (thread option 3)  
 or  
 4 x M14, 22 deep  
 (thread option 4)



## PV 140 - 180 SAE Version

Flange according DIN ISO 3019-1 SAE  
for mounting interface code D, E, F and G

Shown are clockwise rotating pumps. Counter clockwise  
rotating pumps have inlet, outlet and gage port reversed.

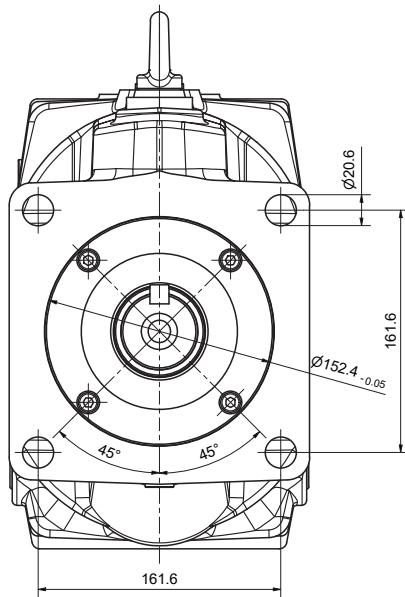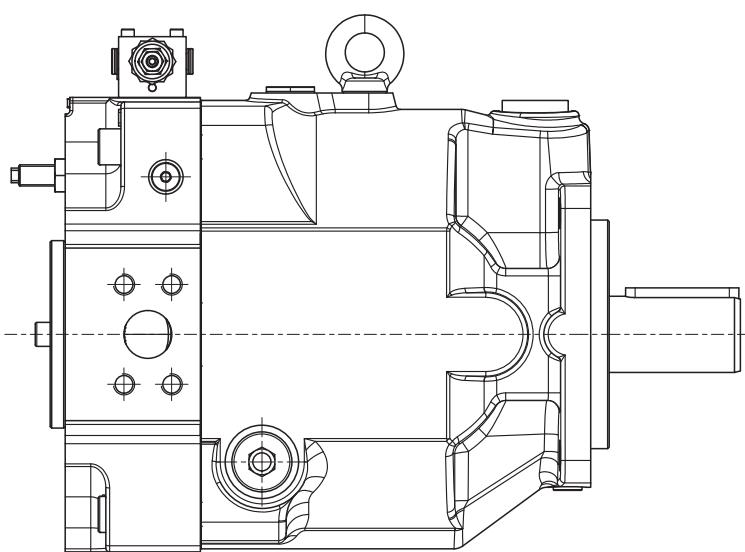







## Variation with through drive

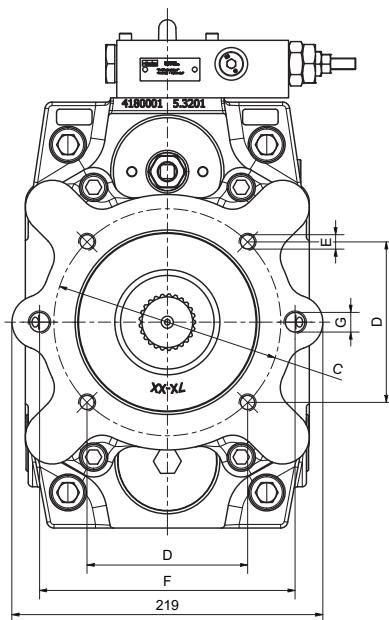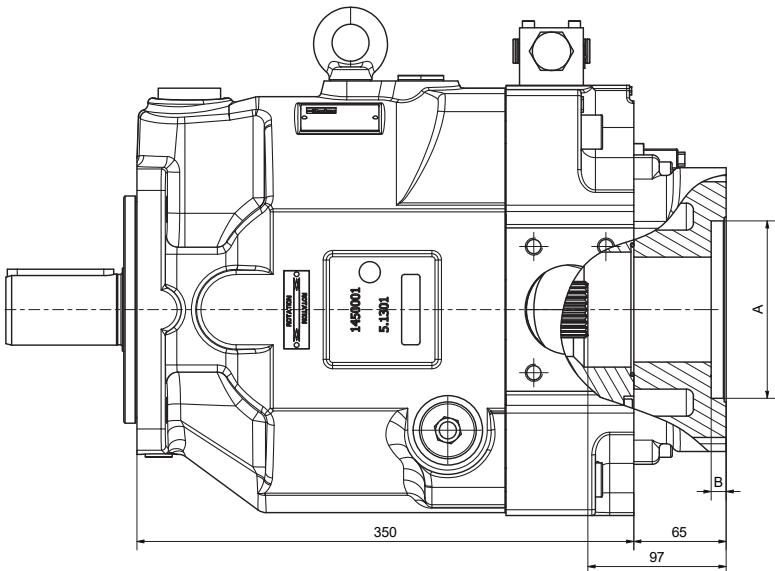




## Through drive adaptors are available with the following dimensions

| Drawing Dimension    | A     | B    | C     | D     | E    |          | F   | G    |         | Remark         |
|----------------------|-------|------|-------|-------|------|----------|-----|------|---------|----------------|
|                      |       |      |       |       | Metr | UNC      |     | Metr | UNC     |                |
| Through drive option |       |      |       |       |      |          |     |      |         |                |
| A                    | 82.55 | 8    | -     | -     | -    | -        | 106 | M10  | 3/8"-16 | SAE A 2-Bolt   |
| B                    | 101.6 | 11   | 127   | 89.8  | M12  | 1/2"-13  | 146 | M12  | 1/2"-13 | SAE B 2/4-Bolt |
| C                    | 127   | 13.5 | 162   | 114.6 | M12  | 1/2"-13  | 181 | M16  | 5/8"-11 | SAE C 2/4-Bolt |
| D                    | 152.4 | 13.5 | 228.5 | 161.6 | M16  | 5/8"-11  | -   | -    | -       | SAE D 4-Bolt   |
| H                    | 80    | 8.5  | 103   | 72.8  | M8   | 5/16"-18 | 109 | M10  | 3/8"-16 | 2/4-Bolt       |
| J                    | 100   | 10.5 | 125   | 88.4  | M10  | 3/8"-16  | 140 | M12  | 1/2"-13 | 2/4-Bolt       |
| K                    | 125   | 10.5 | 160   | 113.1 | M12  | 1/2"-13  | 180 | M16  | 5/8"-11 | 2/4-Bolt       |
| L                    | 160   | 13.5 | 200   | 141.4 | M16  | 5/8"-11  | -   | -    | -       | 4-Bolt         |

## PV 140 - 180 Mounting options

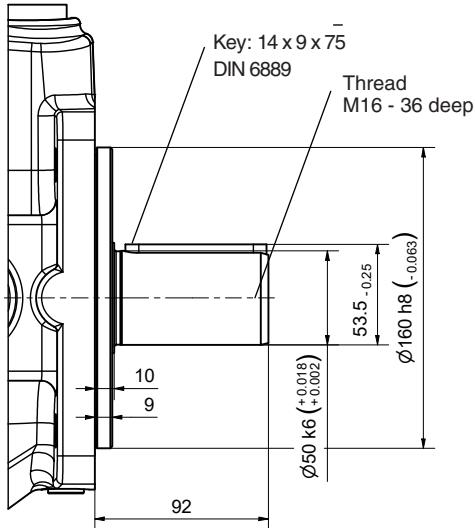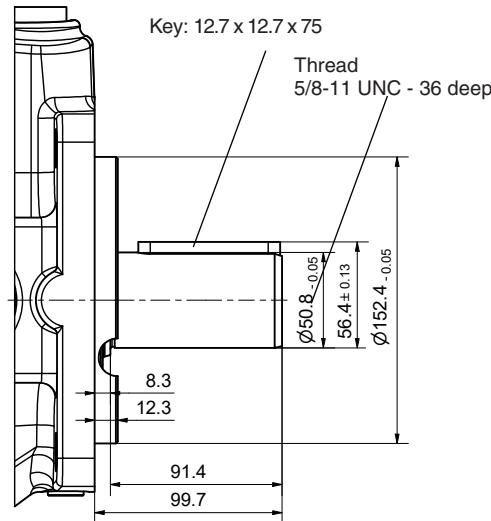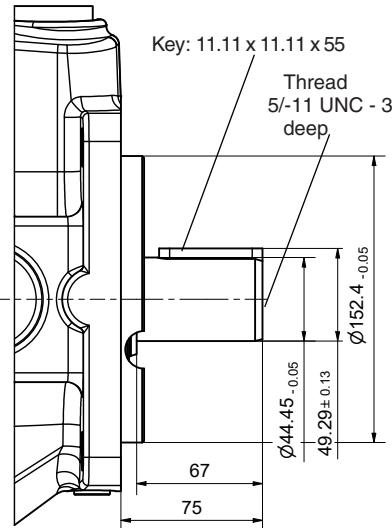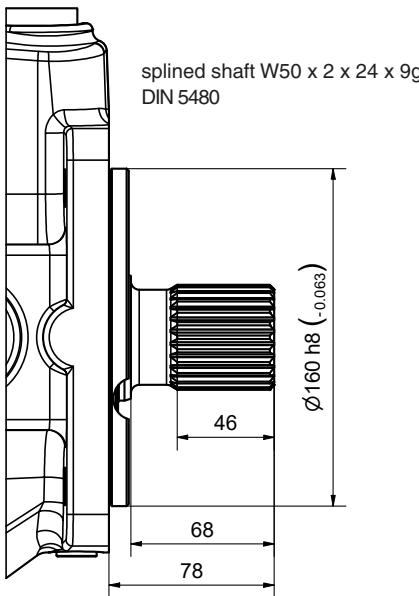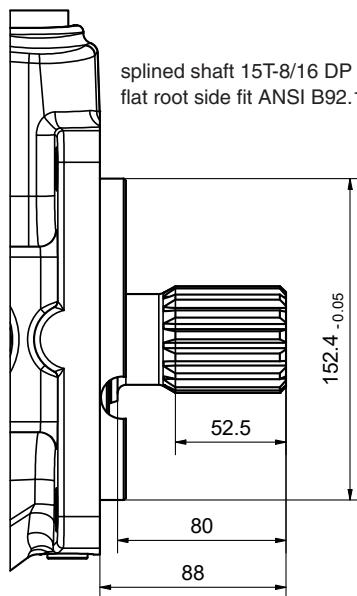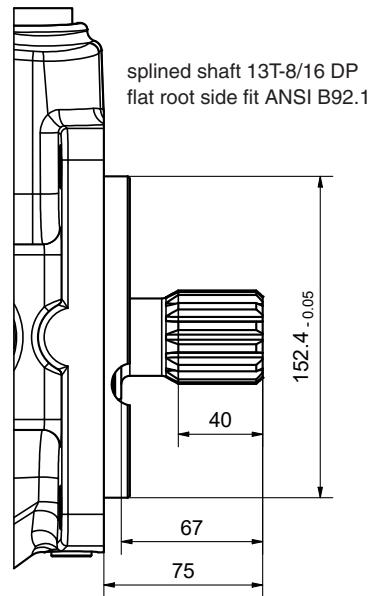
Mounting option K  
shaft keyed metricMounting option D  
shaft keyed SAEMounting option F  
shaft keyed SAEMounting option L  
shaft splined metricMounting option E  
shaft splined SAEMounting option G  
shaft splined SAE

**PV 270 Metric**

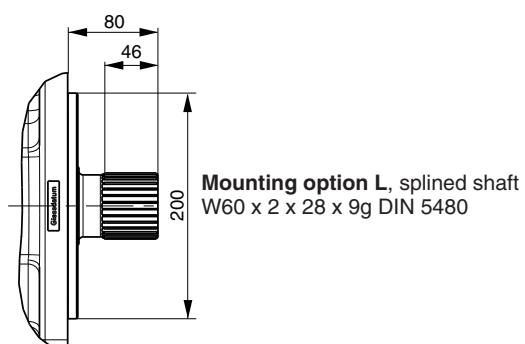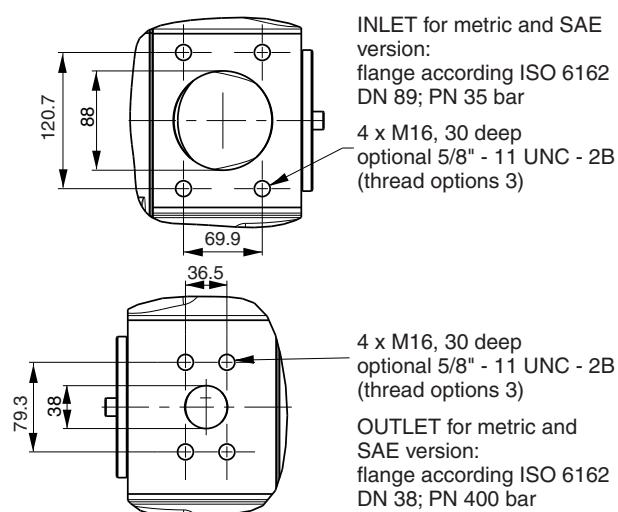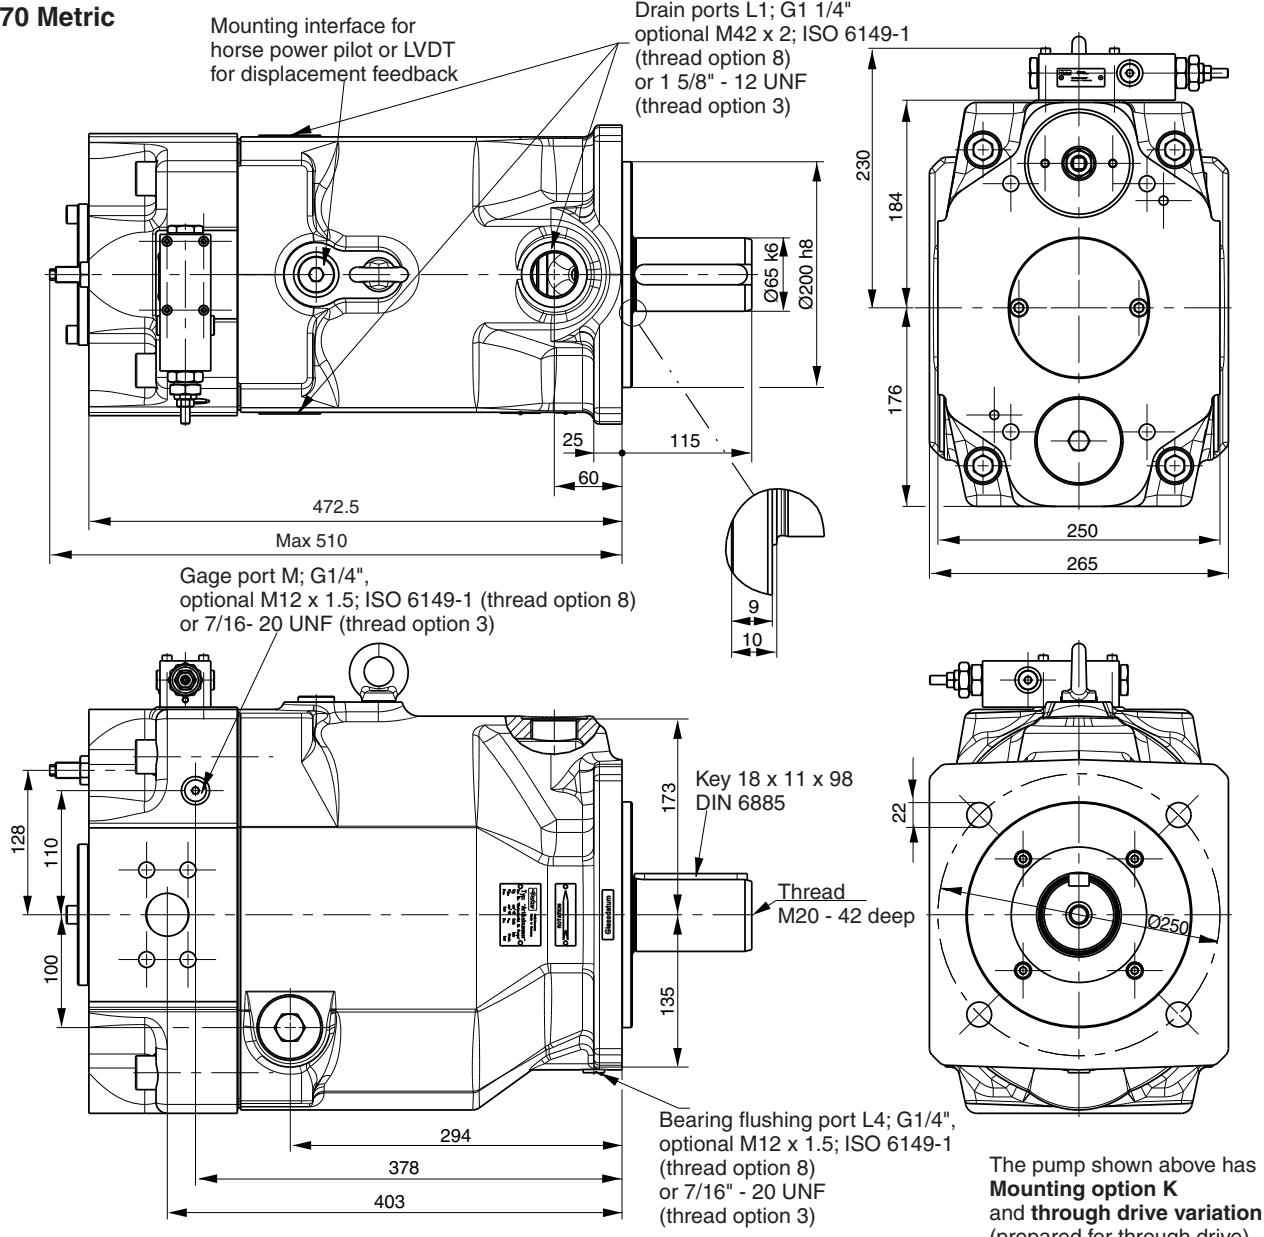


Shown is a clockwise rotating pump with standard pressure control. Counter clockwise rotating pump have inlet, outlet and gage port reversed.

**PV 270 SAE Version**

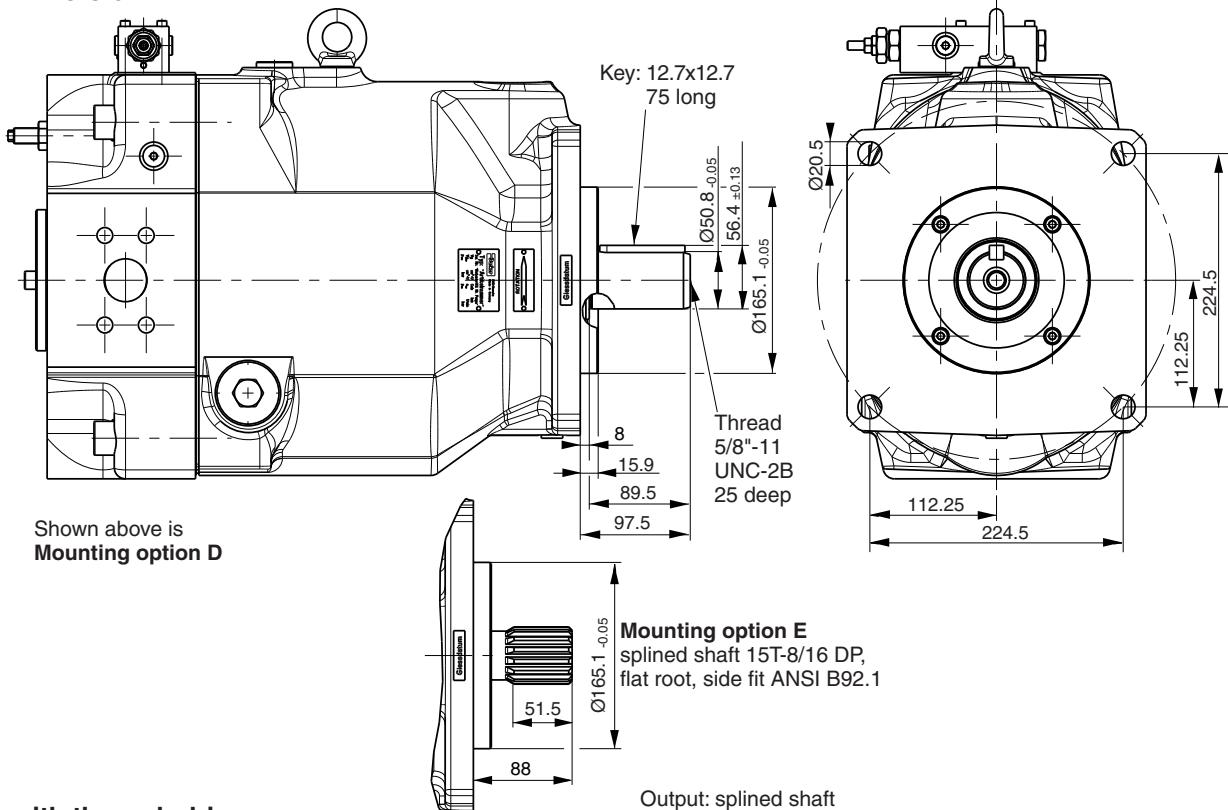


**Variation with through drive**

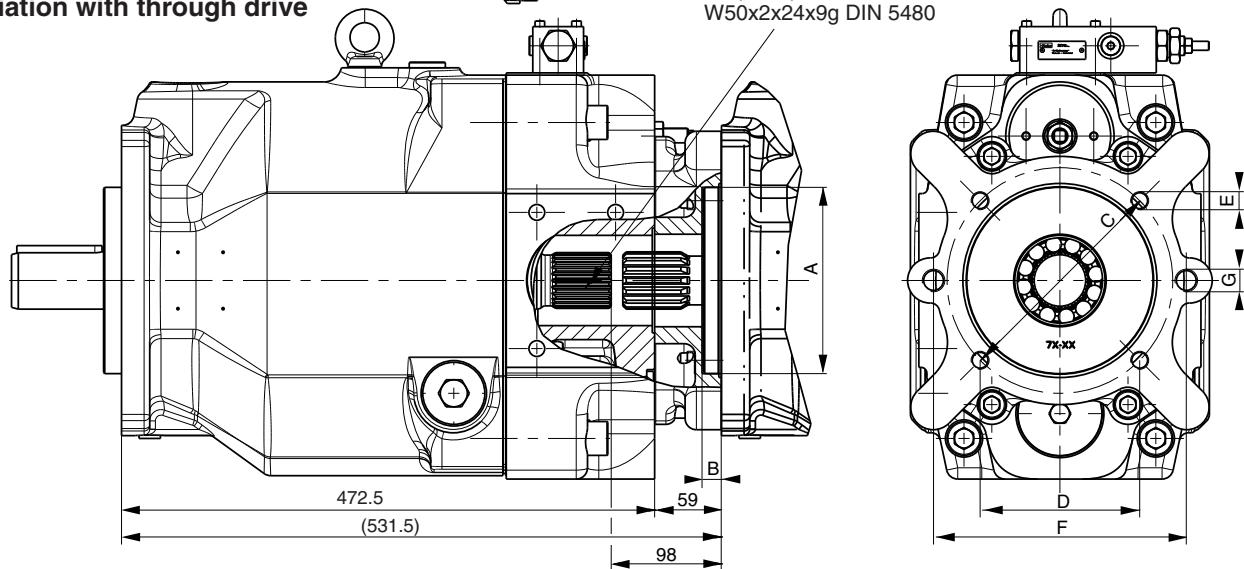

**Through drive adaptors are available with the following dimensions**


| Drawing Dimension<br>Through drive option | A     | B    | C     | D     | E   |          | F   | G    |         | Remark         |
|---|-------|------|-------|-------|-----|----------|-----|------|---------|----------------|
|   | Metr  | UNC  | Metr  | UNC   |     |          |     | Metr | UNC     |                |
| A   | 82.55 | 8    | -     | -     | -   | -        | 106 | M10  | 3/8"-16 | SAE A 2-Bolt   |
| B   | 101.6 | 11   | 127   | 89.8  | M12 | 1/2"-13  | 146 | M12  | 1/2"-13 | SAE B 2/4-Bolt |
| C   | 127   | 13.5 | 162   | 114.6 | M12 | 1/2"-13  | 181 | M16  | 5/8"-11 | SAE C 2/4-Bolt |
| D   | 152.4 | 13.5 | 228.5 | 161.6 | M16 | 5/8"-11  | 229 | M16  | 5/8"-11 | SAE D 2/4-Bolt |
| E   | 165.1 | 17   | 317.5 | 224.5 | M20 | 3/4"-10  | -   | -    | -       | SAE E 4-Bolt   |
| H   | 80    | 8.5  | 103   | 72.8  | M8  | 5/16"-18 | 109 | M10  | 3/8"-16 | 2/4-Bolt       |
| J   | 100   | 10.5 | 125   | 88.4  | M10 | 3/8"-16  | 140 | M12  | 1/2"-13 | 2/4-Bolt       |
| K   | 125   | 10.5 | 160   | 113.1 | M12 | 1/2"-13  | 180 | M16  | 5/8"-11 | 2/4-Bolt       |
| L   | 160   | 13.5 | 200   | 141.4 | M16 | 5/8"-11  | 224 | M20  | 3/4"-10 | 2/4-Bolt       |
| M   | 200   | 13.5 | 250   | 176.8 | M20 | 3/4"-10  | -   | -    | -       | 4-Bolt         |

**PV 360 Metric**

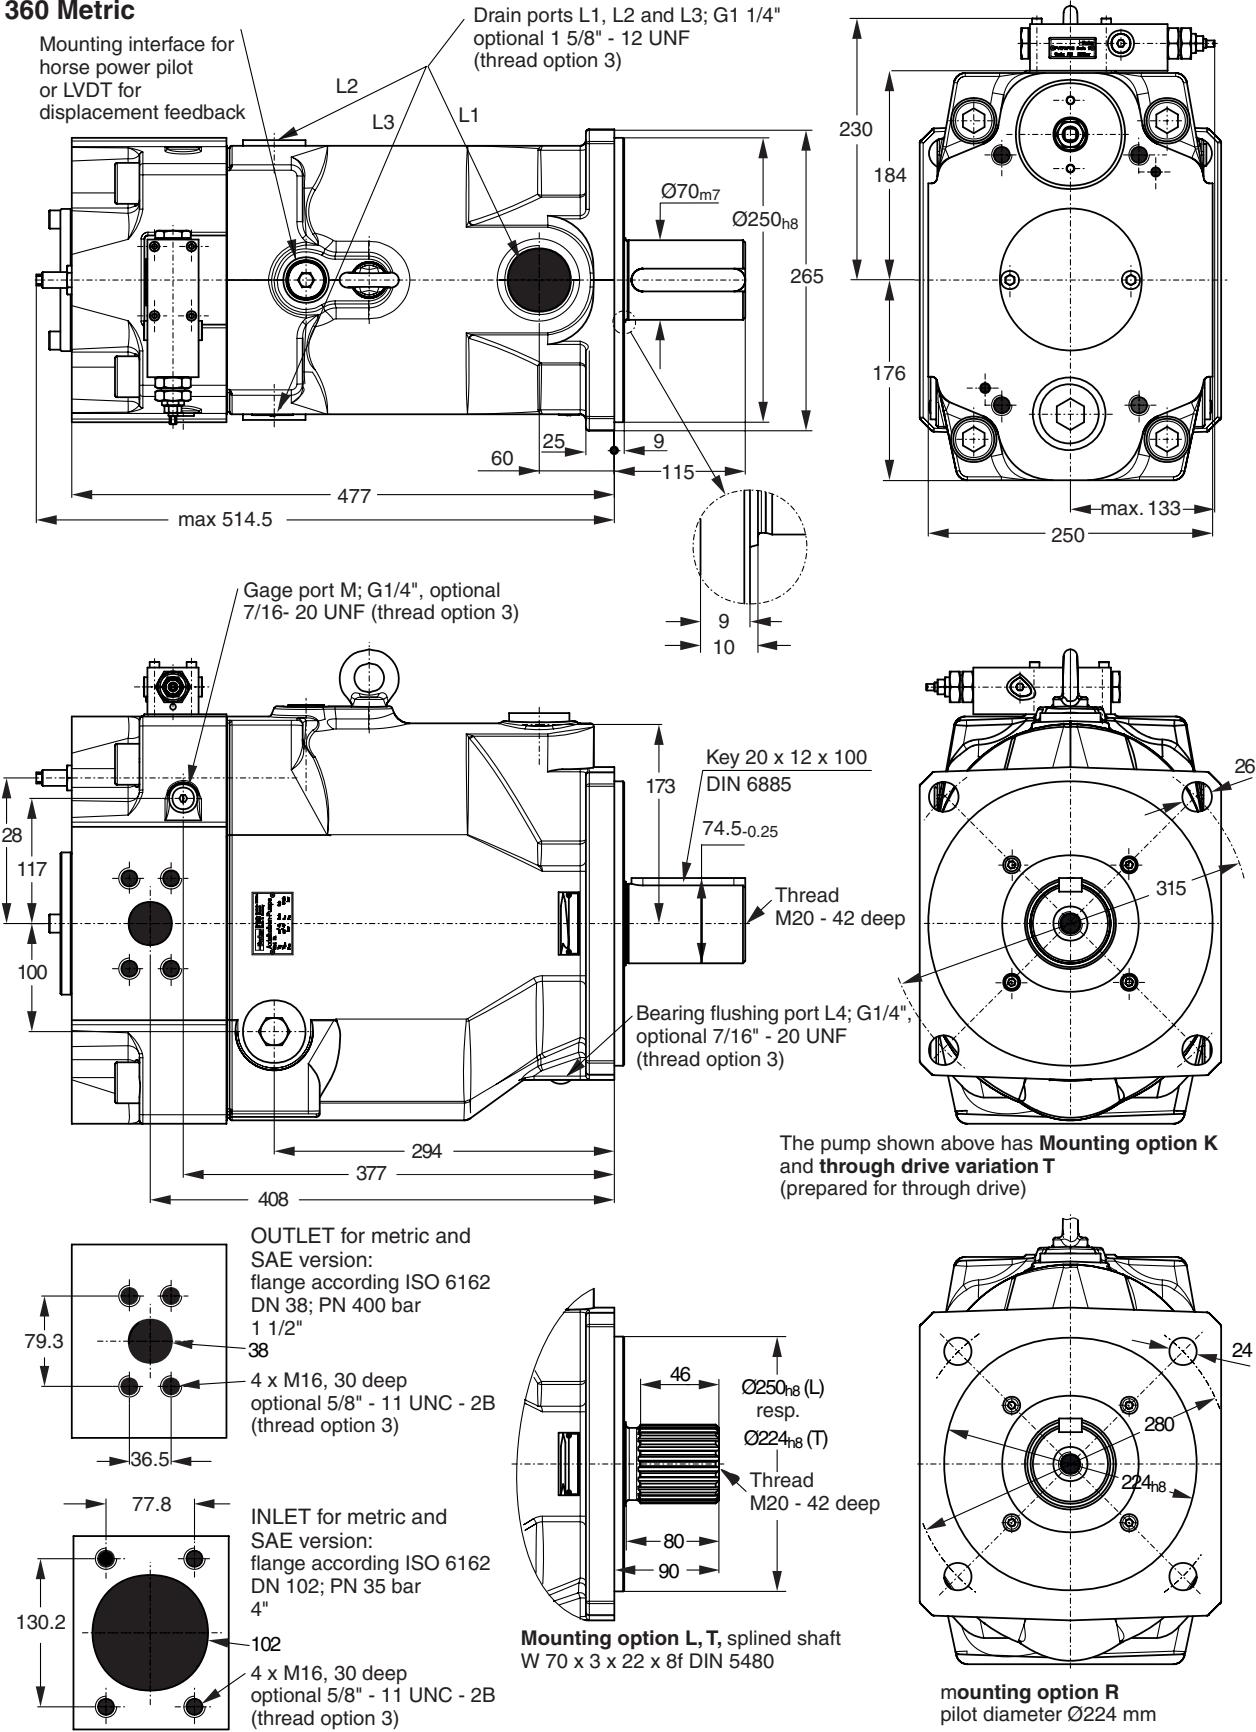


Shown is a clockwise rotating pump with standard pressure control.  
Counter clockwise rotating pump have inlet, outlet and gage port reversed.

**PV 360 SAE Version**

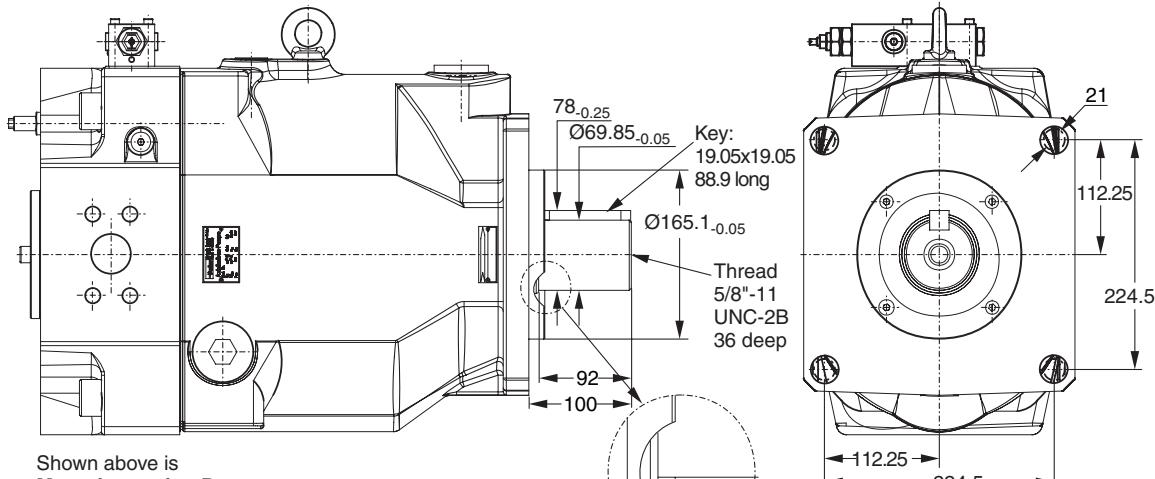


Shown above is  
**Mounting option D**

**Note:**  
 The dimensions shown conform to ISO 3019/1  
 the actual hole dimensions conform to ISO 3019/2  
 (pitch Ø315, hole Ø26, see previous page)  
 and cover ISO 3019/1 dimensions as well.  
 Use washers when assembling pump.

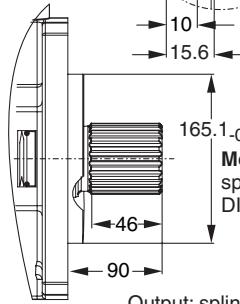

**Mounting option E**  
 splined shaft W 70x3x22x8f,  
 DIN 5480


**Variation with through drive**

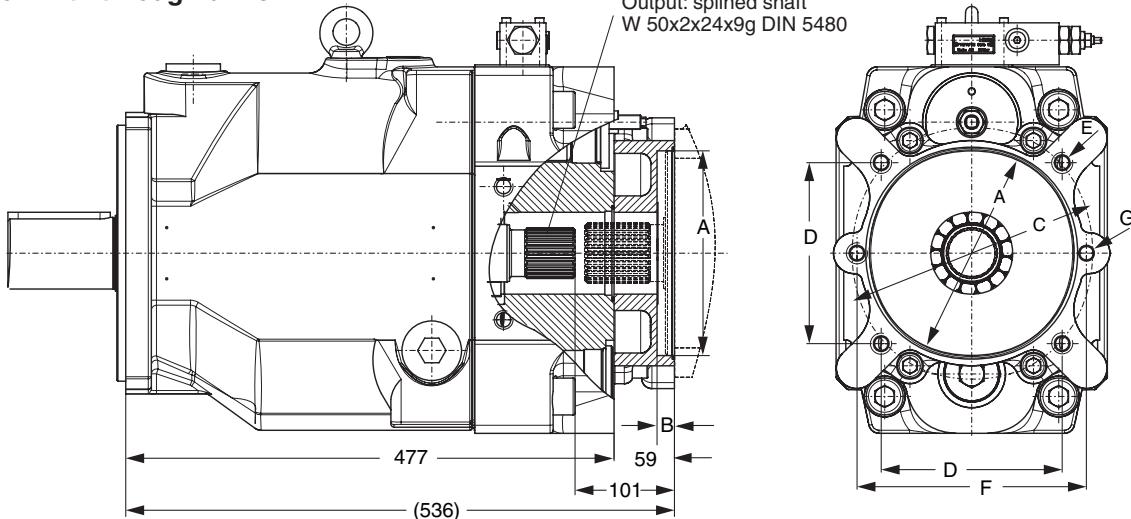

**Through drive adaptors are available with the following dimensions**


| Drawing Dimension<br>Through drive option | A     | B    | C     | D     | E    |          | F   | G    |         | Remark         |
|---|-------|------|-------|-------|------|----------|-----|------|---------|----------------|
|   |       |      |       |       | Metr | UNC      |     | Metr | UNC     |                |
| A   | 82.55 | 8    | -     | -     | -    | -        | 106 | M10  | 3/8"-16 | SAE A 2-Bolt   |
| B   | 101.6 | 11   | 127   | 89.8  | M12  | 1/2"-13  | 146 | M12  | 1/2"-13 | SAE B 2/4-Bolt |
| C   | 127   | 13.5 | 162   | 114.6 | M12  | 1/2"-13  | 181 | M16  | 5/8"-11 | SAE C 2/4-Bolt |
| D   | 152.4 | 13.5 | 228.5 | 161.6 | M16  | 5/8"-11  | 229 | M16  | 5/8"-11 | SAE D 2/4-Bolt |
| E   | 165.1 | 17   | 317.5 | 224.5 | M20  | 3/4"-10  | -   | -    | -       | SAE E 4-Bolt   |
| H   | 80    | 8.5  | 103   | 72.8  | M8   | 5/16"-18 | 109 | M10  | 3/8"-16 | 2/4-Bolt       |
| J   | 100   | 10.5 | 125   | 88.4  | M10  | 3/8"-16  | 140 | M12  | 1/2"-13 | 2/4-Bolt       |
| K   | 125   | 10.5 | 160   | 113.1 | M12  | 1/2"-13  | 180 | M16  | 5/8"-11 | 2/4-Bolt       |
| L   | 160   | 13.5 | 200   | 141.4 | M16  | 5/8"-11  | 224 | M20  | 3/4"-10 | 2/4-Bolt       |
| M   | 200   | 13.5 | 250   | 176.8 | M20  | 3/4"-10  | -   | -    | -       | 4-Bolt         |

**Dimensions standard pressure control, code ...MMC**

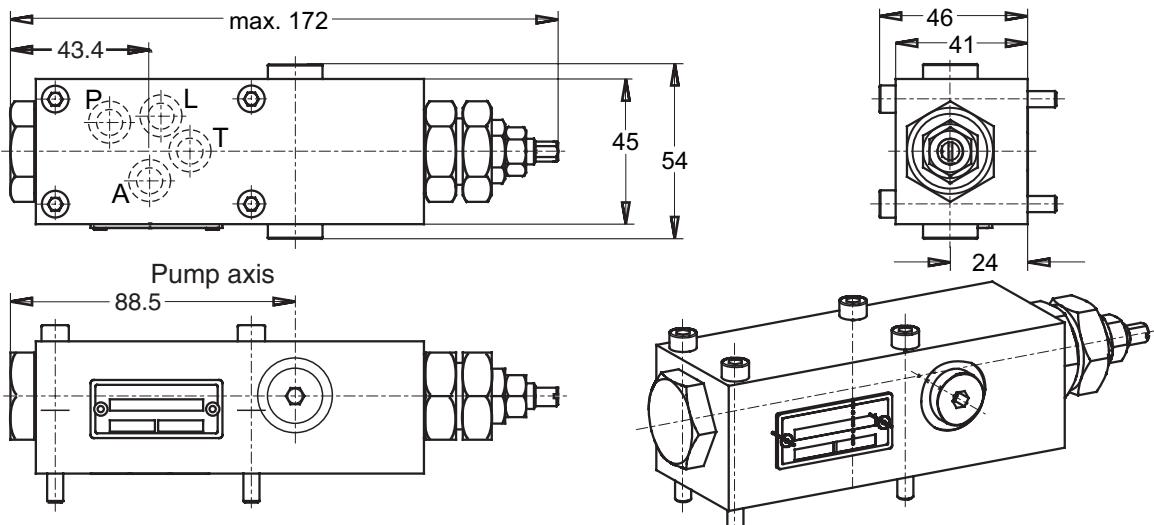


Controls with code ...MM1 have a NG6 / Cetop 3 interface topside (as shown below)

**Dimensions remote pressure and load sensing control, codes ...MR1, ...MF1**



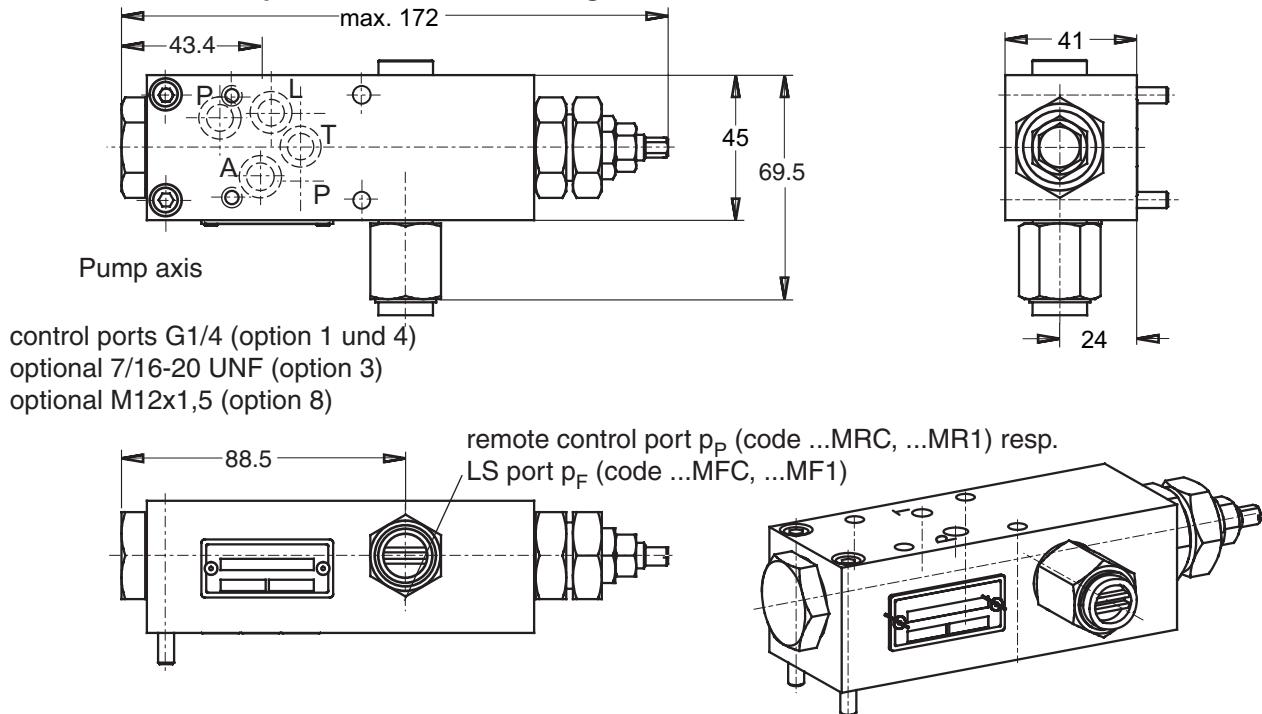


Controls with code ...MRC and MFC have no topside valve interface (as shown above)

**Dimensions horse power pilot cartridge, displacement sensor**

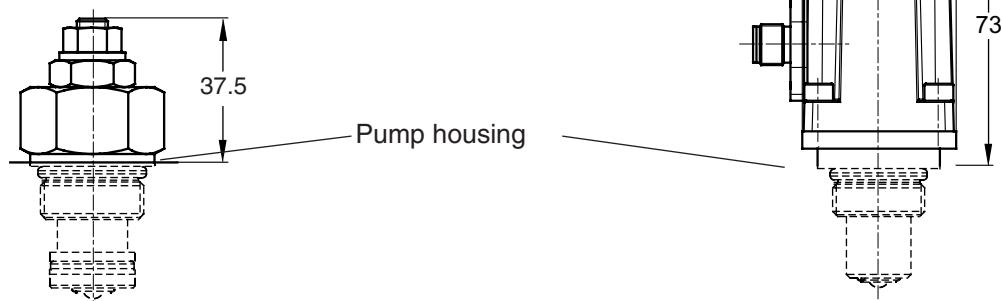


**Dimensions for controls with unloading valve, codes ...M\*W**

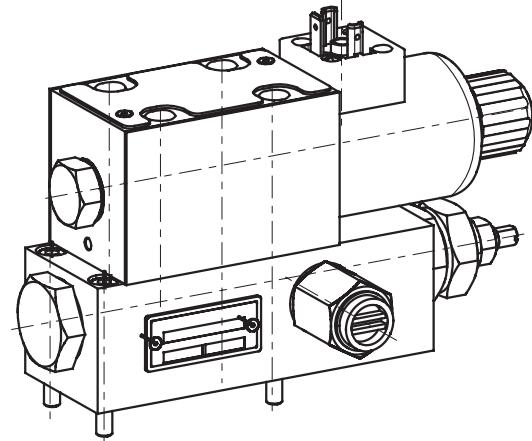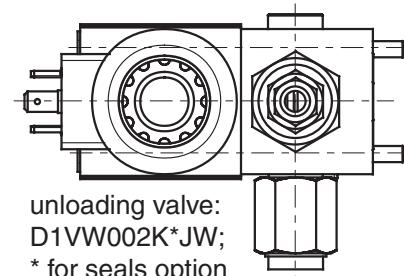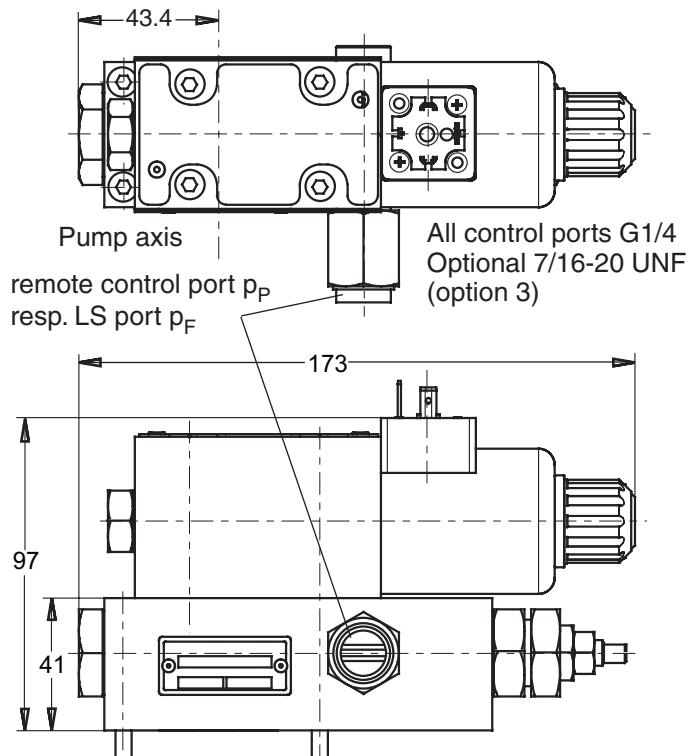


Shown in version MRW/MFW, version MMW has no remote control port.

**Dimensions for controls with proportional pressure pilot valve, codes ...M\*K**

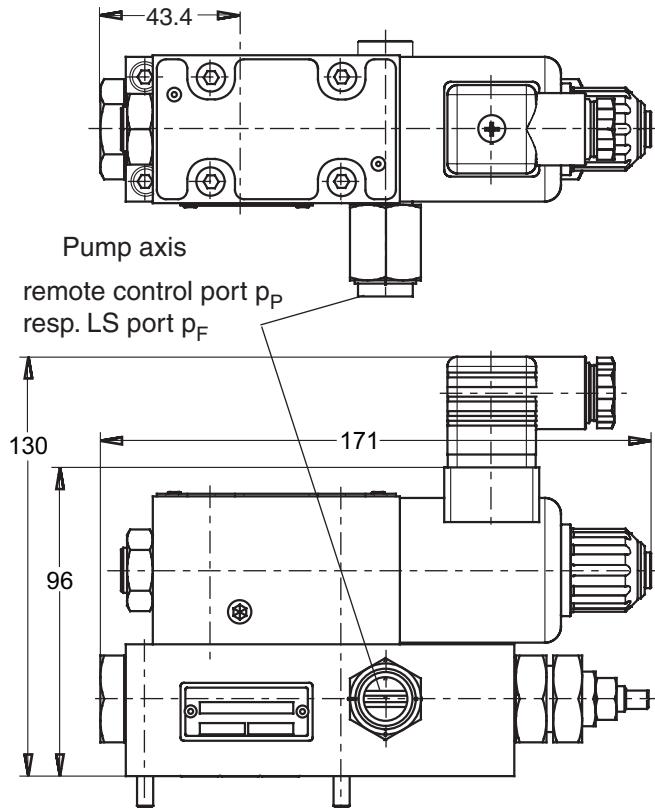


pilot valve:  
PVACREC...K35 for codes ...M\*K,  
\*\* for threads and seals option

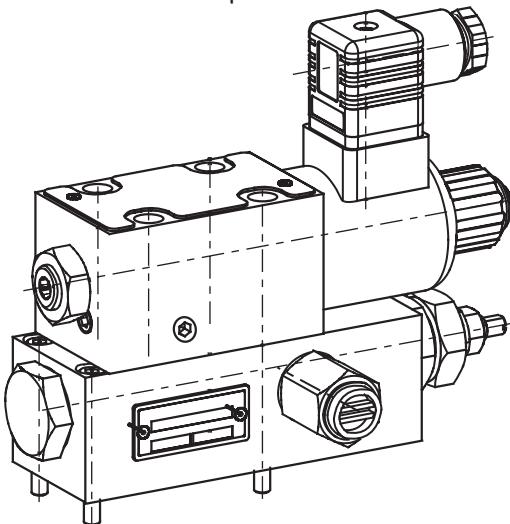


Shown in version MRK/MFK, version MMK has no remote control port.

Dimensions for horse power compensator \*L\* and \*C\* are identical to MM\* respectively MF\*.




**Dimensions two spool load sensing control, code ...MT1, ...MTP**

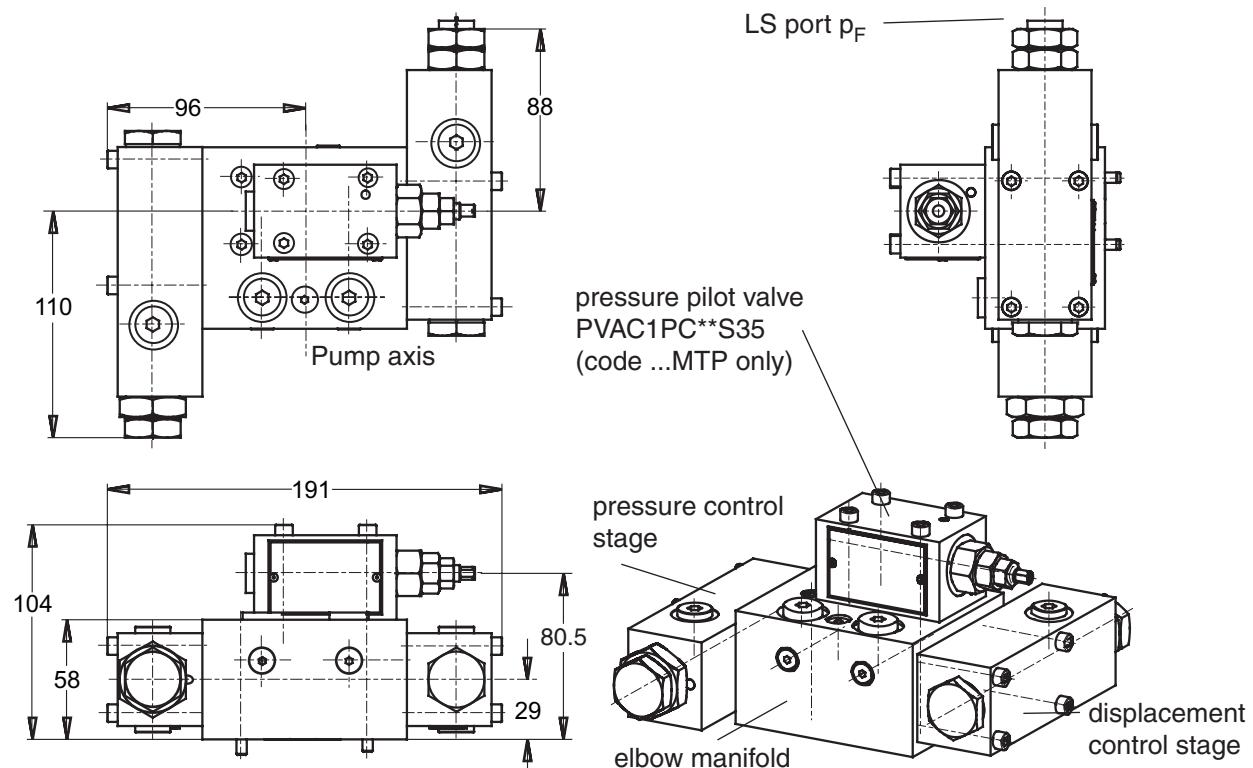


**Dimensions two spool load sensing control with proportional pressure pilot valve, code ...MTK**

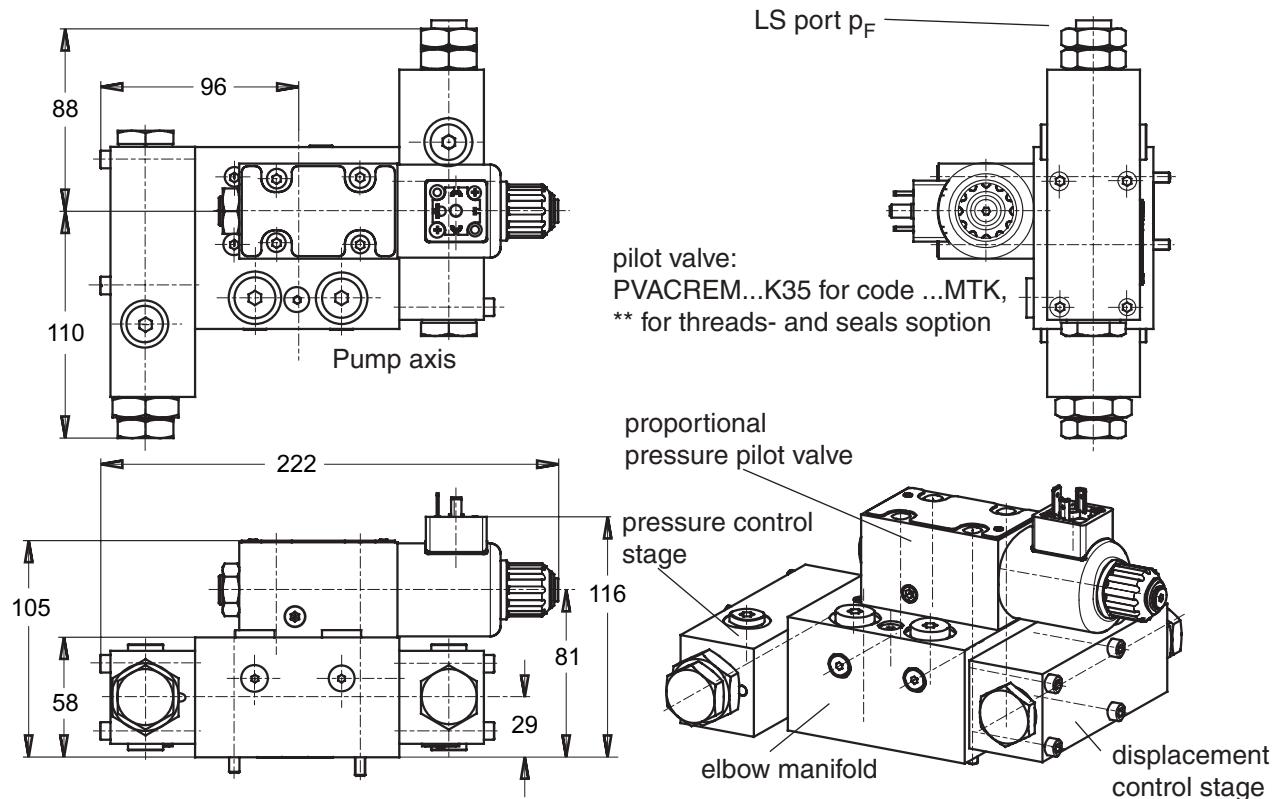




**Dimensions proportional displacement control, code ...FDV**

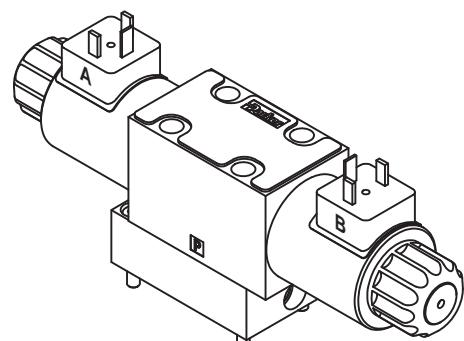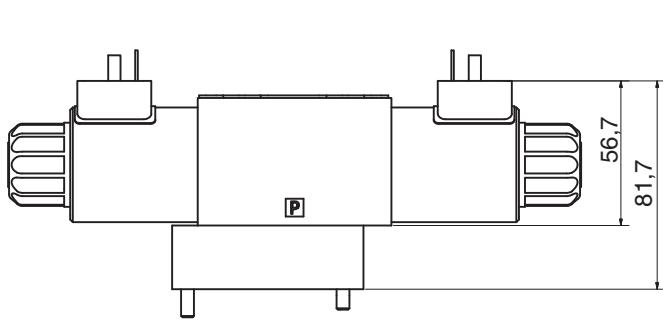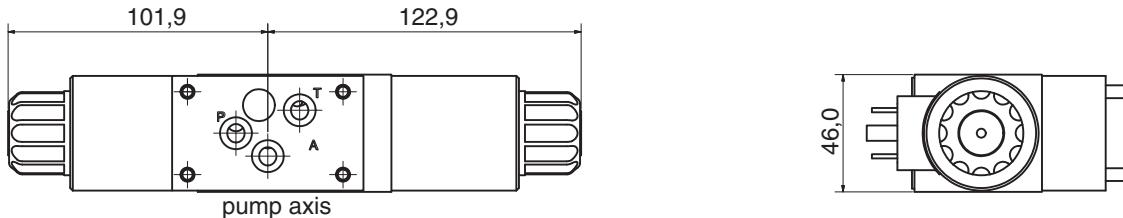

**Dimensions proportional p/Q-control, codes ...UDR, ...UDK, ...UDM**

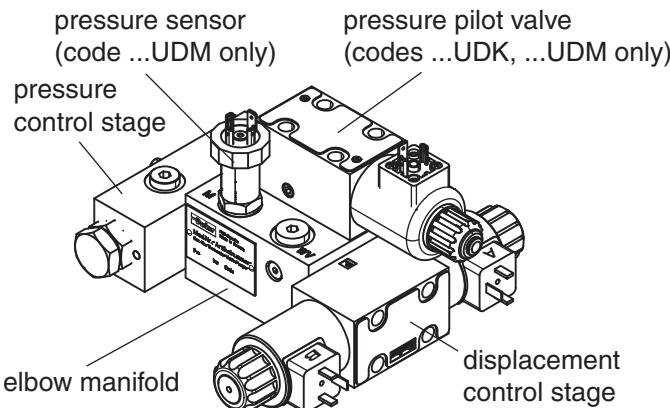

pilot valve:  
 PVACREM...K35 for code ...UDK, UDM  
 \*\* for threads- and seals option

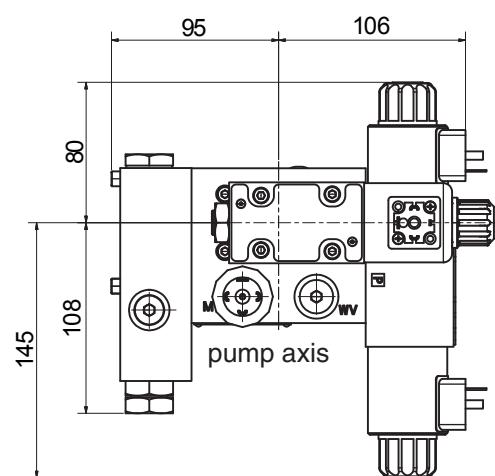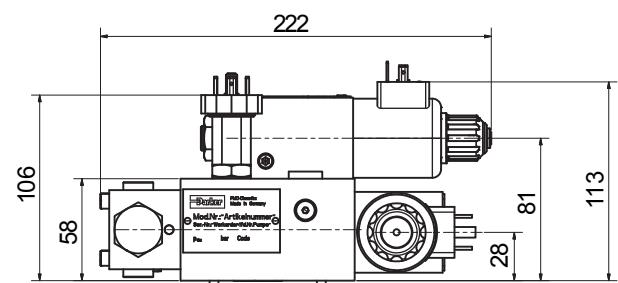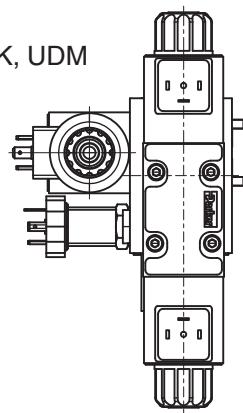

### Features


- Digital control circuit
- Covers all displacements
- Covers all available functions (pressure, displacement, power)
- Predefined parameter sets (Plug & Play)
- Connection via USB cable (USB-A/USB-B)
- Ramp time up to 60 seconds
- Compliant to the relevant european EMC specifications
- Offline editing of parameter sets
- Error diagnosis
- Easy hands on control tuning due to online monitoring of PID gains
- All settings (ramps, MIN/MAX, control parameters) can be stored digitally and recalled from a PC to duplicate settings to other modules

### Technical data

|                          |                    |   |
|--------------------------|--------------------|---|
| Mounting style           |                    | Snap-on mounting for EN50022 rail   |
| Body material            |                    | Polycarbonate   |
| Inflammation class       |                    | V2...V0 acc. UL 94  |
| Mounting position        |                    | any   |
| Env. temperature range   | [°C]               | -20...+55   |
| Protection class         |                    | IP 20 acc. DIN 40 050   |
| Weight                   | [g]                | 260   |
| Duty ratio               | [%]                | 100   |
| Supply voltage           | [V]                | 18...30VDC, ripple <5% eff.   |
| Rush in current          | [A]                | 22 for 0.2 ms   |
| Current consumption      | [A]                | < 4 for p/Q control ; < 2 for Q-control   |
| Resolution Input Command | [%]                | 0.025 (power 0.1)   |
| Interface                |                    | USB - Typ B   |
| EMC                      |                    | EN 50 081-2, EN 50 082-2  |
| Connctors                |                    | Screw terminals 0.2...2.5 mm <sup>2</sup> , plug in style   |
| Cables                   | [mm <sup>2</sup> ] | Supply and solenoid cables; 1,5 mm <sup>2</sup> (AWG16) overall braid shield.<br>Sensor and command signals; 0,5 mm <sup>2</sup> (AWG20) overall braid shield |
| Max. cable length        | [m]                | 50  |

For programming the module via PC an interface cable is needed, please order part number PQDXXA-ZXX-KABEL separately.

### Ordering code

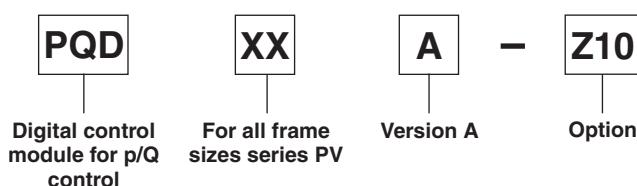

### Programming software

The programming of the p/Q control module is done in an easy to learn mode. To select the pump model and size and to set the control parameters the program ProPVplus must be started. The program runs under common windows systems.

Latest software available at:

[www.parker.com/pmde](http://www.parker.com/pmde)



### Features

- Display and documentation of parameter sets
- Save and reload of optimized parameter sets
- Offers oscilloscope function for easy performance evaluation and optimization
- Parameter sets for all PVplus pumps are pre-installed in the modules

## Features

- Control, monitor and parameter setting via Profinet ® interface
- Covers all displacements and controls (pressure, displacement, power)
- Quick and easy integration with available GSDML and predefined and online available function blocks for I/Os as well as parametrization
- Full integration into overlaying machine control (PLC + HMI) Process parameter, Static Parameter, Conditions
- Predefined data sets for Plug&Play commissioning
- Quick and easy wiring with Push in contact blocks
- Switch function with two RJ45 ports
- Alternative Connection via USB cable (USB-A/USB-B)
- Compatible to the relevant european EMC specification
- Certified by Profibus User Organisation
- Easy error diagnosis




## Technical data

|                          |                    |   |
|--------------------------|--------------------|---|
| Mounting style           |                    | Snap-on mounting for EN50022  |
| Body material            |                    | Polyamide PA6.6   |
| Inflammation class       |                    | V0 acc. UL 94   |
| Mounting position        |                    | any   |
| Env. temperature range   | [°C]               | -20...+55   |
| Protection class         |                    | IP 20 acc. DIN 40 050   |
| Weight                   | [g]                | 260   |
| Duty ratio               | [%]                | 100   |
| Supply voltage           | [V]                | 18...30VDC, ripple <5% eff.   |
| Rush in current          | [A]                | 22 for 0.2 ms   |
| Current consumption      | [A]                | < 4 for p/Q control ; < 2 for Q-control   |
| Resolution Input Command | [%]                | 0.025 (power 0.1)   |
| Interface                |                    | 2 x RJ45, USB-B   |
| EMC                      |                    | EN61000-6-2: 2005 (Immunity), EN61000-6-3: 2007 +A1: 2010 (Emission)  |
| Connectors               |                    | Push in terminals 0.2...2.5 mm <sup>2</sup> , plug in style   |
| Cables                   | [mm <sup>2</sup> ] | Supply and solenoid cables; 1,5 mm <sup>2</sup> (AWG16) overall braid shield.<br>Sensor and command signals; 0,5 mm <sup>2</sup> (AWG20) overall braid shield |
| Max. cable length        | [m]                | 50  |

---

Further information at bulletin HY30-3256-INST/UK

## Ordering code

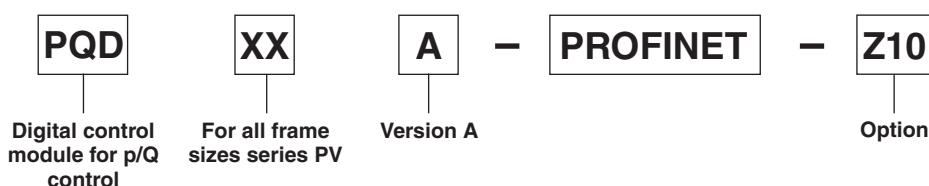

## Programming software


The programming of the p/Q control module is done in an easy to learn mode. To select the pump model and size and to set the control parameters the program ProPVplus must be started. The program runs under common windows systems.

Windows systems.  
Latest software available at:  
[www.parker.com/pmde](http://www.parker.com/pmde)


## Features

- Display and documentation of parameter sets
- Save and reload of optimized parameter sets
- Offers oscilloscope function for easy performance evaluation and optimization
- Parameter sets for all PVplus pumps are pre-installed in the modules

**Mounting kits for multiple pumps, for second pump option**

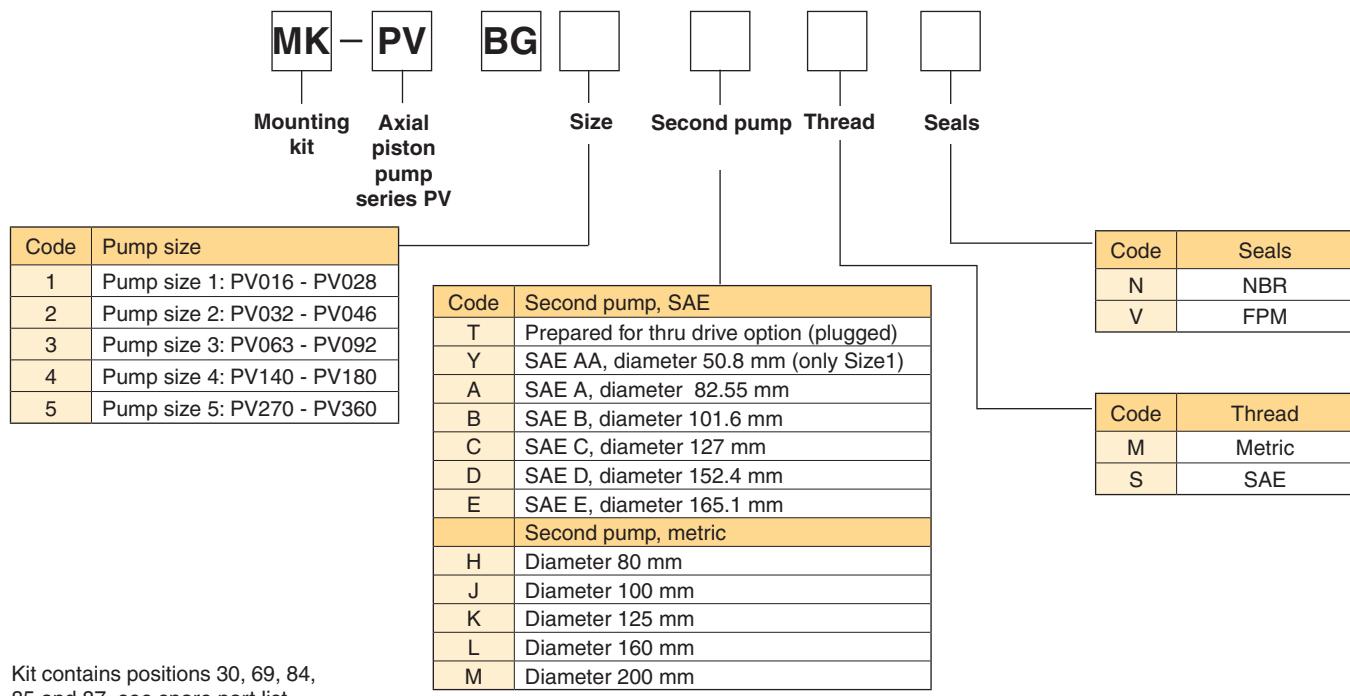

**Mounting kits for multiple pumps, couplings**

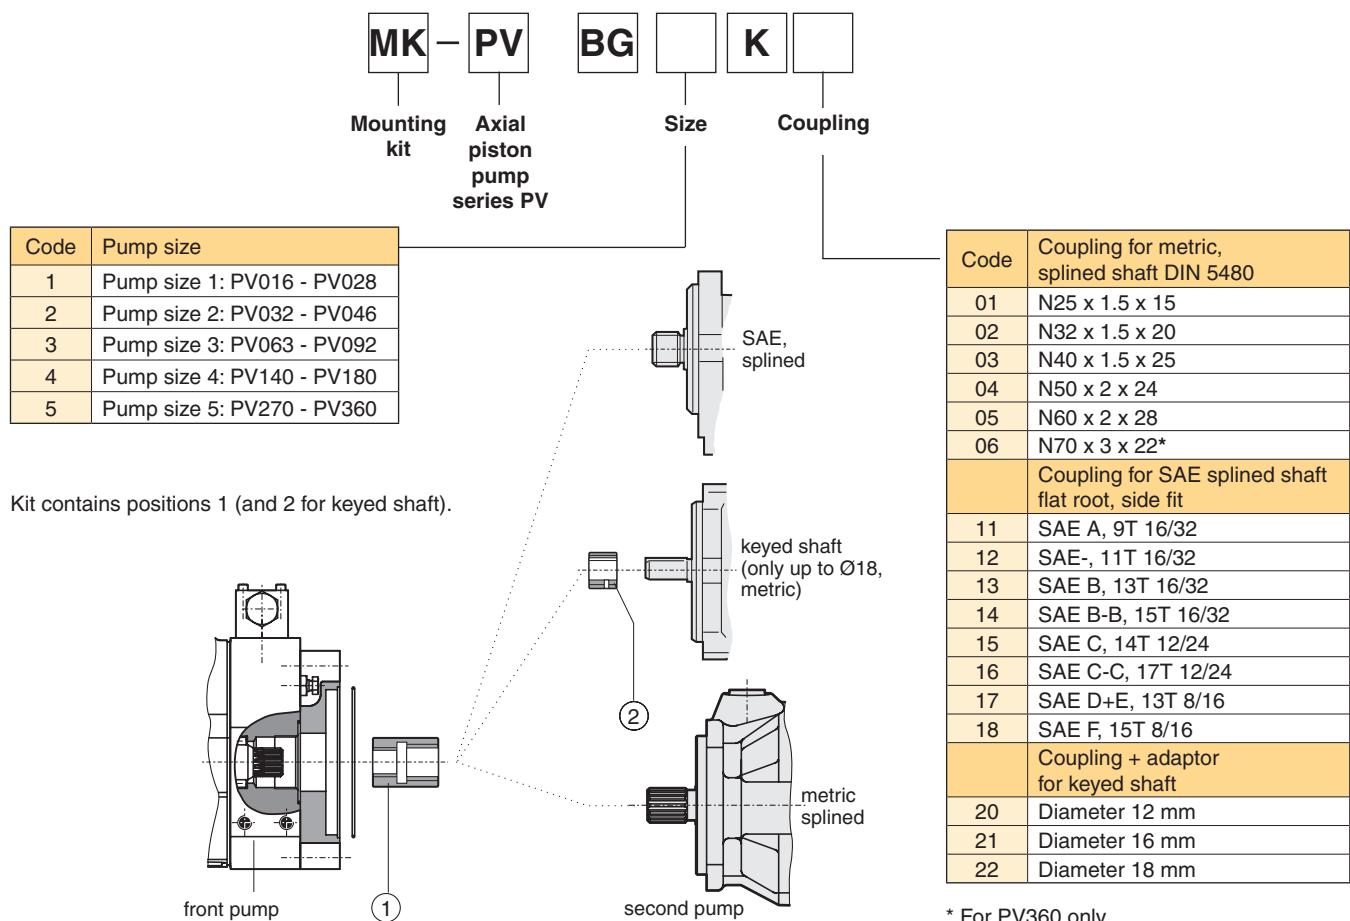


\* For PV360 only

Availability of through drive flange and coupling please check with ordering code options per each pump size, starting at page 6

## Multiple Pump Combinations - Maximum Moment

Combinations of multiple pumps might require additional pump support to avoid a too high stress on the front mounting flange. Combinations of two PVplus pumps in the same frame size generally do not need additional support in an industrial application. For combinations of more pumps support is required.

In case of combinations of a PVplus pump with another type of pump it is recommended to calculate the moment for the combination and compare with the maximum moment in table 1 below.

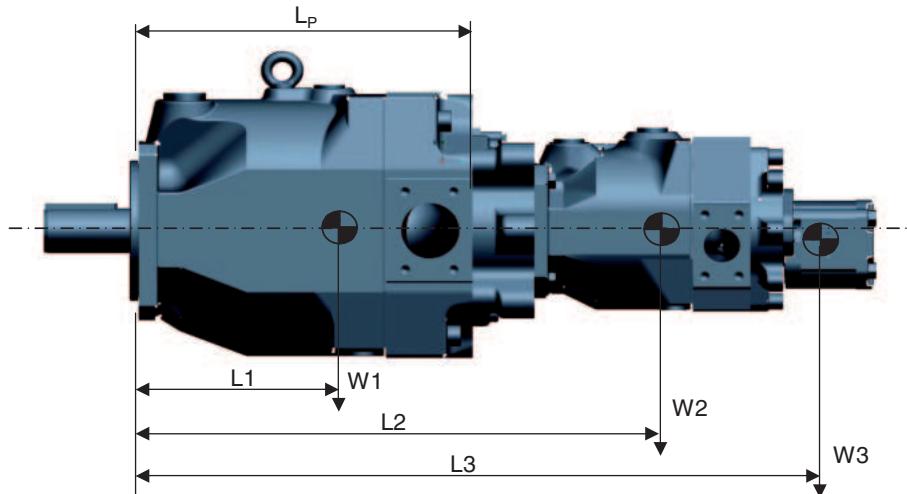

$$\text{Moment } M = (L1 \cdot W1 + L2 \cdot W2 + L3 \cdot W3 + \dots)$$

Note:

If the calculated moment M exceed the maximum moment in table 1 below, additional pump support is needed

**Table 1: Maximum Moment and Pump Dimensions**

|                                   | PV016-PV028 | PV032-PV046 | PV063-PV092 | PV140-PV180 | PV270 | PV360 |
|-----------------------------------|-------------|-------------|-------------|-------------|-------|-------|
| Maximum moment <sup>1)</sup> [Nm] | 81          | 151         | 401         | 591         | 1686  | 1686  |
| Weight W [N]                      | 186         | 294         | 589         | 883         | 1687  | 1766  |
| Distance L1 [mm to C/G]           | 106         | 119         | 178         | 184         | 234   | 238   |
| Distance Lp [mm]                  | 197.5       | 227         | 287         | 350         | 472.5 | 477   |

1) at dynamic weight acceleration 10g = 98.1 m/sec<sup>2</sup>

**Table 2 Through Drive Adapter Plate Thickness [mm]**

| Adapter option <sup>2)</sup> | PV016-PV028 | PV032-PV046 | PV063-PV092 | PV140-PV180 | PV270 | PV360 |
|------------------------------|-------------|-------------|-------------|-------------|-------|-------|
| Y                            | 27          | -           | -           | -           | -     | -     |
| A                            | 27          | 34          | 39          | 65          | 59    | 59    |
| B                            | 27          | 34          | 39          | 65          | 59    | 59    |
| C                            | -           | 49          | 39          | 65          | 59    | 59    |
| D                            | -           | -           | 64          | 65          | 59    | 59    |
| E                            | -           | -           | -           | -           | 59    | 59    |
| G                            | 27          | 34          | 39          | -           | -     | -     |
| H                            | 27          | 34          | 39          | 65          | 59    | 59    |
| J                            | 27          | 34          | 39          | 65          | 59    | 59    |
| K                            | -           | 34          | 39          | 65          | 59    | 59    |
| L                            | -           | -           | 39          | 65          | 59    | 59    |
| M                            | -           | -           | -           | -           | 59    | 59    |

2) See page 6 to 17 for reference per each frame size.

**Maximum allowed transferable torque FRONT**

| Shaft code | Shaft type      | Transferable torque at FRONT shaft end. [Nm] |           |           |           |       |       |
|------------|-----------------|--|-----------|-----------|-----------|-------|-------|
|            |                 | PV016-028                                    | PV032-046 | PV063-092 | PV140-180 | PV270 | PV360 |
| <b>D</b>   | SAE - Key       | 300  | 650       | 1850      | 2150      | 2150  | 4750  |
| <b>E</b>   | SAE - Spline    | 320  | 630       | 1700      | 2750      | 2800  | 8100* |
| <b>F</b>   | SAE - Key       |  |           |           | 1200      |       |       |
| <b>G</b>   | SAE - Spline    |  |           |           | 1700      |       |       |
| <b>R</b>   | Metric - Key    |  |           |           |           |       | 3750  |
| <b>T</b>   | Metric - Spline |  |           |           |           |       | 8100  |
| <b>K</b>   | Metric - Key    | 280  | 640       | 1200      | 1550      | 3300  | 3750  |
| <b>L</b>   | Metric - Spline | 320  | 720       | 1500      | 3050      | 5750  | 8100  |

**Maximum allowed transferable torque REAR**

|   |     |     |      |      |      |      |
|---|-----|-----|------|------|------|------|
| Max. torque transmission cap. for rear mounted pump | 350 | 520 | 1100 | 1550 | 3150 | 3250 |
|---|-----|-----|------|------|------|------|

\* DIN5480 splined

**Important notice**

The max. allowable torque of the individual shaft must not be exceeded. For 2-pump combinations there is no problem because PV series offers 100% through torque. For 3-pump combinations (and more) the limit torque could be reached or exceeded.

Therefore it is necessary to calculate the resulting input as well as through drive torque.







## WARNING – USER RESPONSIBILITY

**FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.**

This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.

To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

## Offer of Sale

Please contact your Parker representation for a detailed "Offer of Sale".

# Parker Worldwide

## Europe, Middle East, Africa

**AE – United Arab Emirates,** Dubai  
Tel: +971 4 8127100  
parker.me@parker.com

**AT – Austria,** Wiener Neustadt  
Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

**AT – Eastern Europe,** Wiener Neustadt  
Tel: +43 (0)2622 23501 900  
parker.easternEurope@parker.com

**AZ – Azerbaijan,** Baku  
Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

**BE/LU – Belgium,** Nivelles  
Tel: +32 (0)67 280 900  
parker.belgium@parker.com

**BG – Bulgaria,** Sofia  
Tel: +359 2 980 1344  
parker.bulgaria@parker.com

**BY – Belarus,** Minsk  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**CH – Switzerland,** Etoy  
Tel: +41 (0)21 821 87 00  
parker.switzerland@parker.com

**CZ – Czech Republic,** Klecany  
Tel: +420 284 083 111  
parker.czechrepublic@parker.com

**DE – Germany,** Kaarst  
Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

**DK – Denmark,** Ballerup  
Tel: +45 43 56 04 00  
parker.denmark@parker.com

**ES – Spain,** Madrid  
Tel: +34 902 330 001  
parker.spain@parker.com

**FI – Finland,** Vantaa  
Tel: +358 (0)20 753 2500  
parker.finland@parker.com

**FR – France,** Contamine s/Arve  
Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

**GR – Greece,** Piraeus  
Tel: +30 210 933 6450  
parker.greece@parker.com

**HU – Hungary,** Budaörs  
Tel: +36 23 885 470  
parker.hungary@parker.com

**IE – Ireland,** Dublin  
Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

**IL – Israel**  
Tel: +39 02 45 19 21  
parker.israel@parker.com

**IT – Italy,** Corsico (MI)  
Tel: +39 02 45 19 21  
parker.italy@parker.com

**KZ – Kazakhstan,** Almaty  
Tel: +7 7273 561 000  
parker.easternEurope@parker.com

**NL – The Netherlands,** Oldenzaal  
Tel: +31 (0)541 585 000  
parker.nl@parker.com

**NO – Norway,** Asker  
Tel: +47 66 75 34 00  
parker.norway@parker.com

**PL – Poland,** Warsaw  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**PT – Portugal**  
Tel: +351 22 999 7360  
parker.portugal@parker.com

**RO – Romania,** Bucharest  
Tel: +40 21 252 1382  
parker.romania@parker.com

**RU – Russia,** Moscow  
Tel: +7 495 645-2156  
parker.russia@parker.com

**SE – Sweden,** Spånga  
Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

**SK – Slovakia,** Banská Bystrica  
Tel: +421 484 162 252  
parker.slovakia@parker.com

**SL – Slovenia,** Novo Mesto  
Tel: +386 7 337 6650  
parker.slovenia@parker.com

**TR – Turkey,** Istanbul  
Tel: +90 216 4997081  
parker.turkey@parker.com

**UA – Ukraine,** Kiev  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**UK – United Kingdom,** Warwick  
Tel: +44 (0)1926 317 878  
parker.uk@parker.com

**ZA – South Africa,** Kempton Park  
Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

## North America

**CA – Canada,** Milton, Ontario  
Tel: +1 905 693 3000

**US – USA,** Cleveland  
Tel: +1 216 896 3000

## Asia Pacific

**AU – Australia,** Castle Hill  
Tel: +61 (0)2-9634 7777

**CN – China,** Shanghai  
Tel: +86 21 2899 5000

**HK – Hong Kong**  
Tel: +852 2428 8008

**IN – India,** Mumbai  
Tel: +91 22 6513 7081-85

**JP – Japan,** Tokyo  
Tel: +81 (0)3 6408 3901

**KR – South Korea,** Seoul  
Tel: +82 2 559 0400

**MY – Malaysia,** Shah Alam  
Tel: +60 3 7849 0800

**NZ – New Zealand,** Mt Wellington  
Tel: +64 9 574 1744

**SG – Singapore**  
Tel: +65 6887 6300

**TH – Thailand,** Bangkok  
Tel: +662 186 7000

**TW – Taiwan,** Taipei  
Tel: +886 2 2298 8987

## South America

**AR – Argentina,** Buenos Aires  
Tel: +54 3327 44 4129

**BR – Brazil,** Sao Jose dos Campos  
Tel: +55 800 727 5374

**CL – Chile,** Santiago  
Tel: +56 2 623 1216

**MX – Mexico,** Toluca  
Tel: +52 72 2275 4200

### EMEA Product Information Centre

**Free phone:** 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

### US Product Information Centre

**Toll-free number:** 1-800-27 27 537

[www.parker.com/pmde](http://www.parker.com/pmde)

